

Galaxy VX

480 V UPS System

Technical Specifications

Latest updates are available on the Schneider Electric website

11/2024



Legal Information

The information provided in this document contains general descriptions, technical characteristics and/or recommendations related to products/solutions.

This document is not intended as a substitute for a detailed study or operational and site-specific development or schematic plan. It is not to be used for determining suitability or reliability of the products/solutions for specific user applications. It is the duty of any such user to perform or have any professional expert of its choice (integrator, specifier or the like) perform the appropriate and comprehensive risk analysis, evaluation and testing of the products/solutions with respect to the relevant specific application or use thereof.

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this document are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owner.

This document and its content are protected under applicable copyright laws and provided for informative use only. No part of this document may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the document or its content, except for a non-exclusive and personal license to consult it on an "as is" basis.

Schneider Electric reserves the right to make changes or updates with respect to or in the content of this document or the format thereof, at any time without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this document, as well as any non-intended use or misuse of the content thereof.

Access to Your Product Manuals Online

Find the UPS Manuals, Submittal Drawings, and Other Documentation for Your Specific UPS Here:

In your web browser, type in <https://www.go2se.com/ref=> and the commercial reference for your product.

Example: <https://www.go2se.com/ref=GVX1500K1500GS>

Find the UPS Manuals, Relevant Auxiliary Product Manuals, and Option Manuals Here:

Scan the QR code to go to the Galaxy VX online manual portal:

UL (480 V)



https://www.productinfo.schneider-electric.com/galaxyvx_ul/

Here you can find your UPS installation manual, UPS operation manual, and UPS technical specifications, and you can also find installation manuals for your auxiliary products and options.

This online manual portal is available on all devices and offers digital pages, search functionality across the different documents in the portal, and PDF download for offline use.

Learn More About the Galaxy VX Here:

Go to <https://www.se.com/ww/en/product-range/63732> to learn more about this product.

Table of Contents

| | |
|--|----|
| Important Safety Instructions — SAVE THESE | |
| INSTRUCTIONS | 7 |
| FCC Statement | 8 |
| Safety Precautions | 8 |
| Technical Data | 10 |
| System Overview | 10 |
| Model List | 12 |
| Overview of Configurations | 14 |
| Overview of UPSs with 1250 kW I/O Cabinet - Single Utility/ Mains | 14 |
| Overview of UPSs with 1250 kW I/O Cabinet - Dual Utility/Mains | 15 |
| Overview of UPSs with 1500 kW I/O Cabinet – Single Utility/ Mains | 15 |
| Overview of UPSs with 1500 kW I/O Cabinet – Dual Utility/Mains | 16 |
| Parallel System | 16 |
| Input Power Factor | 17 |
| Input Voltage Window | 17 |
| Inverter Short-Circuit Capabilities (Bypass not Available) | 18 |
| Efficiency for UPSs with 1250 kW I/O Cabinet | 21 |
| Efficiency for UPSs with 1500 kW I/O Cabinet | 23 |
| Derating Due to Load Power Factor | 25 |
| Batteries (VRLA) | 26 |
| End of Discharge Voltage | 26 |
| Battery Voltage Range (VRLA) | 26 |
| Compliance | 27 |
| Communication and Management | 28 |
| EPO Connections | 28 |
| Overview of Input Contacts and Output Relays | 29 |
| Facility Planning | 31 |
| Specifications for 500 kW UPS | 31 |
| Specifications for 625 kW UPS | 33 |
| Specifications for 750 kW UPS | 35 |
| Specifications for 800 kW UPS | 37 |
| Specifications for 1000 kW UPS | 39 |
| Specifications for 1100 kW UPS | 41 |
| Specifications for 1250 kW UPS | 43 |
| Specifications for 1500 kW UPS | 45 |
| Recommended Upstream Protection and Cable Sizes – UL | 47 |
| Recommended Bolt and Lug Sizes for Copper Cables | 50 |
| Recommended Bolt and Lug Sizes for Aluminium Cables | 50 |
| Weights and Dimensions | 51 |
| UPS Shipping Weights and Dimensions | 51 |
| Weights and Dimensions for UPSs with 1250 kW I/O Cabinet | 51 |
| Weights and Dimensions for UPSs with 1500 kW I/O Cabinet | 52 |
| Clearance | 53 |
| Clearance for UPSs with 1250 kW I/O Cabinet | 53 |
| Clearance for UPSs with 1500 kW I/O Cabinet | 53 |

| | |
|---|----|
| Guidance for Organizing Battery Cables..... | 54 |
| Torque Specifications..... | 54 |
| Environment..... | 55 |
| Heat Dissipation (BTU/hr) for UPSs with 1250 kW I/O Cabinet | 56 |
| Heat Dissipation (BTU/hr) for UPSs with 1500 kW I/O Cabinet | 59 |
| Options | 61 |
| Configuration Options | 61 |
| Hardware Options..... | 62 |
| Limited Factory Warranty..... | 63 |

Important Safety Instructions — SAVE THESE INSTRUCTIONS

Read these instructions carefully and look at the equipment to become familiar with it before trying to install, operate, service or maintain it. The following safety messages may appear throughout this manual or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of this symbol to a “Danger” or “Warning” safety message indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages with this symbol to avoid possible injury or death.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **will result in death or serious injury**.

Failure to follow these instructions will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, **could result in death or serious injury**.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, **could result in minor or moderate injury**.

Failure to follow these instructions can result in injury or equipment damage.

NOTICE

NOTICE is used to address practices not related to physical injury. The safety alert symbol shall not be used with this type of safety message.

Failure to follow these instructions can result in equipment damage.

Please Note

Electrical equipment should only be installed, operated, serviced, and maintained by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Safety Precautions

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- The product must be installed according to the specifications and requirements as defined by Schneider Electric. It concerns in particular the external and internal protections (upstream circuit breakers, battery circuit breakers, cabling, etc.) and environmental requirements. No responsibility is assumed by Schneider Electric if these requirements are not respected.
- After the UPS system has been electrically wired, do not start up the system. Start-up must only be performed by Schneider Electric.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The UPS System must be installed according to local and national regulations. Install the UPS according to:

- IEC 60364 (including 60364-4-41- protection against electric shock, 60364-4-42 - protection against thermal effect, and 60364-4-43 - protection against overcurrent), **or**
- NEC NFPA 70

depending on which one of the standards apply in your local area.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Install the UPS system in a temperature controlled area free of conductive contaminants and humidity.
- Install the UPS system on a non-flammable, level, and solid surface (e.g. concrete) that can support the weight of the system.

Failure to follow these instructions will result in death or serious injury.

⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The UPS is not designed for and must therefore not be installed in the following unusual operating environments:

- Damaging fumes
- Explosive mixtures of dust or gases, corrosive gases, or conductive or radiant heat from other sources
- Moisture, abrasive dust, steam or in an excessively damp environment
- Fungus, insects, vermin
- Salt-laden air or contaminated cooling refrigerant
- Pollution degree higher than 2 according to IEC 60664-1
- Exposure to abnormal vibrations, shocks, and tilting
- Exposure to direct sunlight, heat sources, or strong electromagnetic fields

Failure to follow these instructions will result in death or serious injury.

NOTICE

RISK OF OVERHEATING

Respect the clearance requirements around the UPS system and do not cover the product's ventilation openings when the UPS system is in operation.

Failure to follow these instructions can result in equipment damage.

NOTICE

RISK OF EQUIPMENT DAMAGE

Do not connect the UPS output to regenerative load systems including photovoltaic systems and speed drives.

Failure to follow these instructions can result in equipment damage.

Technical Data


System Overview

Each Galaxy VX UPS consists of the following components:

- An I/O cabinet for wild wiring containing the static switch, a backfeed breaker BF2¹, and the user interface.
- A number of 250 kW power cabinets containing the power electronics.


UPSs with 1250 kW I/O Cabinet

The 1250 kW I/O cabinet is used for UPS systems from a minimum configuration of 500 kW with two power cabinets to a maximum configuration of 1250 kW N+1 with six power cabinets. The I/O cabinet is placed to the left and two to six power cabinets (depending on system size) are placed to the right. The image below shows the maximum configuration.

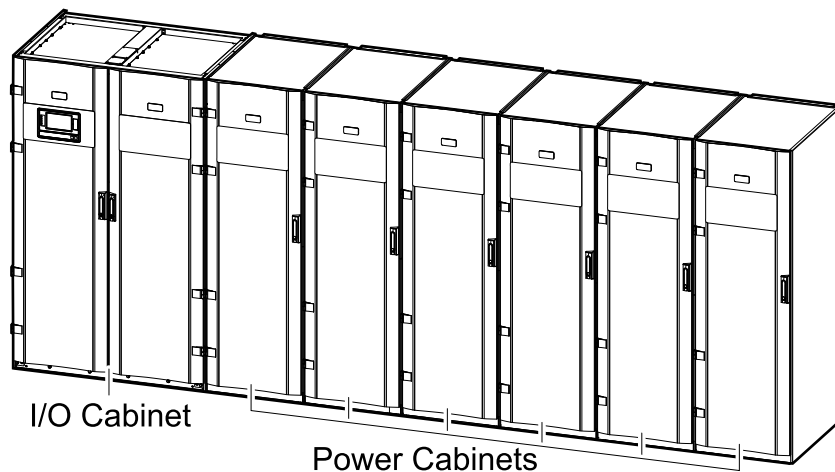

UPSs with 1500 kW I/O Cabinet

The 1500 kW I/O cabinet is used for UPS systems from a minimum configuration of 500 kW with two power cabinets to a maximum configuration of 1500 kW N+1 with seven power cabinets. The image below shows the maximum configuration.

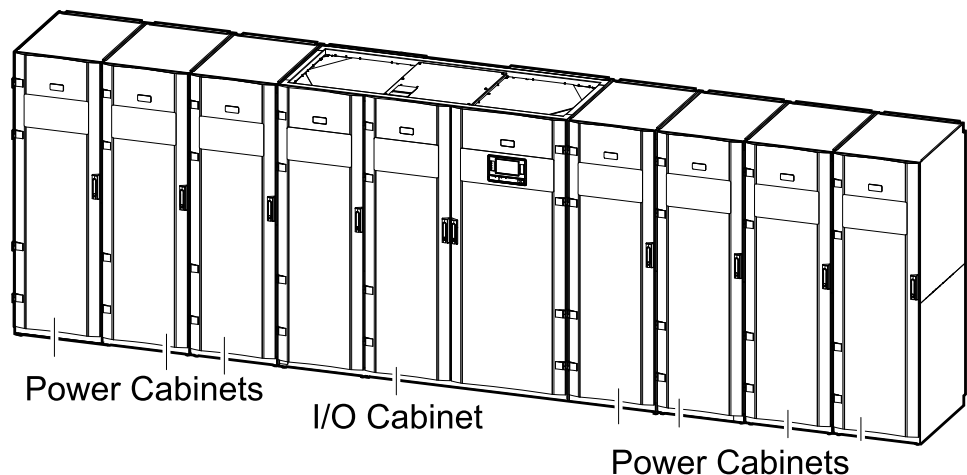


1. For a 1250 kW I/O cabinet, the BF2 can be installed internal in the UPS or externally in the switchgear.

Maintenance Bypass Cabinet for UPSs with a Maximum Rating of 750 kW

The maintenance bypass cabinet contains the following breakers to isolate the UPS during maintenance:

- Static switch input breaker (SSIB)
- Maintenance bypass breaker (MBB)
- Unit output breaker (UOB)

Maintenance Bypass Cabinet

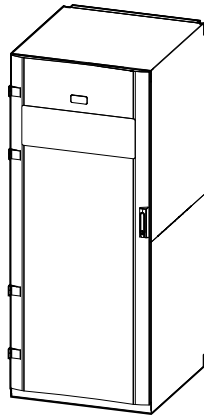

Model List

UPSs with 1250 kW I/O Cabinet

- Galaxy VX 500 kW, 480 V, start-up 5x8 (GVX500K500NGS)
- Galaxy VX 500 kW scalable to 750 kW 480 V, start-up 5x8 (GVX500K750NGS)
- Galaxy VX 500 kW scalable to 1000 kW 480 V, start-up 5x8 (GVX500K1000NGS)
- Galaxy VX 500 kW scalable to 1250 kW 480 V, start-up 5x8 (GVX500K1250NGS)
- Galaxy VX 625 kW, 480 V, start-up 5x8 (GVX625K625NGS)
- Galaxy VX 625 kW scalable to 1000 kW 480 V, start-up 5x8 (GVX625K1000NGS)
- Galaxy VX 500 kW N+1 redundant UPS 480 V, start-up 5x8 (GVX750K500NGS)
- Galaxy VX 750 kW, 480 V, start-up 5x8 (GVX750K750NGS)
- Galaxy VX 750 kW scalable to 1000 kW 480 V, start-up 5x8 (GVX750K1000NGS)
- Galaxy VX 750 kW scalable to 1250 kW 480 V, start-up 5x8 (GVX750K1250NGS)
- Galaxy VX 800 kW, 480 V, start-up 5x8 (GVX800K800NGS)
- Galaxy VX 750 kW N+1 redundant UPS 480 V, start-up 5x8 (GVX1000K750NGS)
- Galaxy VX 1000 kW, 480 V, start-up 5x8 (GVX1000K1000NGS)
- Galaxy VX 1000 kW scalable to 1250 kW 480 V, start-up 5x8 (GVX1000K1250NGS)
- Galaxy VX 1100 kW, 480 V, Start-up 5x8 (GVX1100K1100NGS)
- Galaxy VX 1000 kW N+1 redundant UPS 480 V, start-up 5x8 (GVX1250K1000NGS)
- Galaxy VX 1250 kW, 480 V, start-up 5x8 (GVX1250K1250NGS)
- Galaxy VX 1100 kW N+1 Redundant UPS 480 V, Start up 5x8 (GVX1500K1100NGS)
- Galaxy VX 1250 kW N+1 Redundant UPS 480 V, start-up 5x8 (GVX1500K1250NGS)
- Galaxy VX 1250 kW I/O Cabinet without Backfeed protection on Mains 2 (GVXI1250KDNBF2)². Requires ordering the 250 kW power cabinets separately.

2. Backfeed protection can be installed internally in the 1250 kW I/O cabinet with the optional backfeed kit (GVXOPT001) (ordered separately), or installed externally upstream of the UPS in the switchgear.

UPSs with 1500 kW I/O Cabinet

- Galaxy VX 500 kW 480 V scalable to 1500 kW, start-up 5x8 (GVX500K1500GS)
- Galaxy VX 750 kW 480 V scalable to 1500 kW, start-up 5x8 (GVX750K1500GS)
- Galaxy VX 1000 kW scalable to 1500 kW 480 V, start-up 5x8 (GVX1000K1500GS)
- Galaxy VX 1250 kW scalable to 1500 kW 480 V, start-up 5x8 (GVX1250K1500GS)
- Galaxy VX 1500 kW 480 V, start-up 5x8 (GVX1500K1500GS)
- Galaxy VX 1500 kW N+1 Redundant UPS 480 V, start-up 5x8 (GVX1750K1500GS)

Overview of Configurations


Breakers in the System

| | |
|------|-----------------------------|
| UIB | Unit input breaker |
| SSIB | Static switch input breaker |
| BB | Battery breaker |
| MBB | Maintenance bypass breaker |
| UOB | Unit output breaker |
| BF2 | Backfeed protection switch |

Overview of UPSs with 1250 kW I/O Cabinet - Single Utility/Mains

NOTE: Depending on your chosen configuration, the backfeed breaker BF2 (marked with * in the illustration) can be preinstalled in the UPS, delivered as an optional backfeed kit GVXOPT001 to be installed in the UPS, or installed upstream of the UPS in the switchgear.


The illustration shows a 750 kW UPS. The principle is the same for the other UPSs with the 1250 kW I/O cabinet.

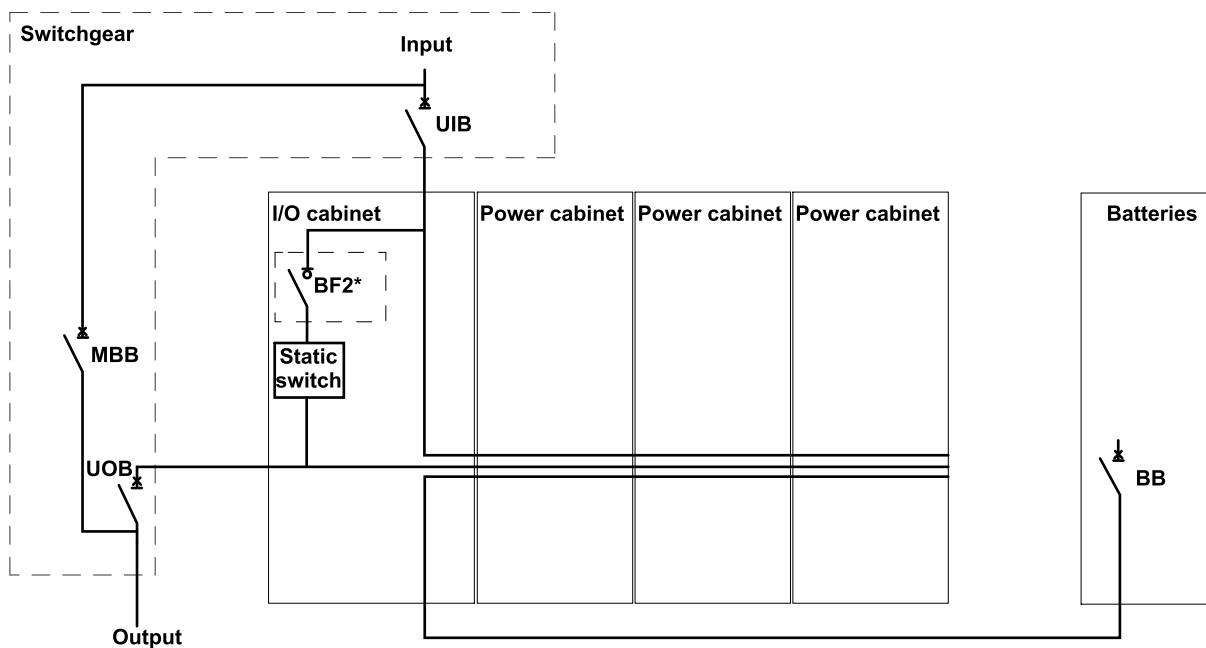

Overview of UPSs with 1250 kW I/O Cabinet - Dual Utility/Mains

NOTE: Depending on your chosen configuration, the backfeed breaker BF2 (marked with * in the illustration) can be preinstalled in the UPS, delivered as an optional backfeed kit GVXOPT001 to be installed in the UPS, or installed upstream of the UPS in the switchgear.


The illustration shows a 750 kW UPS. The principle is the same for the other UPSs with the 1250 kW I/O cabinet.

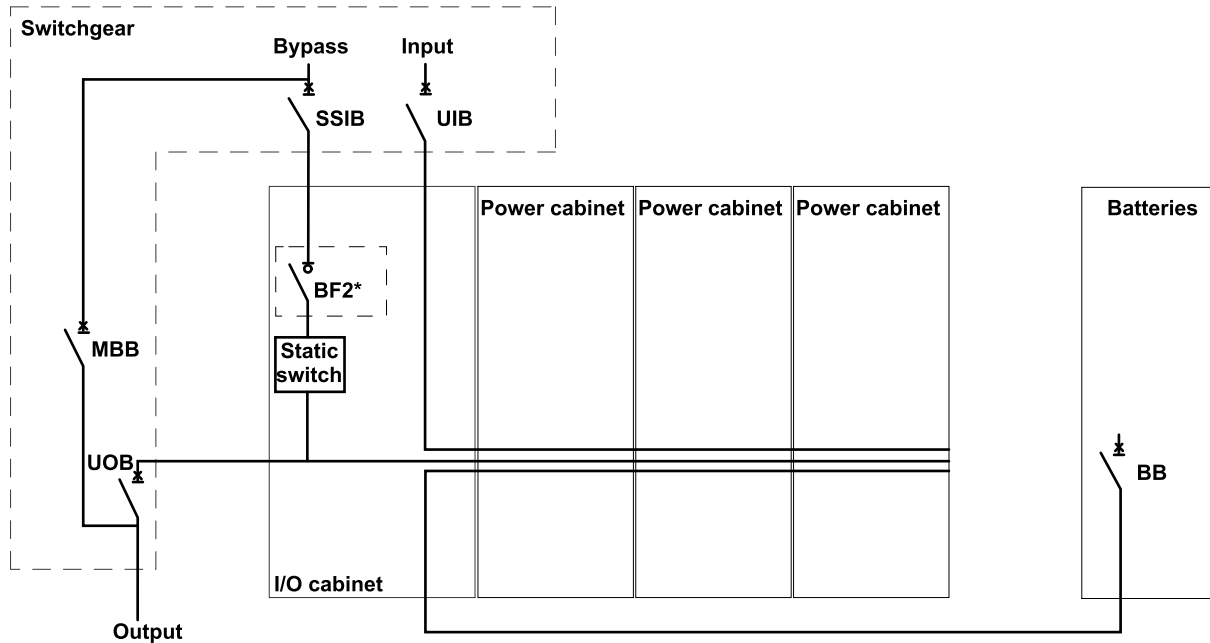

Overview of UPSs with 1500 kW I/O Cabinet – Single Utility/Mains

The illustration shows a 1500 kW UPS. The principle is the same for the other UPSs with the 1500 kW I/O cabinet.


Galaxy VX 1500 kW UPS

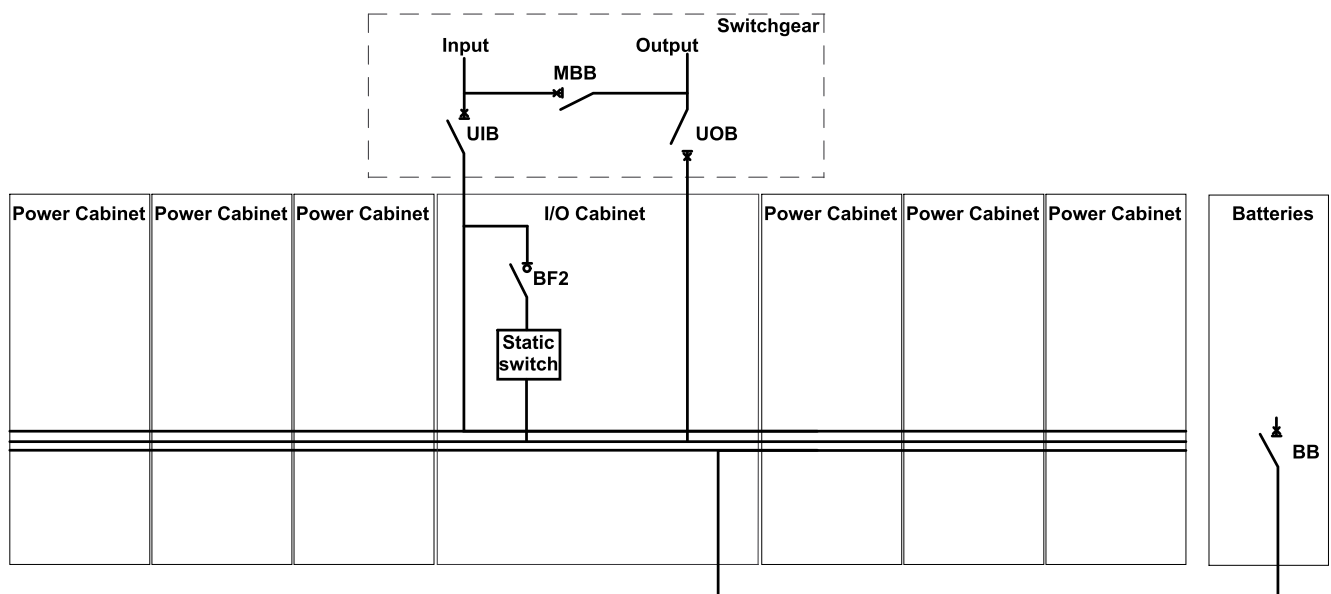

Overview of UPSs with 1500 kW I/O Cabinet – Dual Utility/Mains

The illustration shows a 1500 kW UPS. The principle is the same for the other UPSs with the 1500 kW I/O cabinet.

Galaxy VX 1500 kW UPS

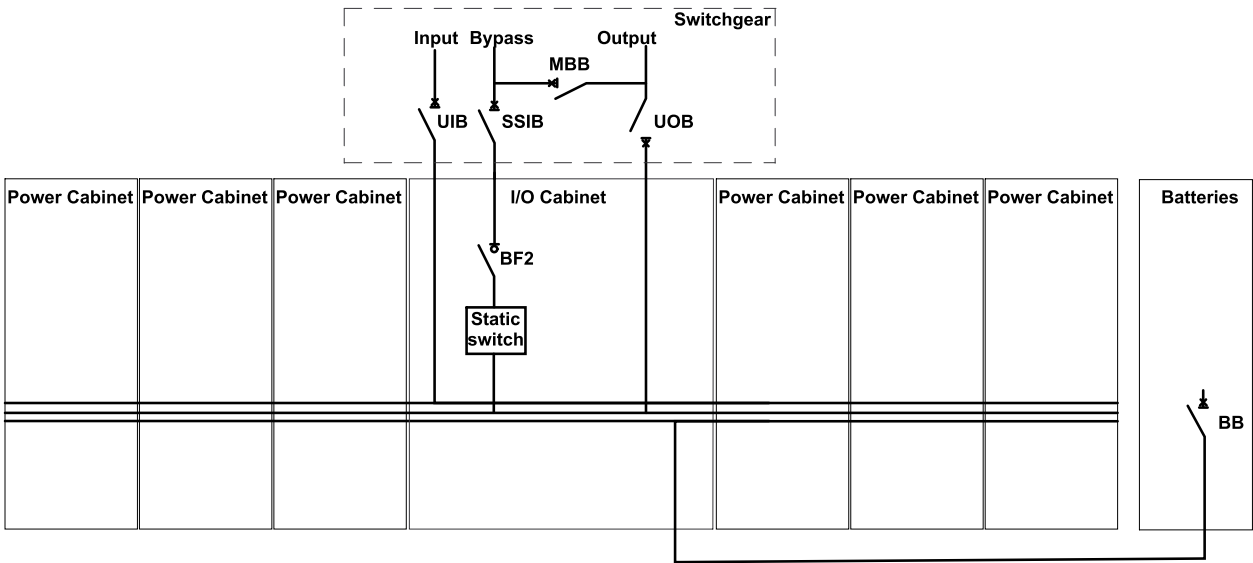

Parallel System


Galaxy VX can support up to 4+0 UPSs in parallel for capacity and up to 4+1 UPSs in parallel for redundancy.

NOTE: Note that for systems over 4 MW it can be difficult to find appropriate breakers/switches in the correct size for the switchgear.

Input Power Factor


| | 500 kW | 625 kW | 750 kW | 800 kW | 1000 kW | 1100 kW | 1250 kW | 1500 kW |
|-----------|--------|--------|--------|--------|---------|---------|---------|---------|
| 25% load | 0.98 | 0.98 | 0.98 | 0.98 | 0.98 | 0.98 | 0.98 | 0.98 |
| 50% load | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 |
| 75% load | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 |
| 100% load | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 | 0.99 |

Input Voltage Window

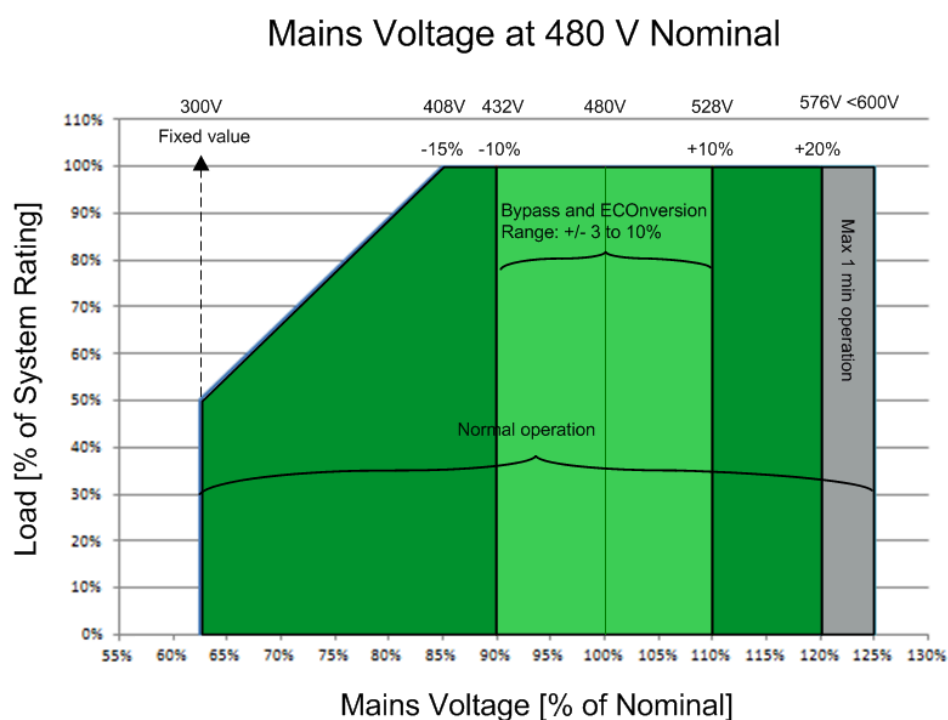

Inverter Short-Circuit Capabilities (Bypass not Available)


IK1 – Short-Circuit between a Phase and Neutral

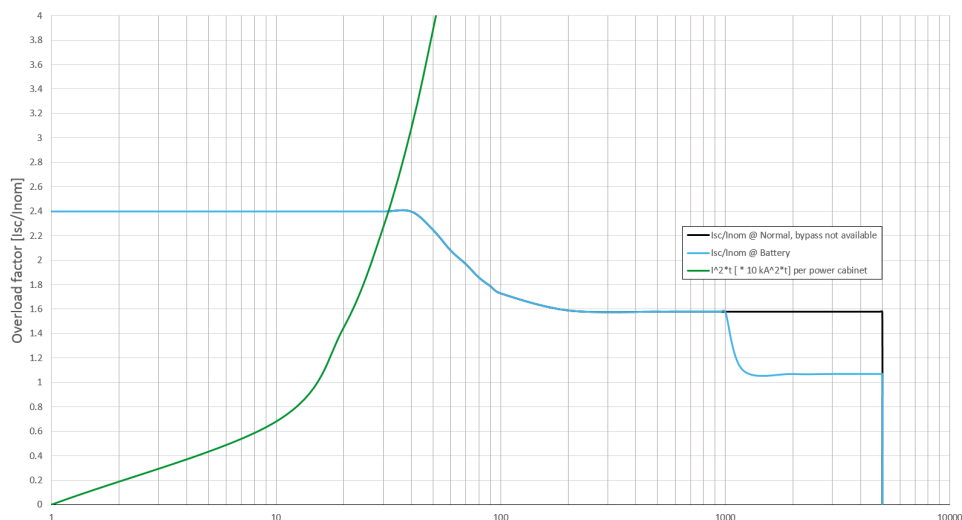

480 V IK1

| S [kVA] | Ik10ms [A] Normal operation /Battery operation | Ik30ms [A] Normal operation /Battery operation | Ik100ms [A] Normal operation /Battery operation | Ik500ms [A] Normal operation /Battery operation | Ik1s [A] Normal operation /Battery operation | Ik5s [A] Normal operation /Battery operation | I² t total [A²s] Normal operation /Battery operation |
|-------------|--|--|---|---|--|--|--|
| 250 | — /810 | — /810 | — /570 | — /290 | — /290 | — /290 | — /493600 |
| 500 | — /1620 | — /1620 | — /1140 | — /580 | — /580 | — /580 | — /1974400 |
| 750 | — /2430 | — /2430 | — /1710 | — /870 | — /870 | — /870 | — /4442400 |
| 1000 | — /3240 | — /3240 | — /2280 | — /1160 | — /1160 | — /1160 | — /7897600 |
| 1250 | — /4050 | — /4050 | — /2850 | — /1450 | — /1450 | — /1450 | — /12340000 |
| 1500 | — /4860 | — /4860 | — /3420 | — /1740 | — /1740 | — /1740 | — /17769600 |


IK2 – Short-Circuit between Two Phases

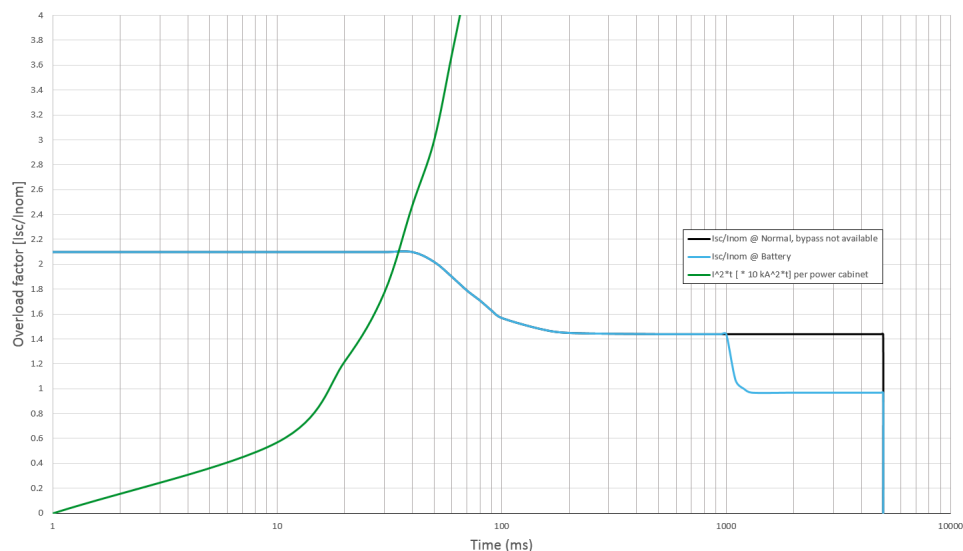

480 V IK2

| S [kVA] | Ik10ms [A] Normal operation /Battery operation | Ik30ms [A] Normal operation /Battery operation | Ik100ms [A] Normal operation /Battery operation | Ik500ms [A] Normal operation /Battery operation | Ik1s [A] Normal operation /Battery operation | Ik5s [A] Normal operation /Battery operation | I ² t total [A ² s] Normal operation /Battery operation |
|---------|--|--|---|---|--|--|---|
| 250 | 790 /790 | 770 /770 | 550 /550 | 430 /280 | 430 /280 | 280 /280 | 606450 /460820 |
| 500 | 1580 /1580 | 1540 /1540 | 1100 /1100 | 860 /560 | 860 /560 | 560 /560 | 2425800 /1843280 |
| 750 | 2370 /2370 | 2310 /2310 | 1650 /1650 | 1290 /840 | 1290 /840 | 840 /840 | 5458050 /4147380 |
| 1000 | 3160 /3160 | 3080 /3080 | 2200 /2200 | 1720 /1120 | 1720 /1120 | 1120 /1120 | 9703200 /7373120 |
| 1250 | 3950 /3950 | 3850 /3850 | 2750 /2750 | 2150 /1400 | 2150 /1400 | 1400 /1400 | 15161250 /11520500 |
| 1500 | 4740 /4740 | 4620 /4620 | 3300 /3300 | 2580 /1680 | 2580 /1680 | 1680 /1680 | 21832200 /16589520 |

IK3 – Short-Circuit between All Three Phases

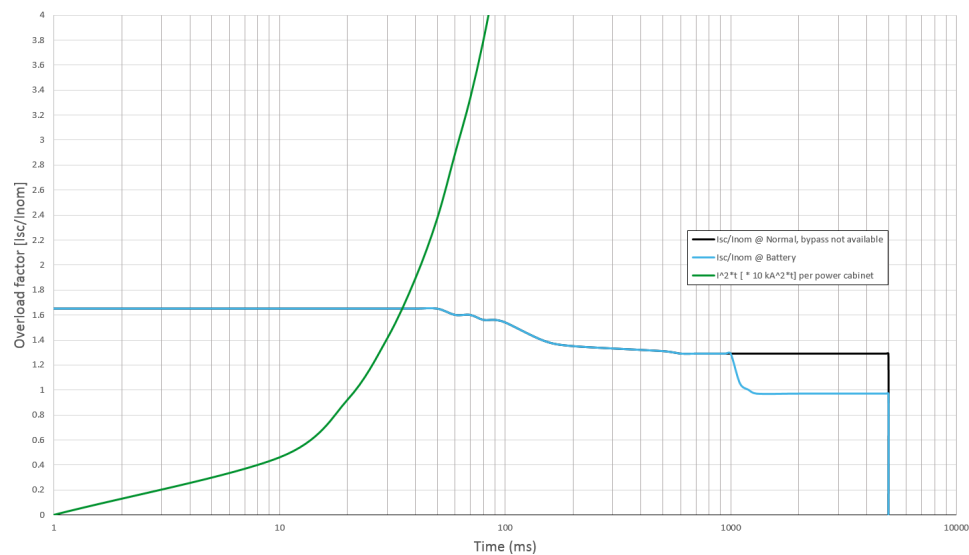

480 V IK3

| S [kVA] | Ik10ms [A] Normal operation /Battery operation | Ik30ms [A] Normal operation /Battery operation | Ik100ms [A] Normal operation /Battery operation | Ik500ms [A] Normal operation /Battery operation | Ik1s [A] Normal operation /Battery operation | Ik5s [A] Normal operation /Battery operation | I² t total [A²s] Normal operation /Battery operation |
|---------|--|--|---|---|--|--|--|
| 250 | 670 /660 | 670 /660 | 610 /610 | 440 /440 | 360 /440 | 300 /300 | 580600 /589380 |
| 500 | 1340 /1320 | 1340 /1320 | 1220 /1220 | 880 /880 | 720 /880 | 600 /600 | 2322400 /2357520 |
| 650 | 1742 /1716 | 1742 /1716 | 1586 /1586 | 1144 /1144 | 936 /1144 | 780 /780 | 3924856 /3984209 |
| 1000 | 2680 /2640 | 2680 /2640 | 2440 /2440 | 1760 /1760 | 1440 /1760 | 1200 /1200 | 9289600 /9430080 |
| 1250 | 3350 /3300 | 3350 /3300 | 3050 /3050 | 2200 /2200 | 1800 /2200 | 1500 /1500 | 14515000 /14734500 |
| 1500 | 4020 /3960 | 4020 /3960 | 3660 /3660 | 2640 /2640 | 2160 /2640 | 1800 /1800 | 20901600 /21217680 |

Efficiency for UPSs with 1250 kW I/O Cabinet

Efficiency for a 500 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 94.9% | 97.3% | 96.9% | 96.6% |
| 50% load | 95.9% | 98.4% | 98.2% | 96.7% |
| 75% load | 96.0% | 98.8% | 98.7% | 96.3% |
| 100% load | 95.9% | 99.0% | 98.9% | 95.9% |

Efficiency for a 625 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.0% | 97.5% | 97.1% | 95.8% |
| 50% load | 96.2% | 98.6% | 98.4% | 96.2% |
| 75% load | 96.3% | 98.8% | 98.7% | 96.3% |
| 100% load | 96.2% | 99.0% | 98.9% | 96.2% |

Efficiency for a 750 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.4% | 97.9% | 97.7% | 96.5% |
| 50% load | 96.1% | 98.6% | 98.5% | 96.6% |
| 75% load | 96.0% | 98.8% | 98.7% | 96.2% |
| 100% load | 95.8% | 98.9% | 98.9% | 95.8% |

Efficiency for an 800 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.2% | 98.7% | 97.4% | 96.9% |
| 50% load | 96.2% | 98.9% | 98.5% | 96.6% |
| 75% load | 96.1% | 98.9% | 98.8% | 96.8% |
| 100% load | 96.3% | 99.0% | 99.1% | 96.3% |

Efficiency for a 1000 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.6% | 98.1% | 97.9% | 96.6% |
| 50% load | 96.3% | 98.8% | 98.7% | 96.7% |
| 75% load | 96.2% | 99.0% | 98.9% | 96.3% |
| 100% load | 96.0% | 99.1% | 99.1% | 95.9% |

Efficiency for a 1100 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.8% | 98.3% | 97.8% | 96.3% |
| 50% load | 96.4% | 98.9% | 98.7% | 96.5% |
| 75% load | 96.3% | 99.0% | 98.9% | 96.4% |
| 100% load | 96.1% | 99.1% | 99.0% | 96.1% |

Efficiency for a 1250 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.8% | 98.3% | 97.9% | 96.6% |
| 50% load | 96.4% | 98.9% | 98.7% | 96.6% |
| 75% load | 96.2% | 99.1% | 99.0% | 96.3% |
| 100% load | 96.0% | 99.1% | 99.1% | 96.1% |

Efficiency for UPSs with 1500 kW I/O Cabinet

Efficiency for a 500 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.8% | 98.5% | 98.2% | 95.9% |
| 50% load | 96.4% | 99.1% | 99.1% | 96.4% |
| 75% load | 96.2% | 99.2% | 99.2% | 96.0% |
| 100% load | 96.1% | 99.2% | 99.2% | 95.6% |

Efficiency for a 750 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.9% | 98.5% | 98.2% | 95.9% |
| 50% load | 96.5% | 99.1% | 99.0% | 96.4% |
| 75% load | 96.3% | 99.2% | 99.2% | 96.0% |
| 100% load | 96.0% | 99.2% | 99.2% | 95.6% |

Efficiency for a 1000 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 95.9% | 98.6% | 98.2% | 95.9% |
| 50% load | 96.5% | 99.1% | 99.0% | 96.4% |
| 75% load | 96.4% | 99.2% | 99.2% | 96.0% |
| 100% load | 95.9% | 99.2% | 99.2% | 95.6% |

Efficiency for a 1250 kW UPS


| | Normal operation | ECO mode | eConversion | Battery operation |
|--------------------|------------------|------------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 96.0% | 98.7% | 98.3% | 95.9% |
| 50% load | 96.6% | 99.2% | 99.1% | 96.4% |
| 75% load | 96.4% | 99.3% | 99.3% | 96.0% |
| 100% load | 96.0% | 99.3% | 99.3% | 95.6% |

Efficiency for a 1500 kW UPS

| | Normal operation | ECO mode | eConversion | Battery operation |
|-------------|------------------|----------|-------------|-------------------|
| Voltage (V) | 480 | 480 | 480 | 480 |
| 25% load | 96.0% | 98.7% | 98.3% | 95.9% |
| 50% load | 96.5% | 99.1% | 99.1% | 96.4% |
| 75% load | 96.3% | 99.3% | 99.3% | 96.1% |
| 100% load | 96.0% | 99.3% | 99.3% | 95.7% |

Derating Due to Load Power Factor


0.7 leading to 0.5 lagging without derating.

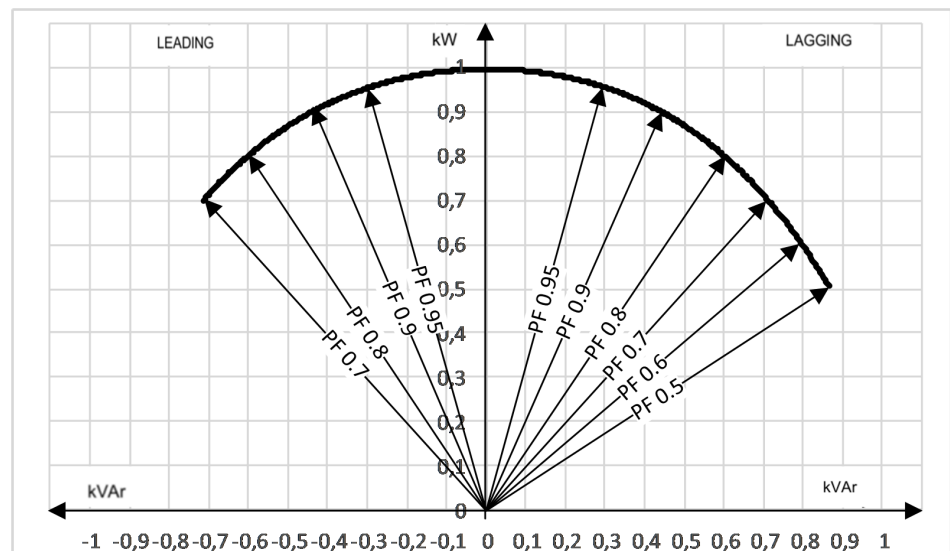


Batteries (VRLA)

End of Discharge Voltage

The voltage is 1.6 to 1.75 per cell depending on discharge ratio.

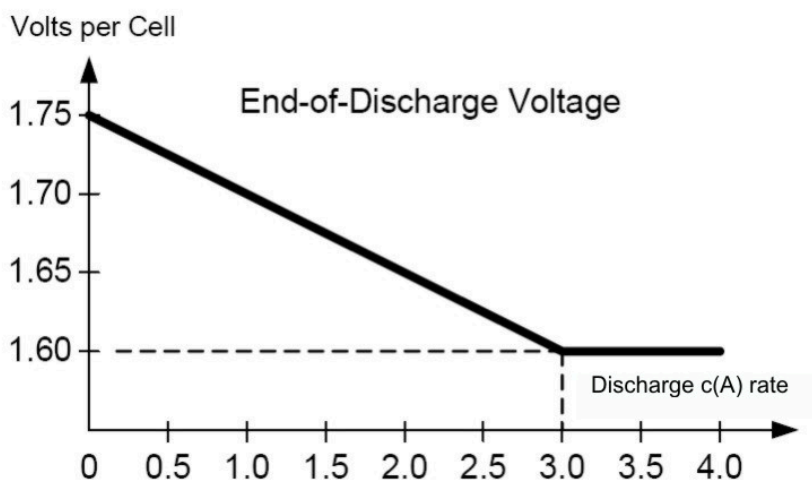

Battery Voltage Range (VRLA)

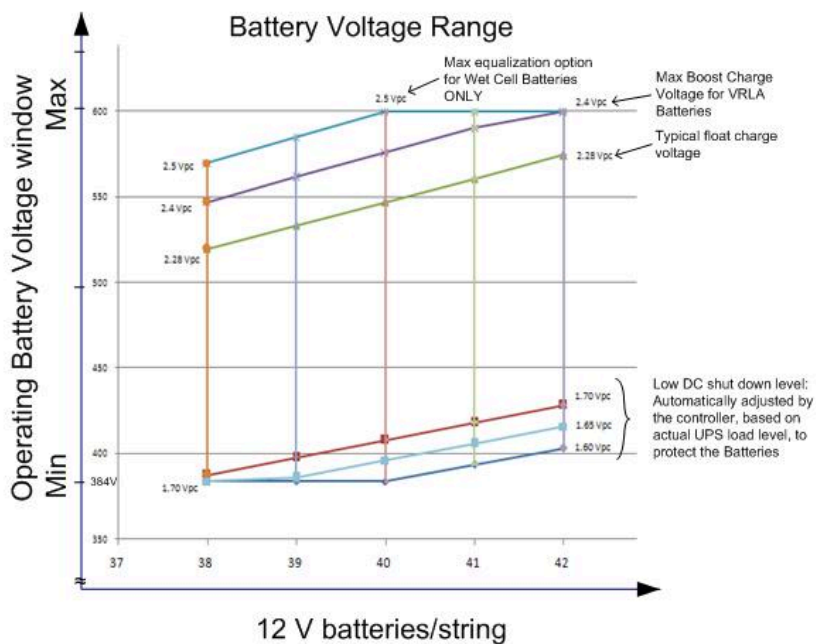


Compliance

| | |
|----------------------|--|
| Safety | UL 1778 5th edition |
| EMC/EMI/RFI | IEC 62040-2: 2016, 3rd edition Uninterruptible Power Systems (UPS) - Part 2: Electromagnetic compatibility (EMC) requirements C2 FCC 15B, class A |
| Performance | IEC 62040-3: 2011-03, 2nd edition Uninterruptible Power Systems (UPS) - Part 3: Method of specifying the performance and test requirements |
| Environmental | IEC 62040-4: 2013-04, 1st edition Uninterruptible Power Systems (UPS) - Part 4: Environmental aspects – Requirements and reporting |
| Markings | UL 1778 Listing and CSA C22.2 NO.107.3 |
| Transportation | ISTA 2B IEC 60721-4-2 Level 2M2 |
| Seismic | OSHPD, IBC2012 and CBC2013 to $S_{DS} = 1.83 g$ |
| Overvoltage category | III |
| Earthing system | TN, TT, IT |
| Protective class | I |
| Pollution degree | 2 |

Communication and Management

| | |
|---------------------------|--|
| Local Area Network | 100 Mbps |
| Extensions | Two optional Network Management Cards |
| MODBUS | MODBUS TCP/IP |
| Relay outputs | 6 configurable |
| Dry contact inputs | 5 configurable |
| Standard control panel | 7" touch-screen display |
| Audible alarm | Yes |
| Emergency Power Off (EPO) | Options: <ul style="list-style-type: none"> • Normally Open (NO) • Normally Closed (NC) • External 24 VDC SELV |
| External switchgear | Option containing: <ul style="list-style-type: none"> • Unit Input Breaker (UIB) • Unit Output Breaker (UOB) • Static Switch Input Breaker (SSIB) • Maintenance Bypass Breaker (MBB) • System Isolation Breaker (SIB) |
| External synchronization | Yes |
| Battery monitoring | Yes — string level breaker monitoring |

EPO Connections

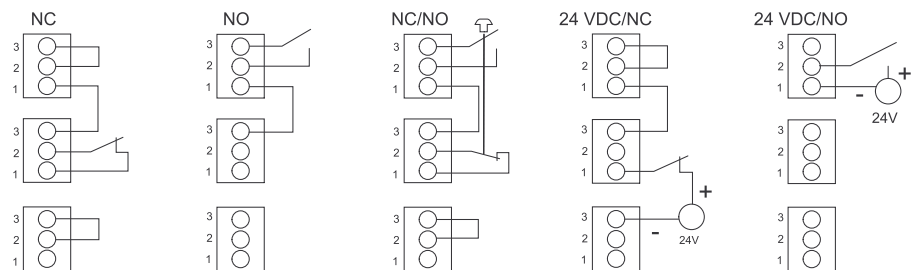

Overview of Input Contacts and Output Relays


Input Contacts

Do not connect any circuit to the input contacts unless it can be confirmed that the circuit is Class 2/SELV.

All circuits connected must have the same 0 V reference.

The input contacts support 24 VDC 10 mA.

The switch SW5500 on 0P6548 is used to select between internal SELV supply for inputs (standard setting) and external supply³. If external supply is selected, the supply must be connected to J5530.

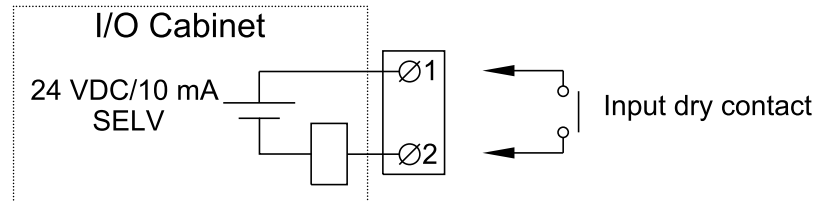


| Name | Description | Location |
|------------------|---------------------------------------|------------------------------------|
| IN 1 (Contact 1) | Configurable input contact | 0P6548 terminal J5502 ⁴ |
| IN 2 (Contact 2) | Configurable input contact | 0P6548 terminal J5503 ⁴ |
| IN 3 (Contact 3) | Configurable input contact | 0P6548 terminal J5504 ⁴ |
| IN 4 (Contact 4) | Configurable input contact | 0P6548 terminal J5505 ⁴ |
| IN 5 (Contact 5) | Configurable input contact | 0P6548 terminal J5510 ⁴ |
| IN 6 | UOB redundant AUX contact | 0P6548 terminal J5509 ⁴ |
| IN 7 | Transformer temperature switch | 0P6548 terminal J5508 ⁴ |
| IN 8 | External bonding contact | 0P6548 terminal J5507 ⁴ |
| IN 9 | Forced external synchronization input | 0P6548 terminal J5506 ⁴ |
| IN 10 | External synchronization requested | 0P6548 terminal J5511 ⁴ |
| IN 11 | Use static bypass standby | 0P6548 terminal J5512 ⁴ |
| IN 14 | MegaTie | 0P6552 terminal J9027 ⁴ |

Output Relays

NOTE: Maximum 250 VAC 5 A must be connected to the output relays.

All external circuitry must be fused with maximum 5 A fast acting fuses.

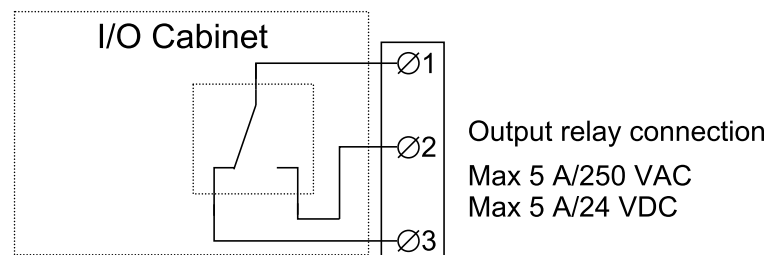

3. An external supply is useful in parallel systems where inputs are connected between different UPSs. This is to have a common reference and to avoid cross currents.
 4. Class 2/SELV wiring

| Name | Description | Location |
|------------------|---|------------------------------------|
| OUT 1 (Relay 1) | Configurable output relay | 0P6547 terminal J4939 |
| OUT 2 (Relay 2) | Configurable output relay | 0P6547 terminal J4940 |
| OUT 3 (Relay 3) | Configurable output relay | 0P6547 terminal J4941 |
| OUT 4 | Forced external synchronization output | 0P6548 terminal J5520 ⁵ |
| OUT 5 | MegaTie | 0P6548 terminal J5521 ⁵ |
| OUT 6 | External synchronization requested output | 0P6548 terminal J5522 ⁵ |
| OUT 7 | UPS in inverter ON | 0P6548 terminal J5523 ⁵ |
| OUT 8 (Relay 4) | Configurable output relay | 0P6548 terminal J5524 ⁵ |
| OUT 9 (Relay 5) | Configurable output relay | 0P6548 terminal J5525 ⁵ |
| OUT 10 (Relay 6) | Configurable output relay | 0P6548 terminal J5528 ⁵ |
| OUT 14 | Bonding contactor | 0P6552 terminal J9029 ⁵ |

NOTE: Refer to the operation manual for configuration options.

Facility Planning

Specifications for 500 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|---|
| Input | Connections | IEC: L1, L2, L3, PE ⁶ UL: L1, L2, L3 + G ⁷ | | | | |
| | Input voltage range (V) ⁸ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 816 | 775 | 746 | 699 | 646 |
| | Maximum input current (A) ⁹ | 921 | 885 | 852 | 798 | 757 |
| | Input current limitation (A) | 890 | | | 832 | 760 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ¹⁰ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ¹¹ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ± 0.1 , ± 3 , ± 10 . Default is ± 3 | | | | |
| | Nominal bypass current (A) | 813 | 773 | 745 | 703 | 642 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 1250 kW I/O: 9680 1500 kW I/O: 16245 | | | | 1250 kW I/O: 9165 1500 kW I/O: 16245 |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

6. TN, TT, and IT power distribution systems are supported.

7. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

8. The system can operate at 600 V for 1 minute.

9. At nominal input voltage and full charge.

10. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

11. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|-----|-----|-----|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ¹² or L1, L2, L3, N, G UL 1500 kW I/O ¹³ : L1, L2, L3, G, GEC ¹² | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ¹⁴ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 760 | 722 | 696 | 656 | 601 |
| | Minimum short circuit rating ¹⁵ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ¹⁶ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 60 at 100% load, 175 at $<80\%$ load | | | | 75 at 100% load, 200 at 80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 1090 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 1362 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per $^{\circ}\text{C}$ for $T \geq 25^{\circ}\text{C}$, 0 mV per $^{\circ}\text{C}$ for $T < 25^{\circ}\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

12. Per NEC 250.30.

13. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

14. 125% for 480 V.

15. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

16. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 625 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|--------------------|
| Input | Connections | IEC: L1, L2, L3, PE ¹⁷ UL: L1, L2, L3 + G ¹⁸ | | | | |
| | Input voltage range (V) ¹⁹ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 1021 | 969 | 932 | 870 | 807 |
| | Maximum input current (A) ²⁰ | 1151 | 1106 | 1065 | 994 | 946 |
| | Input current limitation (A) | 1113 | | | 1040 | 950 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ²¹ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ²² : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ±0.1, ±3, ±10. Default is ±3 | | | | |
| | Nominal bypass current (A) | 1017 | 966 | 931 | 878 | 802 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 9680 (1250 kW I/O) | | | | 9165 (1250 kW I/O) |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

17. TN, TT, and IT power distribution systems are supported.

18. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

19. The system can operate at 600 V for 1 minute.

20. At nominal input voltage and full charge.

21. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

22. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| Voltage (V) | | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|-----|-----|-----|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ²³ or L1, L2, L3, N, G UL 1500 kW I/O ²⁴ : L1, L2, L3, G, GEC ²³ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ²⁵ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 950 | 902 | 870 | 820 | 752 |
| | Minimum short circuit rating ²⁶ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ²⁷ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 75 at 100% load, 218.75 at $<80\%$ load | | | | 93.75 at 100% load, 250 at 80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 1362 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 1703 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per $^{\circ}\text{C}$ for $T \geq 25^{\circ}\text{C}$, 0 mV per $^{\circ}\text{C}$ for $T < 25^{\circ}\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

23. Per NEC 250.30.

24. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

25. 125% for 480 V.

26. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

27. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 750 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|---|
| Input | Connections | IEC: L1, L2, L3, PE ²⁸ UL: L1, L2, L3 + G ²⁹ | | | | |
| | Input voltage range (V) ³⁰ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 1225 | 1162 | 1119 | 1050 | 969 |
| | Maximum input current (A) ³¹ | 1381 | 1327 | 1278 | 1199 | 1136 |
| | Input current limitation (A) | 1335 | | | 1248 | 1140 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ³² UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ³³ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ±0.1, ±3, ±10. Default is ±3 | | | | |
| | Nominal bypass current (A) | 1220 | 1159 | 1117 | 1054 | 964 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 1250 kW I/O: 9680 1500 kW I/O: 16245 | | | | 1250 kW I/O: 9165 1500 kW I/O: 16245 |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

28. TN, TT, and IT power distribution systems are supported.

29. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

30. The system can operate at 600 V for 1 minute.

31. At nominal input voltage and full charge.

32. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

33. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|-----|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ³⁴ or L1, L2, L3, N, G UL 1500 kW I/O ³⁵ : L1, L2, L3, G, GEC ³⁴ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ³⁶ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 1140 | 1083 | 1043 | 984 | 902 |
| | Minimum short circuit rating ³⁷ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ³⁸ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 90 at 100% load, 262 at $<80\%$ load | | | | 112.5 at 100% load, 300 at 80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 1634 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 2043 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per $^{\circ}\text{C}$ for $T \geq 25^{\circ}\text{C}$, 0 mV per $^{\circ}\text{C}$ for $T < 25^{\circ}\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

34. Per NEC 250.30.

35. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

36. 125% for 480 V.

37. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

38. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 800 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|--------------------|
| Input | Connections | IEC: L1, L2, L3, PE ³⁹ UL: L1, L2, L3 + G ⁴⁰ | | | | |
| | Input voltage range (V) ⁴¹ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 1307 | 1239 | 1193 | 1120 | 1033 |
| | Maximum input current (A) ⁴² | 1474 | 1415 | 1363 | 1279 | 1212 |
| | Input current limitation (A) | 1424 | | | 1331 | 1216 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ⁴³ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ⁴⁴ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ± 0.1 , ± 3 , ± 10 . Default is ± 3 | | | | |
| | Nominal bypass current (A) | 1302 | 1236 | 1191 | 1124 | 1027 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 9680 (1250 kW I/O) | | | | 9165 (1250 kW I/O) |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

39. TN, TT, and IT power distribution systems are supported.

40. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

41. The system can operate at 600 V for 1 minute.

42. At nominal input voltage and full charge.

43. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

44. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|------|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ⁴⁵ or L1, L2, L3, N, G UL 1500 kW I/O ⁴⁶ : L1, L2, L3, G, GEC ⁴⁵ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ⁴⁷ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 1216 | 1155 | 1113 | 1050 | 962 |
| | Minimum short circuit rating ⁴⁸ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ⁴⁹ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 96 at 100% load, 280 at $<80\%$ load | | | | 120 at 100% load, 320 at 80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 1743 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 2179 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per $^{\circ}\text{C}$ for $T \geq 25^{\circ}\text{C}$, 0 mV per $^{\circ}\text{C}$ for $T < 25^{\circ}\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

45. Per NEC 250.30.

46. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

47. 125% for 480 V.

48. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

49. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 1000 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|---|
| Input | Connections | IEC: L1, L2, L3, PE ⁵⁰ UL: L1, L2, L3 + G ⁵¹ | | | | |
| | Input voltage range (V) ⁵² | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 1633 | 1549 | 1492 | 1397 | 1291 |
| | Maximum input current (A) ⁵³ | 1842 | 1770 | 1704 | 1595 | 1514 |
| | Input current limitation (A) | 1780 | | | 1664 | 1520 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ⁵⁴ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ⁵⁵ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ± 0.1 , ± 3 , ± 10 . Default is ± 3 | | | | |
| | Nominal bypass current (A) | 1627 | 1545 | 1489 | 1405 | 1284 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 1250 kW I/O: 9680 1500 kW I/O: 16245 | | | | 1250 kW I/O: 9165 1500 kW I/O: 16245 |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

50. TN, TT, and IT power distribution systems are supported.

51. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

52. The system can operate at 600 V for 1 minute.

53. At nominal input voltage and full charge.

54. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

55. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|------|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ⁵⁶ or L1, L2, L3, N, G UL 1500 kW I/O ⁵⁷ : L1, L2, L3, G, GEC ⁵⁶ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ⁵⁸ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 1519 | 1443 | 1391 | 1312 | 1203 |
| | Minimum short circuit rating ⁵⁹ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ⁶⁰ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 120 at 100% load, 350 at <80% load | | | | 150 at 100% load, 400 at <80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 2179 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 2724 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per °C for $T \geq 25^\circ\text{C}$, 0 mV per °C for $T < 25^\circ\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

56. Per NEC 250.30.

57. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

58. 125% for 480 V.

59. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

60. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 1100 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|--------------------|
| Input | Connections | IEC: L1, L2, L3, PE ⁶¹ UL: L1, L2, L3 + G ⁶² | | | | |
| | Input voltage range (V) ⁶³ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 1796 | 1704 | 1641 | 1540 | 1421 |
| | Maximum input current (A) ⁶⁴ | 2026 | 1947 | 1874 | 1759 | 1666 |
| | Input current limitation (A) | 1958 | | | 1830 | 1672 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ⁶⁵ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ⁶⁶ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ±0.1, ±3, ±10. Default is ±3 | | | | |
| | Nominal bypass current (A) | 1789 | 1700 | 1639 | 1545 | 1412 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 9680 (1250 kW I/O) | | | | 9165 (1250 kW I/O) |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

61. TN, TT, and IT power distribution systems are supported.

62. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

63. The system can operate at 600 V for 1 minute.

64. At nominal input voltage and full charge.

65. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

66. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|------|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ⁶⁷ or L1, L2, L3, N, G UL 1500 kW I/O ⁶⁸ : L1, L2, L3, G, GEC ⁶⁷ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ⁶⁹ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 1671 | 1588 | 1530 | 1443 | 1323 |
| | Minimum short circuit rating ⁷⁰ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ⁷¹ | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 132 at 100% load, 385 at <80% load | | | | 165 at 100% load, 440 at <80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 2397 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 2996 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | Unlimited | | | | |
| | Temperature compensation (per cell) | -3.3 mV per °C for $T \geq 25^\circ\text{C}$, 0 mV per °C for $T < 25^\circ\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

67. Per NEC 250.30.

68. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

69. 125% for 480 V.

70. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

71. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 1250 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|---|
| Input | Connections | IEC: L1, L2, L3, PE ⁷² UL: L1, L2, L3 + G ⁷³ | | | | |
| | Input voltage range (V) ⁷⁴ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 2041 | 1937 | 1865 | 1750 | 1615 |
| | Maximum input current (A) ⁷⁵ | 2303 | 2212 | 2130 | 1999 | 1893 |
| | Input current limitation (A) | 2225 | | | 2080 | 1900 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ⁷⁶ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ⁷⁷ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ±0.1, ±3, ±10. Default is ±3 | | | | |
| | Nominal bypass current (A) | 2033 | 1931 | 1862 | 1756 | 1605 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA I _{cw} 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 1250 kW I/O: 9680 1500 kW I/O: 16245 | | | | 1250 kW I/O: 9165 1500 kW I/O: 16245 |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

72. TN, TT, and IT power distribution systems are supported.

73. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

74. The system can operate at 600 V for 1 minute.

75. At nominal input voltage and full charge.

76. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

77. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|------|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ⁷⁸ or L1, L2, L3, N, G UL 1500 kW I/O ⁷⁹ : L1, L2, L3, G, GEC ⁷⁸ | | | | |
| | Overload capacity | Normal operation: 150% for 1 minute, 125% for 10 minutes Battery operation: 128% for 10 seconds, 115% for 1 minute Bypass operation: 110% ⁸⁰ continuous, 1000% for 60 milliseconds for systems with 1250 kW I/O cabinet, and 1000% for 100 milliseconds for systems with 1500 kW I/O cabinet | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 1899 | 1804 | 1739 | 1640 | 1504 |
| | Minimum short circuit rating ⁸¹ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ⁸² | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 150 at 100% load, 437 at <80% load | | | | 187.5 at 100% load, 500 at <80% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 2724 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 3405 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | 1 hour | | | | |
| | Temperature compensation (per cell) | -3.3 mV per °C for $T \geq 25^\circ\text{C}$, 0 mV per °C for $T < 25^\circ\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

78. Per NEC 250.30.

79. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

80. 125% for 480 V.

81. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

82. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Specifications for 1500 kW UPS

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|--------|---|---|---------|---------|---------|---------|
| Input | Connections | IEC: L1, L2, L3, PE ⁸³ UL: L1, L2, L3 + G ⁸⁴ | | | | |
| | Input voltage range (V) ⁸⁵ | 340-456 | 340-480 | 353-498 | 374-528 | 408-576 |
| | Frequency (Hz) | 40-70 | | | | |
| | Nominal input current (A) | 2449 | 2325 | 2238 | 2100 | 1937 |
| | Maximum input current (A) ⁸⁶ | 2763 | 2654 | 2555 | 2398 | 2271 |
| | Input current limitation (A) | 2670 | | | 2496 | 2280 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 100 kA RMS | | | | |
| | Total harmonic distortion (THDI) | <3% at 100% load, <4% at 50% load, <9% at 25% load | | | | |
| | Input power factor | 0.99 at >40% load, 0.98 at >20% load, 0.97 at >10% load | | | | |
| | Protection | Contactors | | | | |
| | Ramp-in | Adaptive 1-300 seconds | | | | |
| Bypass | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE ⁸⁷ UL 1250 kW I/O: L1, L2, L3, G or L1, L2, L3, N, G UL 1500 kW I/O ⁸⁸ : L1, L2, L3, G | | | | |
| | Bypass voltage range (V) | 342-418 | 360-440 | 374-457 | 396-484 | 432-528 |
| | Frequency (Hz) | 50 or 60 | | | | |
| | Frequency range (Hz) | Programmable: ± 0.1 , ± 3 , ± 10 . Default is ± 3 | | | | |
| | Nominal bypass current (A) | 2440 | 2318 | 2234 | 2107 | 1926 |
| | Minimum short circuit rating | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating | 1250 kW I/O: 100 kA Icw 1500 kW I/O: 100 kA RMS (conditioned by an internal molded switch with 90 kA peak magnetic trip) | | | | |
| | Thyristor I ² t (kA*s ²) | 16245 (1500 kW I/O) | | | | |
| | BF2 magnetic trip | 1250 kW I/O: 39 kA 1500 kW I/O: 39 kA | | | | |
| | Protection | 1250 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection 1250 kW I/O with GVXOPT001 installed: Molded switch with trip for backfeed protection 1500 kW I/O with preinstalled backfeed breaker BF2: Molded switch with trip for backfeed protection | | | | |

83. TN, TT, and IT power distribution systems are supported.

84. WYE source – solid grounded and high resistance grounded sources are supported. Corner (line) grounding is not permitted.

85. The system can operate at 600 V for 1 minute.

86. At nominal input voltage and full charge.

87. TN, TT, and IT power distribution systems with no earthed line conductors are supported.

88. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

| | Voltage (V) | 380 | 400 | 415 | 440 | 480 |
|----------------|---|---|------|------|------|---|
| Output | Connections | IEC 1250 kW I/O and 1500 kW I/O: L1, L2, L3, N, PE or L1, L2, L3, PE UL 1250 kW I/O: L1, L2, L3, G, GEC ⁸⁹ or L1, L2, L3, N, G UL 1500 kW I/O ⁹⁰ : L1, L2, L3, G, GEC ⁸⁹ | | | | |
| | Overload capacity | 150% for 1 minute, 125% for 10 minutes (normal operation) 115% for 1 minute (battery operation) 110% continuous, 1000% for 100 milliseconds (bypass operation) | | | | |
| | Output voltage tolerance | Balanced load: $\pm 1\%$, Unbalanced load: $\pm 3\%$ | | | | |
| | Dynamic load response | $\pm 5\%$ after 2 ms, $\pm 1\%$ after 50 ms | | | | |
| | Output power factor | 1 | | | | |
| | Nominal output current (A) | 2279 | 2165 | 2087 | 1968 | 1804 |
| | Minimum short circuit rating ⁹¹ | Dependent on upstream protection. See section for ' Recommended upstream protection and cable sizes – IEC ' for details. | | | | |
| | Maximum short circuit rating ⁹² | 100 kA RMS | | | | |
| | Inverter output short circuit capabilities | Varies with time. See graph and table values in Inverter Short-Circuit Capabilities (Bypass not Available), page 18. | | | | |
| | Total harmonic distortion (THDU) | <2% at 100% linear load, <3% at 100% non-linear load | | | | |
| | Output frequency (Hz) | 50/60 (synchronized to bypass), 50/60 Hz $\pm 0.1\%$ (free-running) | | | | |
| | Slew rate (Hz/sec) | Programmable: 0.25, 0.5, 1, 2, 4, 6 | | | | |
| | Output performance classification (according to IEC/ EN62040-3) | Double-conversion: VFI-SS-111 | | | | |
| | Load crest factor | Up to 3 (THDU < 5%) | | | | |
| | Load power factor | 0.7 leading to 0.5 lagging without derating | | | | |
| Battery (VRLA) | Charging power in % of output power | 35% at $\leq 80\%$ load, 12% at 100% load | | | | 40% at $\leq 80\%$ load, 15% at 100% load |
| | Maximum charging power (kW) | 525 at < 80% load, 180 at 100% load, | | | | 600 at <80% load, 225 at 100% load |
| | Nominal battery voltage (VDC) | 480 | | | | |
| | Nominal float voltage (VDC) | 546 | | | | |
| | End of discharge voltage (full load) (VDC) | 384 | | | | |
| | End of discharge voltage (no load) (VDC) | 420 | | | | |
| | Battery current at full load and nominal battery voltage (A) | 3269 | | | | |
| | Battery current at full load and minimum battery voltage (A) | 4086 | | | | |
| | Maximum short circuit rating | 50 kA | | | | |
| | Maximum battery backup time | 1 hour | | | | |
| | Temperature compensation (per cell) | -3.3 mV per °C for $T \geq 25^\circ\text{C}$, 0 mV per °C for $T < 25^\circ\text{C}$ | | | | |
| | Ripple current | < 5% C20 (5-minute backup time) | | | | |
| | Battery test | Manual/automatic (selectable) | | | | |
| | Deep discharge protection | Yes | | | | |
| | Recharge according to battery temperature | Yes | | | | |

89. Per NEC 250.30.

90. 4-wire connection with neutral is not compliant per FCC regulations for the 1500 kW I/O cabinet.

91. Minimum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

92. Maximum short circuit rating for output takes backfeeding energy through the bypass of parallel UPSs into consideration.

Recommended Upstream Protection and Cable Sizes – UL

⚠ CAUTION

HAZARD OF FIRE

- Connect only to a circuit with the below specifications.
- Connect only to a circuit provided with a maximum branch circuit overcurrent protection, as specified in the UPS rating tables below, in accordance with the National Electrical Code, ANSI/NFPA70, and the Canadian Electrical Code, Part I, C22.1.

Failure to follow these instructions can result in injury or equipment damage.

NOTE: Overcurrent protection is to be provided by others.

NOTE: All wiring must comply with all applicable national and/or electrical code (National Electrical Code, ANSI/NFPA 70).

Cable sizes in this manual are based on Table 310.15 of the National Electrical Code 2014 (NEC) with the following assertions:

- 90 °C conductors (THHN) for 75 °C termination
- Not more than 3 current carrying conductors in each conduit
- An ambient temperature of max. 30 °C
- Use of copper or aluminium conductors
- 100% rated breakers
- Nominal operating conditions

If the ambient room temperature is greater than 30 °C, use larger or additional parallel conductors in accordance with the correction factors of the NEC. The maximum allowable conductor size is 600 kcmil.

Equipment Grounding Conductors (EGC) are sized in accordance with NEC Article 250.122 and Table 250.122 Minimum size equipment conductor for grounding equipment.

NOTE: Always consider the EGC size according to the complete electrical installation.

NOTE: The use of aluminium conductors can limit the number of parallel Lithium-ion battery cabinets. Contact Schneider Electric for more information.

NOTICE

RISK OF EQUIPMENT DAMAGE

To ensure correct load sharing in bypass operation in a parallel system, the following recommendations apply:

- The bypass cables must be of the same length for all UPSs.
- The output cables must be of the same length for all UPSs.
- The input cables must be of the same length for all UPSs in a single mains system.
- Cable formation recommendations must be followed.
- The reactance of busbar layout in the bypass/input and output switchgear must be the same for all UPSs.

If the above recommendations are not followed the result can be uneven load sharing in bypass and overload of individual UPSs.

Failure to follow these instructions can result in equipment damage.

Recommended Upstream Protection and Cable Sizes for 500 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹³ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 800 ($I_r = 1.0$) | 2x500 / 3x400 | 1x1/0 / 1x3/0 |
| Bypass | 700 ($I_r = 1.0$) | 2x350 / 2x500 | 1x1/0 / 1x3/0 |
| Output | 700 ($I_r = 1.0$) | 2x350 / 2x500 | 1x1/0 / 1x3/0 |
| Battery | 1600 ($I_r = 0.9$) | 4x500 / 5x500 | 1x4/0 / 1x350 |

Recommended Upstream Protection and Cable Sizes for 625 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹³ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 1000 ($I_r = 1.0$) | 3x400 / 3x600 | 1x2/0 / 1x4/0 |
| Bypass | 800 ($I_r = 1.0$) | 2x600 / 3x400 | 1x1/0 / 1x3/0 |
| Output | 800 ($I_r = 1.0$) | 2x600 / 3x400 | 1x1/0 / 1x3/0 |
| Battery | 2000 ($I_r = 0.9$) | 5x500 / 6x500 | 1x250 / 1x400 |

Recommended Upstream Protection and Cable Sizes for 750 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹³ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 1200 ($I_r = 1.0$) | 3x600 / 4x500 | 1x3/0 / 1x250 |
| Bypass | 1000 ($I_r = 1.0$) | 3x400 / 3x600 | 1x2/0 / 1x4/0 |
| Output | 1000 ($I_r = 1.0$) | 3x400 / 3x600 | 1x2/0 / 1x4/0 |
| Battery | 2500 ($I_r = 0.9$) | 6x500 / 7x600 | 1x350 / 1x600 |

Recommended Upstream Protection and Cable Sizes for 800 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹³ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 1600 ($I_r = 0.8$) | 4x400 / 4x600 | 1x4/0 / 1x350 |
| Bypass | 1000 | 3x400 / 3x600 | 1x2/0 / 1x4/0 |
| Output | 1000 | 3x400 / 3x600 | 1x2/0 / 1x4/0 |
| Battery | 2500 ($I_r = 0.9$) | 6x500 / 7x600 | 1x350 / 1x600 |

93. If the conductors are run in conduits, there must be one conductor in each conduit.

Recommended Upstream Protection and Cable Sizes for 1000 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹⁴ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 1600 ($I_r = 1.0$) | 4x600 / 5x600 | 1x4/0 / 1x350 |
| Bypass | 1600 ($I_r = 0.8$) | 4x400 / 4x600 | 1x4/0 / 1x350 |
| Output | 1600 ($I_r = 0.8$) | 4x400 / 4x600 | 1x4/0 / 1x350 |
| Battery | 3000 ($I_r = 1.0$) | 8x500 / 9x600 | 1x400 / 1x600 |

Recommended Upstream Protection and Cable Sizes for 1100 kW UPS

NOTE: For a 1250 I/O cabinet, it is preferred to use flexible copper power cables with as small a diameter as possible. The number of power cables needed for this kW rating will make large and inflexible power cables more difficult to install.

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹⁴ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 2000 ($I_r = 0.9$) | 5x500 / 6x500 | 1x250 / 1x400 |
| Bypass | 1600 ($I_r = 0.9$) | 4x500 / 5x500 | 1x4/0 / 1x350 |
| Output | 1600 ($I_r = 0.9$) | 4x500 / 5x500 | 1x4/0 / 1x350 |
| Battery | 3000 ($I_r = 1.0$) | 8x500 / 9x600 | 1x400 / 1x600 |

Recommended Upstream Protection and Cable Sizes for 1250 kW UPS

NOTE: For a 1250 I/O cabinet, it is preferred to use flexible copper power cables with as small a diameter as possible. The number of power cables needed for this kW rating will make large and inflexible power cables more difficult to install.

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹⁴ Copper / Aluminum |
|---------|----------------------|---|---|
| Input | 2000 ($I_r = 1.0$) | 5x600 / 6x600 | 1x250 / 1x400 |
| Bypass | 1600 ($I_r = 1.0$) | 4x600 / 5x600 | 1x4/0 / 1x350 |
| Output | 1600 ($I_r = 1.0$) | 4x600 / 5x600 | 1x4/0 / 1x350 |
| Battery | 4000 ($I_r = 0.9$) | 9x600 / 11x600 | 2x250 / 2x400 |

94. If the conductors are run in conduits, there must be one conductor in each conduit.

Recommended Upstream Protection and Cable Sizes for 1500 kW UPS

| | Maximum OCPD (A) | Cable size per phase (AWG/kcmil) Copper / Aluminum | EGC cable size (AWG/kcmil) ⁹⁵ Copper / Aluminum |
|---------|--------------------|---|---|
| Input | 2500 ⁹⁶ | 6x600/ 8x600 | 1x350 / 1x400 |
| Bypass | 2000 ⁹⁶ | 5x600/ 6x600 | 1x250 / 1x350 |
| Output | 2000 ⁹⁶ | 5x600/ 6x600 | 1x250 / 1x350 |
| Battery | 5000 ⁹⁷ | 11x600/ 14x600 | 1x700 kcmil/ – |

Recommended Bolt and Lug Sizes for Copper Cables

| Cable Size | Terminal Bolt Diameter | Cable Lug Type | Crimping Tool | Die |
|------------|------------------------|----------------|------------------|-----------------------|
| 1/0 AWG | M12 x 35 mm | LCCF1/0–12–X | CT930 | CD-920–2/0 Black P45 |
| 2/0 AWG | M12 x 35 mm | LCCF2/0–12–X | CT930 | CD-920–3/0 Orange P50 |
| 3/0 AWG | M12 x 35 mm | LCCF3/0–12–X | CT930 | CD-920–4/0 Purple P54 |
| 250 kcmil | M12 x 35 mm | LCCF250–12–X | CT-940CH/CT-2940 | CD-920–300 White P66 |
| 300 kcmil | M12 x 35 mm | LCCF300–12–6 | CT-940CH/CT-2940 | CD-920–350 Red P71 |
| 400 kcmil | M12 x 35 mm | LCCF400–12–6 | CT-940CH/CT-2940 | CD-920–500 Brown P87 |
| 500 kcmil | M12 x 35 mm | LCCF500–12–6 | CT-940CH/CT-2940 | CD-920–500A Pink P99 |
| 600 kcmil | M12 x 40 mm | LCCF600–12–6 | CT-940CH/CT-2940 | CD-920–750 Black P106 |

Recommended Bolt and Lug Sizes for Aluminium Cables

| Cable Size | Terminal Bolt Diameter | Cable Lug Type | Crimping Tool | Die |
|------------|------------------------|----------------|---------------|------------|
| 2/0 AWG | M12 x 40 mm | LAB2/0-12-5 | CT930 | Olive P54 |
| 3/0 AWG | M12 x 40 mm | LAB3/0-12-5 | CT930 | Ruby P60 |
| 250 kcmil | M12 x 40 mm | LAB250-12-5 | CT930 | Red P71 |
| 300 kcmil | M12 x 40 mm | LAB300-12-2 | CT930 | Blue P76 |
| 400 kcmil | M12 x 40 mm | LAB400-12-2 | CT930 | Green P94 |
| 500 kcmil | M12 x 40 mm | LAB500-12-2 | CT930 | Pink P99 |
| 600 kcmil | M12 x 40 mm | LAB600-12-2 | CT930 | Black P106 |

95. If the conductors are run in conduits, there must be one conductor in each conduit.

96. Long-time setting (I_t) = 1.0

97. Long-time setting (I_t) = 0.9

Weights and Dimensions

UPS Shipping Weights and Dimensions

| | Weight kg (lbs) | Height mm (in) | Width mm (in) | Depth mm (in) |
|--|-----------------|----------------|---------------|---------------|
| 1250 kW I/O cabinet (GVXI1250KDNBF2 or GVXI1250KD) | 800 (1764) | 2140 (84.3) | 1400 (55.1) | 1060 (41.8) |
| 1500 kW I/O cabinet (GVXI1500KD) | 1060 (2337) | 2140 (84.3) | 2120 (83.5) | 1060 (41.8) |
| Galaxy VX 250 kW power cabinet (GVXP250KD) | 560 (1235) | 2140 (84.3) | 760 (29.9) | 1060 (41.8) |

NOTE: The Galaxy VX UPS consist of one 1250 kW I/O cabinet or one 1500 kW I/O cabinet and a minimum of two 250 kW power cabinets depending on your chosen configuration.

Weights and Dimensions for UPSs with 1250 kW I/O Cabinet

| Commercial reference | | Weight kg (lbs) | Height mm (in) | Width mm (in) | Depth mm (in) |
|---|--|---|----------------|---|---------------|
| <ul style="list-style-type: none"> GVX500K500NGS GVX500K750NGS GVX500K1000NGS GVX500K1250NGS | Total – Power cabinets – I/O cabinet | 1700 (3748) 2 x 540 (2 x 1190) 620 (1367) | 1970 (77.6) | 2400 (94.5) 2 x 600 (2 x 23.6) 1200 (47.2) | 900 (35.4) |
| <ul style="list-style-type: none"> GVX625K625NGS GVX625K1000NGS GVX750K500NGS GVX750K750NGS GVX750K1000NGS GVX750K1250NGS | Total – Power cabinets – I/O cabinet | 2240 (4938) 3 x 540 (3 x 1190) 620 (1367) | 1970 (77.6) | 3000 (118.1) 3 x 600 (3 x 23.6) 1200 (47.2) | 900 (35.4) |
| <ul style="list-style-type: none"> GVX800K800NGS GVX1000K750NGS GVX1000K1000NGS GVX1000K1250NGS | Total – Power cabinets – I/O cabinet | 2780 (6129) 4 x 540 (4 x 1190) 620 (1367) | 1970 (77.6) | 3600 (141.7) 4 x 600 (4 x 23.6) 1200 (47.2) | 900 (35.4) |
| <ul style="list-style-type: none"> GVX1100K1100NGS GVX1250K1000NGS GVX1250K1250NGS | Total – Power cabinets – I/O cabinet | 3320 (7319) 5 x 540 (5 x 1190) 620 (1367) | 1970 (77.6) | 4200 (165.4) 5 x 600 (5 x 23.6) 1200 (47.2) | 900 (35.4) |
| <ul style="list-style-type: none"> GVX1500K1100NGS GVX1500K1250NGS | Total – Power cabinets – I/O cabinet | 3860 (8510) 6 x 540 (6 x 1190) 620 (1367) | 1970 (77.6) | 4800 (189.0) 6 x 600 (6 x 23.6) 1200 (47.2) | 900 (35.4) |

Weights and Dimensions for UPSs with 1500 kW I/O Cabinet


| Commercial reference | | Weight kg (lbs) | Height mm (in) | Width mm (in) | Depth mm (in) |
|----------------------|--|--|----------------|---|---------------|
| • GVX500K1500GS | Total – Power cabinets – I/O cabinet | 1956 (4312) 2 x 540 (2 x 1190) 876 (1931) | 1970 (77.6) | 3200 (126.0) 2 x 600 (2 x 23.6) 2000 (78.7) | 900 (35.4) |
| • GVX750K1500GS | Total – Power cabinets – I/O cabinet | 2496 (5503) 3 x 540 (3 x 1190) 876 (1931) | 1970 (77.6) | 3800 (149.6) 3 x 600 (3 x 23.6) 2000 (78.7) | 900 (35.4) |
| • GVX1000K1500GS | Total – Power cabinets – I/O cabinet | 3036 (6693) 4 x 540 (4 x 1190) 876 (1931) | 1970 (77.6) | 4400 (173.2) 4 x 600 (4 x 23.6) 2000 (78.7) | 900 (35.4) |
| • GVX1250K1500GS | Total – Power cabinets – I/O cabinet | 3576 (7884) 5 x 540 (5 x 1190) 876 (1931) | 1970 (77.6) | 5000 (196.9) 5 x 600 (5 x 23.6) 2000 (78.7) | 900 (35.4) |
| • GVX1500K1500GS | Total – Power cabinets – I/O cabinet | 4116 (9074) 6 x 540 (6 x 1190) 876 (1931) | 1970 (77.6) | 5600 (220.5) 6 x 600 (6 x 23.6) 2000 (78.7) | 900 (35.4) |
| • GVX1750K1500GS | Total – Power cabinets – I/O cabinet | 4656 (10265) 7 x 540 (7 x 1190) 876 (1931) | 1970 (77.6) | 6200 (244.1) 7 x 600 (7 x 23.6) 2000 (78.7) | 900 (35.4) |

Clearance

Clearance for UPSs with 1250 kW I/O Cabinet

NOTE: Clearance dimensions are published for airflow and service access only. Consult with the local safety codes and standards for additional requirements in your local area.

NOTE: The UPS system can be placed up against a wall and there is no requirement for rear or side access.

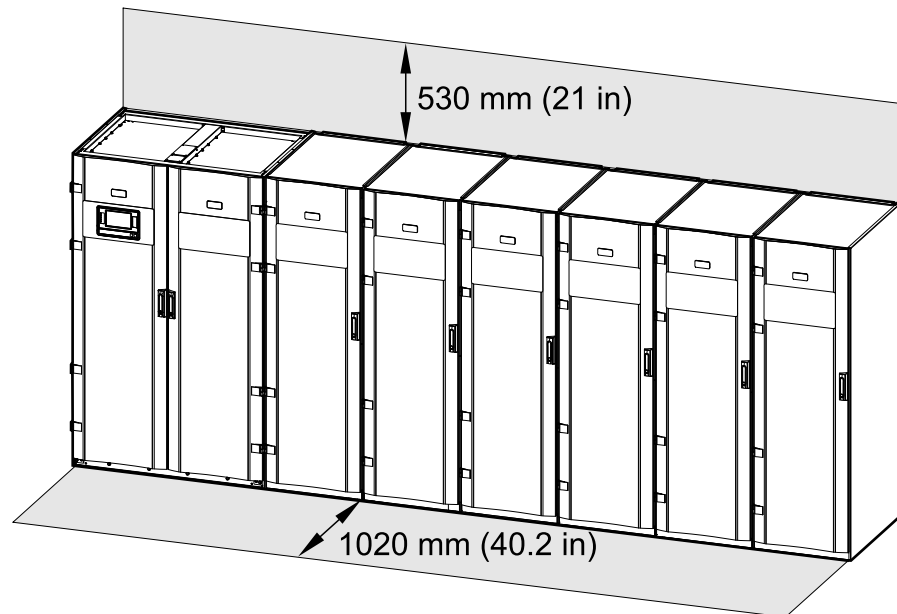


Clearance for UPSs with 1500 kW I/O Cabinet

NOTE: Clearance dimensions are published for airflow and service access only. Consult with the local safety codes and standards for additional requirements in your local area.

NOTE: The UPS system can be placed up against a wall with no requirement for rear or side access.

Front View




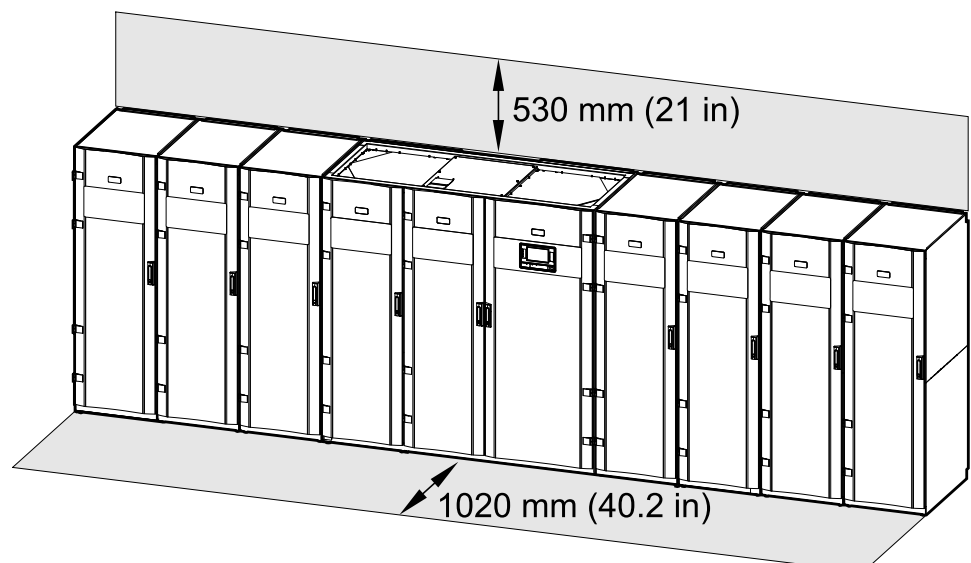


Guidance for Organizing Battery Cables

NOTE: For 3rd party batteries, use only high rate batteries for UPS applications.

NOTE: When the battery bank is placed remotely, the organizing of the cables is important to reduce voltage drop and inductance. The distance between the battery bank and the UPS must not exceed 200 m (656 ft). Contact Schneider Electric for installations with a longer distance.

NOTE: To minimize the risk of electromagnetic radiation, it is highly recommended to follow the below guidance and to use grounded metallic tray supports.
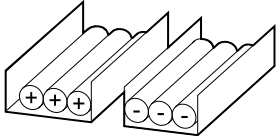
| Cable Length |  |  |  |  |
|--------------|---|---|--|---|
| <30 m | Not recommended | Acceptable | Recommended | Recommended |
| 31–75 m | Not recommended | Not recommended | Acceptable | Recommended |
| 76–150 m | Not recommended | Not recommended | Acceptable | Recommended |
| 151–200 m | Not recommended | Not recommended | Not recommended | Recommended |

Torque Specifications

**WARNING**

HAZARD OF ELECTRIC SHOCK
All electrical connections must be torqued according to this table.
Failure to follow these instructions can result in death, serious injury, or equipment damage.

| Bolt size | Torque |
|-----------|-----------------------|
| M6 | 5 Nm (3.69 lb-ft) |
| M8 | 17.5 Nm (12.91 lb-ft) |
| M10 | 30 Nm (22 lb-ft) |
| M12 | 50 Nm (36.87 lb-ft) |

Environment

| | Operating | Storage |
|--|--|---|
| Temperature | 0 °C to 40 °C (32 °F to 104 °F) 0 °C to 50 °C (32 °F to 122 °F) when derated to 75% power ⁹⁸ | -15 °C to 40 °C (5 °F to 104 °F) for systems with batteries -25 °C to 55 °C (-13 °F to 131 °F) for systems without batteries |
| Relative humidity | 5-95% non-condensing | 10-80% non-condensing |
| Elevation derating according to ANSI C57.96–1999 ⁹⁹ | 1000 m (3300 ft): 1.000 1500 m (5000 ft): 0.975 2000 m (6600 ft): 0.950 2500 m (8300 ft): 0.925 3000 m (10000 ft): 0.900 | 0-15000 m (0-50000 ft) |
| Audible noise one meter (three feet) from unit | 62 dB at 70% load 69.5 dB at 100% load for 400 V systems 68 dB at 100% load for 480 V systems | |
| Protection class | IP20 | |
| Color | RAL 9003 white | |

98. For temperatures between 40 °C (104 °F) and 50 °C (122 °F), the load power rating must be derated with 2.5% per °C of rated output power. Above 40 °C (104 °F) the minimum input voltage is 340 V, and from 380 V to 340 V, the charge power must be linearly derated from 12% to 1%.

99. Maximum operation elevation is 3000 m (10000 ft).

Heat Dissipation (BTU/hr) for UPSs with 1250 kW I/O Cabinet

Heat Dissipation for 500 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|-------|-------|-------|-------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 17771 | 21504 | 21504 | 21504 | 22920 | 11385 | 16847 | 16387 | 14099 | 11835 |
| 50% load | 34617 | 38327 | 38327 | 37397 | 36468 | 8616 | 11235 | 10360 | 12112 | 13870 |
| 75% load | 56095 | 58889 | 58889 | 56095 | 53313 | 12924 | 15540 | 15540 | 15540 | 15540 |
| 100% load | 78519 | 80387 | 78519 | 75723 | 72936 | 13758 | 17232 | 17232 | 17232 | 17232 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 4308 | 7376 | 6935 | 10264 | 13644 | 14555 | 15469 | 15011 | 15011 | 15011 |
| 50% load | 13870 | 12990 | 16521 | 16078 | 15635 | 29110 | 29110 | 30938 | 30938 | 29110 |
| 75% load | 12924 | 14231 | 14231 | 15540 | 16853 | 75903 | 47782 | 49160 | 49160 | 49160 |
| 100% load | 17232 | 13758 | 13758 | 16362 | 18975 | 71083 | 74793 | 80387 | 80387 | 72936 |

Heat Dissipation for 625 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|-------|-------|-------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 27469 | 26880 | 26880 | 26880 | 28059 | 10880 | 13110 | 13670 | 13670 | 13670 |
| 50% load | 47909 | 47909 | 47909 | 45006 | 42118 | 11859 | 14044 | 15139 | 15139 | 15139 |
| 75% load | 73611 | 73611 | 73611 | 67509 | 61451 | 16155 | 19426 | 19426 | 19426 | 19426 |
| 100% load | 114602 | 100484 | 98149 | 91170 | 84236 | 23718 | 25901 | 25901 | 23718 | 21540 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|-------|--------|--------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 15922 | 15922 | 10880 | 13390 | 15922 | 17056 | 17056 | 18764 | 18764 | 18764 |
| 50% load | 17337 | 17337 | 17337 | 17337 | 17337 | 40967 | 39818 | 38672 | 38672 | 36387 |
| 75% load | 21066 | 21066 | 21066 | 21066 | 21066 | 61451 | 61451 | 61451 | 61451 | 61451 |
| 100% load | 25901 | 25901 | 25901 | 24809 | 23718 | 86543 | 84236 | 100484 | 100484 | 91170 |

Heat Dissipation for 750 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 28745 | 30847 | 30847 | 30847 | 30847 | 10402 | 13056 | 13723 | 13723 | 13723 |
| 50% load | 56095 | 56095 | 54702 | 53313 | 51926 | 14231 | 16853 | 18167 | 18167 | 18167 |
| 75% load | 94653 | 92542 | 86236 | 83097 | 79969 | 19386 | 23311 | 23311 | 23311 | 23311 |
| 100% load | 146074 | 137523 | 129025 | 120581 | 112190 | 25848 | 28462 | 28462 | 28462 | 28462 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 15061 | 15061 | 9084 | 12058 | 15061 | 21832 | 21832 | 22517 | 22517 | 23203 |
| 50% load | 19485 | 19485 | 19485 | 19485 | 19485 | 45034 | 43664 | 45034 | 45034 | 45034 |
| 75% load | 25279 | 25279 | 25279 | 25279 | 25279 | 77888 | 75812 | 75812 | 75812 | 75812 |
| 100% load | 31081 | 31081 | 31081 | 29771 | 28462 | 114981 | 112190 | 112190 | 112190 | 112190 |

Heat Dissipation for 800 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 35160 | 35160 | 34407 | 34407 | 34407 | 15351 | 15351 | 8988 | 8988 | 8988 |
| 50% load | 59835 | 58349 | 56867 | 55387 | 53911 | 19378 | 19378 | 15180 | 15180 | 15180 |
| 75% load | 91985 | 89752 | 85300 | 84190 | 83081 | 22770 | 22770 | 22770 | 22770 | 22770 |
| 100% load | 131616 | 128620 | 119669 | 112253 | 104876 | 30360 | 27572 | 27572 | 27572 | 27572 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 17497 | 18216 | 17497 | 17857 | 18216 | 26956 | 21831 | 21105 | 21105 | 7590 |
| 50% load | 20784 | 20784 | 20784 | 20784 | 20784 | 50968 | 43662 | 48036 | 48036 | 48036 |
| 75% load | 24865 | 24865 | 24865 | 24865 | 24865 | 78657 | 65493 | 67676 | 67676 | 67676 |
| 100% load | 30360 | 30360 | 27572 | 26180 | 24790 | 113733 | 101935 | 104876 | 104876 | 104876 |

Heat Dissipation for 1000 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 36468 | 39259 | 39259 | 39259 | 39259 | 12112 | 15635 | 16521 | 16521 | 16521 |
| 50% load | 71083 | 71083 | 69234 | 69234 | 65547 | 15493 | 18975 | 20721 | 20721 | 20721 |
| 75% load | 120581 | 117778 | 109405 | 109405 | 101083 | 20637 | 25848 | 25848 | 25848 | 25848 |
| 100% load | 187156 | 175802 | 164520 | 164520 | 142167 | 27516 | 30987 | 30987 | 30987 | 30987 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 18297 | 18297 | 10360 | 14311 | 18297 | 28198 | 28198 | 29110 | 29110 | 30023 |
| 50% load | 22470 | 22470 | 22470 | 22470 | 22470 | 58219 | 56397 | 58219 | 58219 | 58219 |
| 75% load | 28462 | 28462 | 28462 | 28462 | 28462 | 101083 | 98321 | 98321 | 98321 | 98321 |
| 100% load | 34465 | 34465 | 34465 | 32725 | 30987 | 149587 | 145873 | 145873 | 145873 | 145873 |

Heat Dissipation for 1100 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 43185 | 43185 | 42160 | 43185 | 41136 | 18173 | 17199 | 17199 | 16713 | 16227 |
| 50% load | 82273 | 78192 | 76158 | 76158 | 70080 | 22793 | 22793 | 22793 | 21832 | 20872 |
| 75% load | 132639 | 123409 | 120345 | 120345 | 108153 | 28433 | 25564 | 25564 | 26998 | 28433 |
| 100% load | 201700 | 185100 | 180972 | 180972 | 152315 | 37911 | 37911 | 37911 | 35997 | 34086 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 21107 | 21107 | 20127 | 18173 | 21107 | 35040 | 37064 | 36051 | 32021 | 36051 |
| 50% load | 24717 | 22793 | 24717 | 22793 | 24717 | 66050 | 66050 | 70080 | 64041 | 68063 |
| 75% load | 34189 | 34189 | 34189 | 28433 | 31308 | 163830 | 102095 | 105121 | 108153 | 105121 |
| 100% load | 53291 | 41744 | 41744 | 34086 | 37911 | 156383 | 164545 | 176852 | 160460 | 152315 |

Heat Dissipation for 1250 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 49074 | 49074 | 47909 | 47909 | 46746 | 20651 | 19544 | 19544 | 18992 | 18440 |
| 50% load | 93492 | 88854 | 86543 | 83084 | 79637 | 25901 | 25901 | 25901 | 24809 | 23718 |
| 75% load | 154237 | 143726 | 140237 | 133281 | 126354 | 35578 | 32311 | 32311 | 30680 | 29050 |
| 100% load | 233945 | 215042 | 210341 | 193965 | 177708 | 43081 | 43081 | 43081 | 40906 | 38734 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 22872 | 22872 | 21760 | 22316 | 22872 | 36387 | 38672 | 37528 | 37528 | 37528 |
| 50% load | 28088 | 25901 | 28088 | 28088 | 28088 | 72774 | 72774 | 77345 | 77345 | 75057 |
| 75% load | 35578 | 35578 | 35578 | 33943 | 32311 | 119455 | 119455 | 122901 | 122901 | 122901 |
| 100% load | 56175 | 43081 | 43081 | 40906 | 38734 | 177708 | 186983 | 200969 | 200969 | 173085 |

Heat Dissipation (BTU/hr) for UPSs with 1500 kW I/O Cabinet

Heat Dissipation for 500 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|-------|-------|-------|-------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 17309 | 16387 | 16387 | 16387 | 18698 | 5618 | 5618 | 5618 | 6056 | 6495 |
| 50% load | 32774 | 30938 | 30938 | 31396 | 31855 | 7747 | 7747 | 7747 | 7747 | 7747 |
| 75% load | 53313 | 50542 | 50542 | 50542 | 50542 | 11620 | 11620 | 11620 | 10969 | 10319 |
| 100% load | 86017 | 82260 | 82260 | 75723 | 69234 | 13758 | 13758 | 13758 | 13758 | 13758 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 6495 | 6495 | 6495 | 7155 | 7818 | 18234 | 18234 | 18234 | 18234 | 18234 |
| 50% load | 7747 | 7747 | 7747 | 7747 | 7747 | 31855 | 31855 | 31855 | 31855 | 31855 |
| 75% load | 11620 | 11620 | 11620 | 10969 | 10319 | 53313 | 53313 | 53313 | 53313 | 53313 |
| 100% load | 15493 | 13758 | 13758 | 13758 | 13758 | 78519 | 78519 | 78519 | 78519 | 78519 |

Heat Dissipation for 750 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 26656 | 25271 | 25271 | 25271 | 27351 | 9084 | 9084 | 9084 | 9413 | 9742 |
| 50% load | 51926 | 49160 | 49160 | 47782 | 46407 | 12924 | 12924 | 12924 | 12272 | 11620 |
| 75% load | 86236 | 82053 | 82053 | 77888 | 73741 | 17430 | 17430 | 17430 | 16453 | 15478 |
| 100% load | 134684 | 129025 | 129025 | 117778 | 106625 | 23240 | 23240 | 23240 | 21938 | 20637 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 9742 | 9742 | 9742 | 10733 | 11727 | 27351 | 27351 | 27351 | 27351 | 27351 |
| 50% load | 12924 | 12924 | 12924 | 12924 | 12924 | 47782 | 47782 | 47782 | 47782 | 47782 |
| 75% load | 17430 | 17430 | 17430 | 16453 | 15478 | 79969 | 79969 | 79969 | 79969 | 79969 |
| 100% load | 23240 | 23240 | 23240 | 21938 | 20637 | 117778 | 117778 | 117778 | 117778 | 117778 |

Heat Dissipation for 1000 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 36468 | 34617 | 34617 | 33888 | 36468 | 12112 | 12112 | 12112 | 12112 | 12112 |
| 50% load | 71083 | 67389 | 67389 | 60137 | 61876 | 17232 | 17232 | 17232 | 16362 | 15493 |
| 75% load | 123390 | 117778 | 117778 | 98514 | 95564 | 23240 | 23240 | 23240 | 21938 | 20637 |
| 100% load | 187156 | 179579 | 179579 | 149141 | 145873 | 30987 | 30987 | 30987 | 29251 | 27516 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 13334 | 13334 | 13334 | 14313 | 15294 | 36468 | 35819 | 36468 | 36468 | 36468 |
| 50% load | 17254 | 17254 | 17254 | 16956 | 16657 | 63710 | 62976 | 63710 | 63710 | 63710 |
| 75% load | 24358 | 24358 | 24358 | 22496 | 20637 | 106625 | 104128 | 106625 | 106625 | 106625 |
| 100% load | 31342 | 31342 | 31342 | 29428 | 27516 | 157038 | 156664 | 157038 | 157038 | 157038 |

Heat Dissipation for 1250 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 44427 | 42118 | 42118 | 42118 | 44427 | 12950 | 12950 | 12950 | 13497 | 14044 |
| 50% load | 86543 | 81934 | 81934 | 78490 | 75057 | 19367 | 19367 | 19367 | 18282 | 17198 |
| 75% load | 147223 | 140237 | 140237 | 129814 | 119455 | 25796 | 25796 | 25796 | 24172 | 22549 |
| 100% load | 224474 | 215042 | 215042 | 196297 | 177708 | 30065 | 30065 | 30065 | 30065 | 30065 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 15569 | 15569 | 15569 | 17156 | 18748 | 45585 | 45585 | 45585 | 45585 | 45585 |
| 50% load | 19394 | 19394 | 19394 | 19721 | 20047 | 79637 | 79637 | 79637 | 79637 | 79637 |
| 75% load | 27191 | 27191 | 27191 | 25681 | 24172 | 133281 | 133281 | 133281 | 133281 | 133281 |
| 100% load | 34838 | 34838 | 34838 | 32451 | 30065 | 196297 | 196297 | 196297 | 196297 | 196297 |

Heat Dissipation for 1500 kW UPS

| | Normal operation | | | | | ECO mode | | | | |
|-------------|------------------|--------|--------|--------|--------|----------|-------|-------|-------|-------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 53313 | 50542 | 50542 | 50680 | 53313 | 15540 | 15540 | 15540 | 16131 | 16853 |
| 50% load | 103851 | 98321 | 98321 | 91275 | 92813 | 23240 | 23240 | 23240 | 21626 | 23240 |
| 75% load | 176667 | 168285 | 168285 | 151832 | 147481 | 30956 | 30956 | 30956 | 28889 | 27059 |
| 100% load | 269368 | 258050 | 258050 | 234549 | 213250 | 36079 | 36079 | 36079 | 37428 | 36079 |

| | eConversion | | | | | Battery operation | | | | |
|-------------|-------------|-------|-------|-------|-------|-------------------|--------|--------|--------|--------|
| Voltage (V) | 380 | 400 | 415 | 440 V | 480 V | 380 | 400 | 415 | 440 V | 480 V |
| 25% load | 18683 | 18683 | 18683 | 17234 | 22054 | 54702 | 51372 | 54702 | 54702 | 54285 |
| 50% load | 23273 | 23273 | 23273 | 20325 | 23129 | 95564 | 95014 | 95564 | 95564 | 96666 |
| 75% load | 32629 | 32629 | 32629 | 26436 | 27059 | 159938 | 159521 | 159938 | 159938 | 154530 |
| 100% load | 41806 | 41806 | 41806 | 35819 | 36079 | 235556 | 236677 | 235556 | 235556 | 229962 |

Options

Configuration Options

- eConversion mode
- Single or dual feed
- Default top or bottom cable entry
- N+1 redundancy
- Up to 4+1 UPSs in parallel
- Generator compatible
- Internal synchronization to alternate source (single system)
- Seismic rated brackets included
- Touchscreen LCD
- ECO mode

Hardware Options

Power Cabinet

- Galaxy VX 250 kW power cabinet (GVXP250KD)

Lithium-Ion Battery Cabinet

- Galaxy Lithium-ion battery cabinet with 17 battery modules (LIBSESMG17UL)
- Galaxy Lithium-ion battery communication cables 25 m (82 ft) (LIBSEOPT001)
- Galaxy Lithium-ion Battery Cabinet SMPS AC/DC Converter (LIBSEOPT002)

Maintenance Bypass Cabinets

- Galaxy VX 625 kW 480 V remote maintenance bypass cabinet (GVXMBCR625KG)
- Galaxy VX 750 kW 480 V remote maintenance bypass cabinet (GVXMBCR750KG)

Bypass Inductor Cabinet

- Galaxy VX 1250 kW Bypass Inductor Cabinet with Busbar Kit (GVXINDUCASSY)

Network Management Cards and Accessories

- Network management card 2 with environmental monitoring (AP9635)
- Network Management Card 3 with environmental monitoring (AP9643)
- Dry contact I/O accessory (AP9810)
- Temperature sensor (AP9335T)
- Temperature and humidity sensor (AP9335TH)

Options

- Backfeed protection kit, 1250 kW (GVXOPT001)¹⁰⁰
- Galaxy VX Lithium-ion BMS Power Supply Kit (GVXOPT002)¹⁰⁰
- Symmetra PX 250/500 paralleling cable kit (25 meters (82 feet) long) (SYOPT008)

100. Only applicable for 1250 kW I/O cabinet without preinstalled backfeed breaker BF2.

Limited Factory Warranty

One-Year Factory Warranty

The limited warranty provided by Schneider Electric in this Statement of Limited Factory Warranty applies only to products you purchase for your commercial or industrial use in the ordinary course of your business.

Terms of Warranty

Schneider Electric warrants that the product shall be free from defects in materials and workmanship for a period of one year from the date of product start-up, when start-up is performed by Schneider Electric-authorized service personnel, or within 18 months from the shipment date from Schneider Electric, whichever occurs first. This warranty covers repairing or replacing any defective parts including on-site labor and travel. In the event that the product fails to meet the foregoing warranty criteria, the warranty covers repairing or replacing defective parts at the sole discretion of Schneider Electric for a period of one year from the shipment date.

Non-transferable Warranty

This warranty is extended to the first person, firm, association or corporation (herein referred to by "You" or "Your") for whom the Schneider Electric product specified herein has been purchased. This warranty is not transferable or assignable without the prior written permission of Schneider Electric.

Assignment of Warranties

Schneider Electric will assign you any warranties which are made by manufacturers and suppliers of components of the Schneider Electric product and which are assignable. Any such warranties are assigned "AS IS" and Schneider Electric makes no representation as to the effectiveness or extent of such warranties, assumes no responsibility for any matters which may be warranted by such manufacturers or suppliers and extends no coverage under this Warranty to such components.

Drawings, Descriptions

Schneider Electric warrants for the warranty period and on the terms of the warranty set forth herein that the Schneider Electric product will substantially conform to the descriptions contained in the Schneider Electric Official Published Specifications or any of the drawings certified and agreed to by contract with Schneider Electric if applicable thereto ("Specifications"). It is understood that the Specifications are not warranties of performance and not warranties of fitness for a particular purpose.

Exclusions

Schneider Electric shall not be liable under the warranty if its testing and examination disclose that the alleged defect in the product does not exist or was

caused by end user or any third person misuse, negligence, improper installation or testing. Further, Schneider Electric shall not be liable under the warranty for unauthorized attempts to repair or modify wrong or inadequate electrical voltage or connection, inappropriate on-site operation conditions, corrosive atmosphere, repair, installation, start-up by non-Schneider Electric designated personnel, a change in location or operating use, exposure to the elements, Acts of God, fire, theft, or installation contrary to Schneider Electric recommendations or specifications or in any event if the Schneider Electric serial number has been altered, defaced, or removed, or any other cause beyond the range of the intended use.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE, OF PRODUCTS SOLD, SERVICED OR FURNISHED UNDER THIS AGREEMENT OR IN CONNECTION HEREWITH. SCHNEIDER ELECTRIC DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTION AND FITNESS FOR A PARTICULAR PURPOSE. SCHNEIDER ELECTRIC EXPRESS WARRANTIES WILL NOT BE ENLARGED, DIMINISHED, OR AFFECTED BY AND NO OBLIGATION OR LIABILITY WILL ARISE OUT OF, SCHNEIDER ELECTRIC RENDERING OF TECHNICAL OR OTHER ADVICE OR SERVICE IN CONNECTION WITH THE PRODUCTS. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES AND REMEDIES. THE WARRANTIES SET FORTH ABOVE CONSTITUTE SCHNEIDER ELECTRIC SOLE LIABILITY AND PURCHASER'S EXCLUSIVE REMEDY FOR ANY BREACH OF SUCH WARRANTIES. SCHNEIDER ELECTRIC WARRANTIES RUN ONLY TO PURCHASER AND ARE NOT EXTENDED TO ANY THIRD PARTIES.

IN NO EVENT SHALL SCHNEIDER ELECTRIC, ITS OFFICERS, DIRECTORS, AFFILIATES OR EMPLOYEES BE LIABLE FOR ANY FORM OF INDIRECT, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, ARISING OUT OF THE USE, SERVICE OR INSTALLATION, OF THE PRODUCTS, WHETHER SUCH DAMAGES ARISE IN CONTRACT OR TORT, IRRESPECTIVE OF FAULT, NEGLIGENCE OR STRICT LIABILITY OR WHETHER SCHNEIDER ELECTRIC HAS BEEN ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH DAMAGES, SPECIFICALLY, SCHNEIDER ELECTRIC IS NOT LIABLE FOR ANY COSTS, SUCH AS LOST PROFITS OR REVENUE, LOSS OF EQUIPMENT, LOSS OF USE OF EQUIPMENT, LOSS OF SOFTWARE, LOSS OF DATA, COSTS OF SUBSTITUANTS, CLAIMS BY THIRD PARTIES, OR OTHERWISE.

NO SALESMAN, EMPLOYEE OR AGENT OF SCHNEIDER ELECTRIC IS AUTHORIZED TO ADD TO OR VARY THE TERMS OF THIS WARRANTY. WARRANTY TERMS MAY BE MODIFIED, IF AT ALL, ONLY IN WRITING SIGNED BY AN SCHNEIDER ELECTRIC OFFICER AND LEGAL DEPARTMENT.

Warranty Claims

Customers with warranty claims issues may access the SCHNEIDER ELECTRIC worldwide customer support network through the SCHNEIDER ELECTRIC web site: <http://www.schneider-electric.com>. Select your country from the country selection pull-down menu. Open the Support tab at the top of the web page to obtain contact information for customer support in your region.

Schneider Electric
35 rue Joseph Monier
92500 Rueil Malmaison
France

+ 33 (0) 1 41 29 70 00



As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.

© 2016 – 2024 Schneider Electric. All rights reserved.

990-5451K-001