


# Galaxy VXL

## 500-1250 kW UPS

### Earthing Principles

Latest updates are available on the Schneider Electric website

8/2024

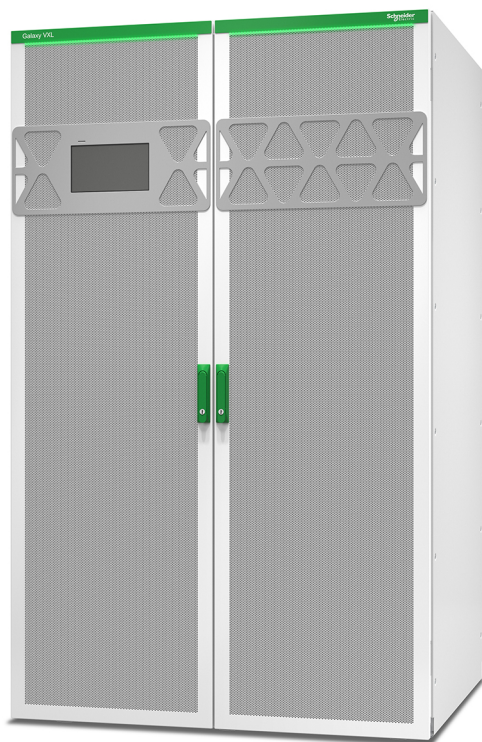

# Legal Information

The information provided in this document contains general descriptions, technical characteristics and/or recommendations related to products/solutions.

This document is not intended as a substitute for a detailed study or operational and site-specific development or schematic plan. It is not to be used for determining suitability or reliability of the products/solutions for specific user applications. It is the duty of any such user to perform or have any professional expert of its choice (integrator, specifier or the like) perform the appropriate and comprehensive risk analysis, evaluation and testing of the products/solutions with respect to the relevant specific application or use thereof.

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this document are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owner.

This document and its content are protected under applicable copyright laws and provided for informative use only. No part of this document may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the document or its content, except for a non-exclusive and personal license to consult it on an "as is" basis.

Schneider Electric reserves the right to make changes or updates with respect to or in the content of this document or the format thereof, at any time without notice.

**To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this document, as well as any non-intended use or misuse of the content thereof.**

---

# Table of Contents

Earthing Principles.....	5
Decoding the Earthing Types.....	5
TN Systems .....	6
TN-S Single Mains.....	9
TN-S Dual Mains .....	11
TN-S Dual Mains (Separate Sources) .....	13
TN-C-S Single Mains .....	15
TN-C-S Dual Mains.....	16
TN-C Single Mains .....	17
TN-C Dual Mains.....	18
TN-C Dual Mains (Separated Sources) .....	19
TT Systems.....	20
TT Single Mains .....	21
TT Dual Mains.....	22
TT Dual Mains (Separate Sources) .....	23
Dimensioning.....	24





# Earthing Principles

When considering a UPS installation, it is important to take into account the power system and the earthing requirements. For safety reasons proper UPS earthing is a must in case of a short circuit ensuring that a loop circuit is established for the fault current to return to its origin and thereby make the OCPD operate.

The following is based on the standards given in IEC 60364 and relates to the installation and earthing principles of the UPS systems from Schneider Electric.

According to the standards given in IEC 60364 all power systems are divided into three earthing types: TN, TT, IT.

**NOTE:** The UPS installation must always comply with local and national regulations, and some countries have exceptions to the IEC 60364 standard.

## Decoding the Earthing Types

First letter	T	Connected directly to main earth at a certain point in the power system, normally at the supplying transformer (T = Terra (Earth)).
	I	The power system is insulated from earth or connected to earth through a sufficient high impedance (I = Isolated).
Second letter	T	The exposed conductive parts are connected directly to earth e.g. the UPS chassis disregarding whether the power system is earthed or not.
	N	The exposed conductive parts e.g. the UPS chassis are connected directly to earth at the main earthing point (N = Neutral).
Additional letters	S	The Protective Conductor (PE) and Neutral Conductor (N) are two different and separate conductors (S = Split).
	C	The Protective Conductor (PE) and Neutral Conductor (N) are one common conductor (PEN) (C = Common).

# TN Systems

## Characteristics

TN systems have one point connected directly to earth. All exposed conductive parts must be connected to that point by protective conductors.

Depending on the way the neutral and protective conductors are fed, there are three types of TN systems:

- TN-S system: A separate protective conductor is used in the system.
- TN-C-S system: the neutral and protective conductors are combined to one single conductor in a part of the system and separated into two conductors in another part of the system.
- TN-C system: the neutral and protective conductors are combined to one single conductor in the whole system.

## Reference to IEC/EN 60364-4-41 413.1.3.1

All exposed conductive parts of the installation must be connected to the earthed point of the power system by protective conductors which must be earthed at or near to each relevant transformer or generator.

Exposed conductive parts that are accessible at the same time must be connected to the same earthing system, either individually, in groups or collectively.

Normally the earthed point of the power system is the neutral point. If a neutral point is not available or accessible, a phase conductor must be earthed. The phase conductor must not serve as a PEN conductor.

In fixed installations a single conductor may serve both as a protective conductor and a neutral conductor (PEN conductor).

## Reference to IEC/EN 60364-5-54, §543.4.3

If, from any point of the installation, the neutral and protective functions are provided by separate conductors, it is not permitted to connect the neutral conductor to any other earthed part of the installation (e.g. protective conductor from the PEN conductor). However, it is permitted to form more than one neutral conductor (N) and more than one protective conductor (PE) from the PEN conductor. Separate terminals or bars may be provided for the protective and neutral conductors. In this case, the PEN conductor shall be connected to the terminal or bar intended for the protective conductor (PE).

## UPS Systems are to be Considered as a Generating Set

IEC/EN60364-5-55 Clause 551.1.2.

Generating sets with the following electrical characteristics are considered:

- mains excited and separately excited synchronous generators;
- mains excited and self-excited asynchronous generators;
- mains-commutated and self-commutated static inverters with or without bypass facilities.

## Additional Requirements when the Generating Set (the UPS) Provides a Switched Alternative to the Public Supply (IEC/EN 60364-5-55 551.4.3.2)


Protection by automatic disconnection of supply must not rely on the connection to the earthed points of the public supply system when the generator is operating as a switched alternative. A suitable earth electrode must be provided.

## Protective Devices in TN Systems

The following protective devices are recognized in TN systems:

- Overcurrent protective devices
- Residual current protective devices (not to be used in TN-C systems)

When a residual current protective device is used in a TN-C-S system, a PEN conductor must not be used on the load side. The connection of the protective conductor to the PEN conductor must be made on the source side of the residual current protective device (see below illustration):

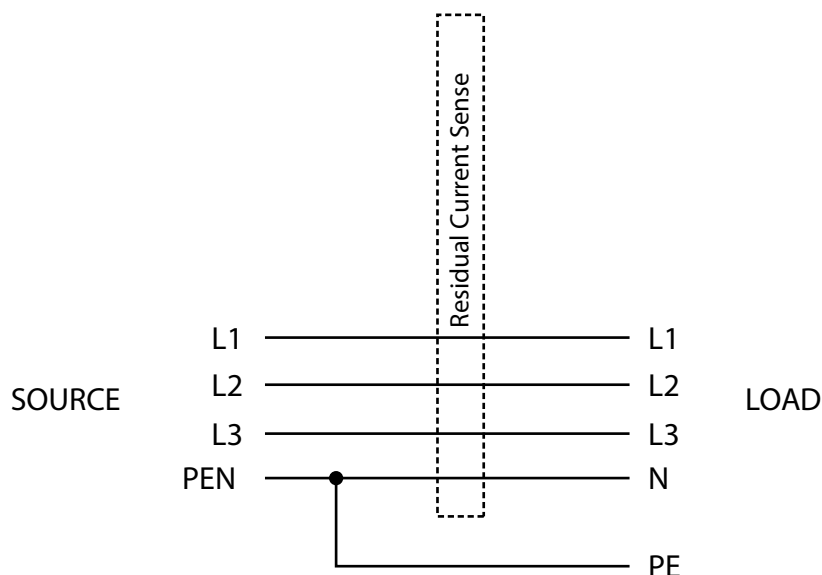

Due to the required installation of the functional earth, upstream protection by Residual Current Protective Devices will not be possible, as they will malfunction due to the leakage current from the UPS.

The characteristics of protective devices and the circuit impedances shall be such that, if a fault of negligible impedance occurs anywhere in the installation between a phase conductor and a protective conductor or exposed conductive part, automatic disconnection of the supply will occur within the specified time (five seconds - valid for distribution circuits, 413.1.3.5). The following condition fulfilling this requirement: IEC/EN 60364-4-41, §413.1.3.3.

$$Z_s \times I_a \leq U_0$$


In the condition:

- $Z_s$  is the impedance of the fault loop comprising the source, the live conductor up to the point of the fault, and the protective conductor between the point of the fault and the source
- $I_a$  is the current causing the automatic operation of the disconnecting protective device within a conventional time not exceeding five seconds
- $U_0$  is the nominal AC RMS voltage to earth


If a fault occurs directly on the output of the UPS but before the power distribution, while the UPS system is in Battery Operation and Bypass is unavailable, the available power is unable to activate the protective device. In this situation the Inverter will shut down in five seconds. (Demand in IEC 60364-4-41 413.1.3.5). If a residual protective device is used, this device will of course disconnect the supply.

TN-S Single Mains

TN-S Single Mains 3 Pole CB

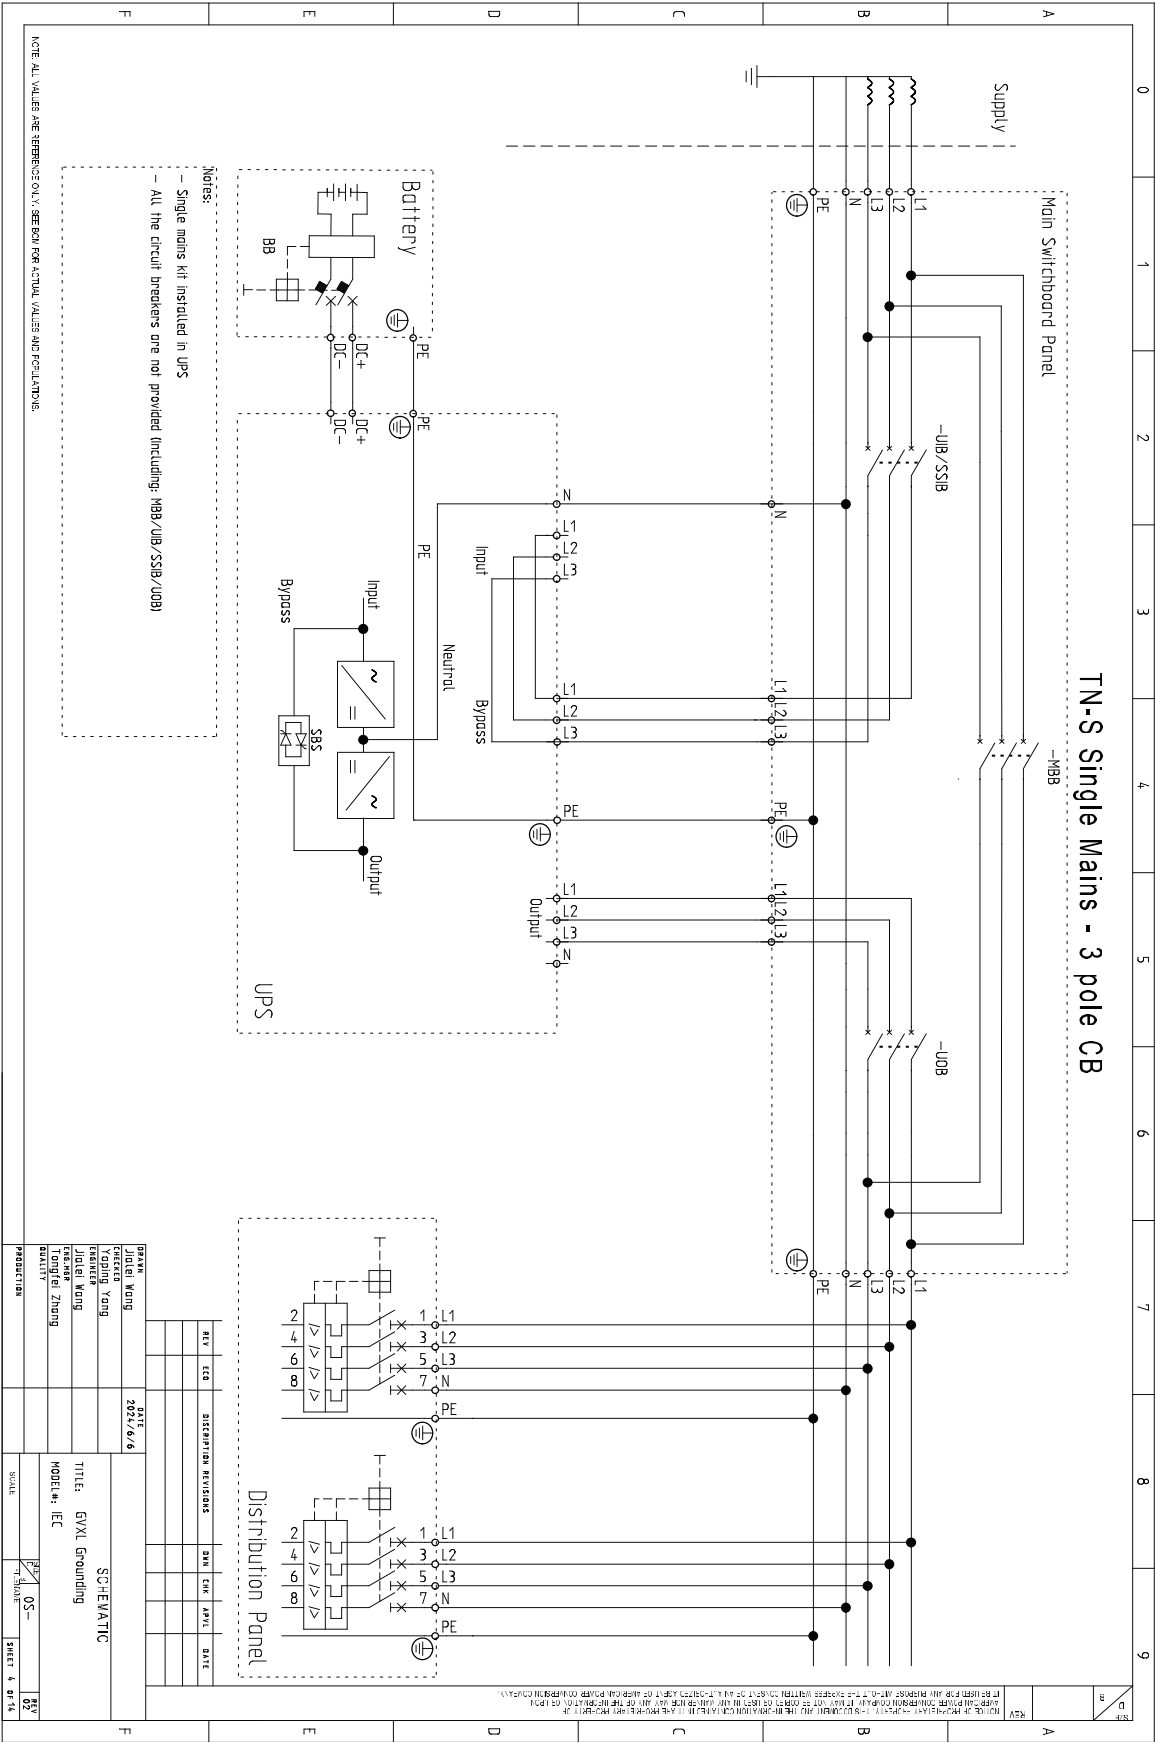


10




TN-S Dual Mains

TN-S Dual Mains 3 Pole CB

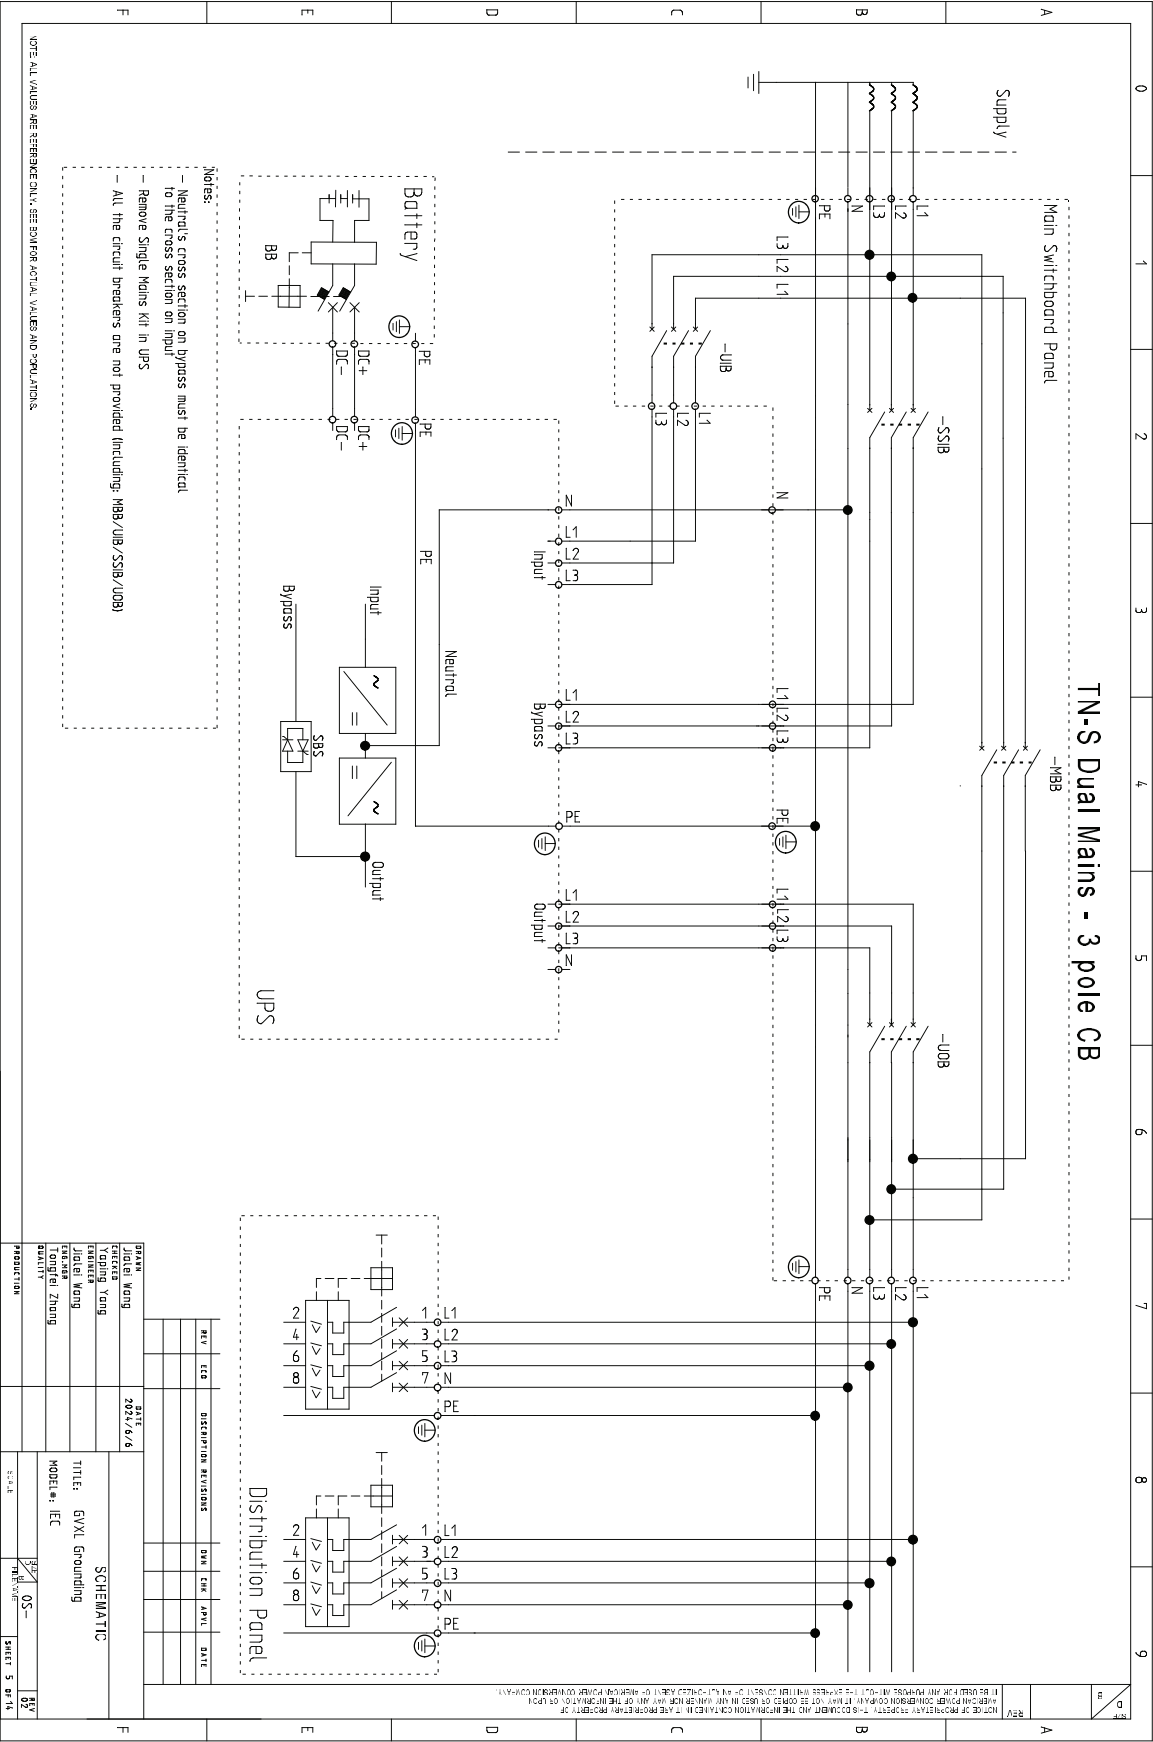


## 12






## TN-S Dual Mains (Separate Sources) 3 Pole CB

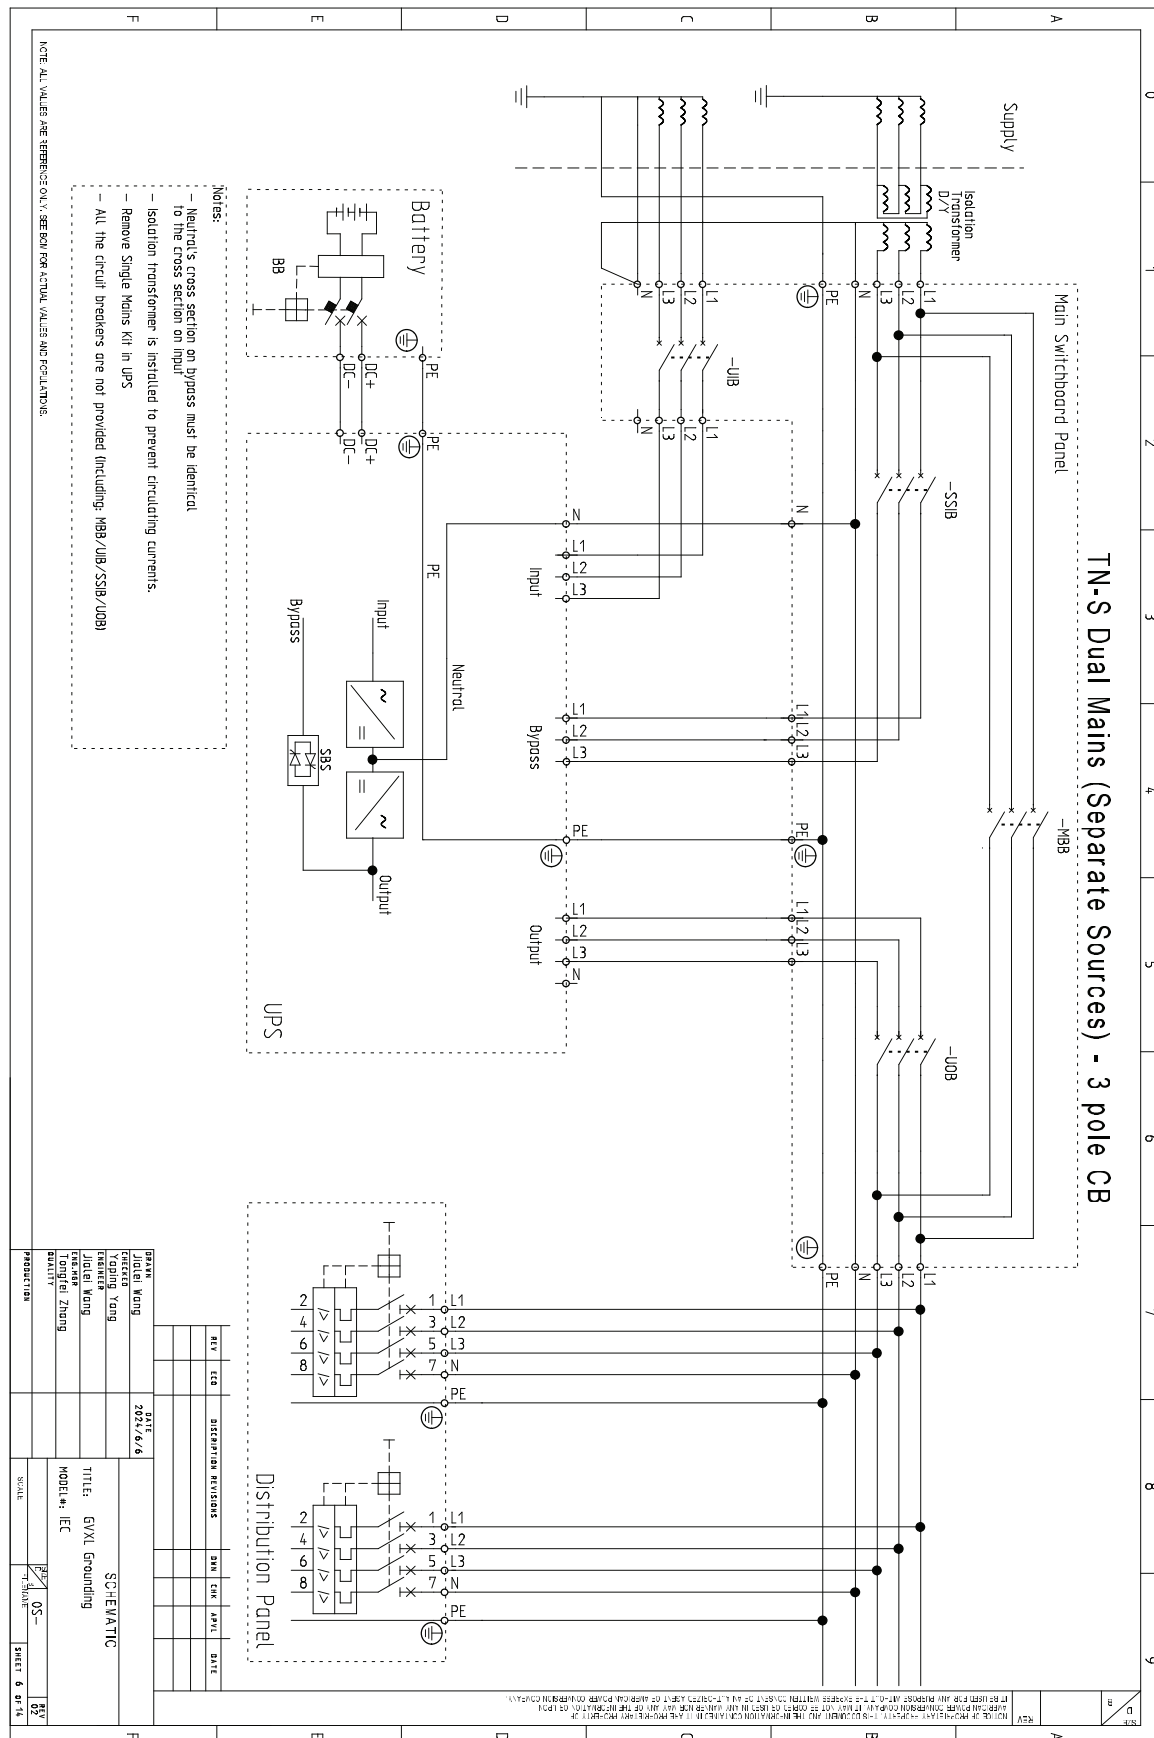


TN-S Dual Mains (Separate Sources) 4 Pole CB

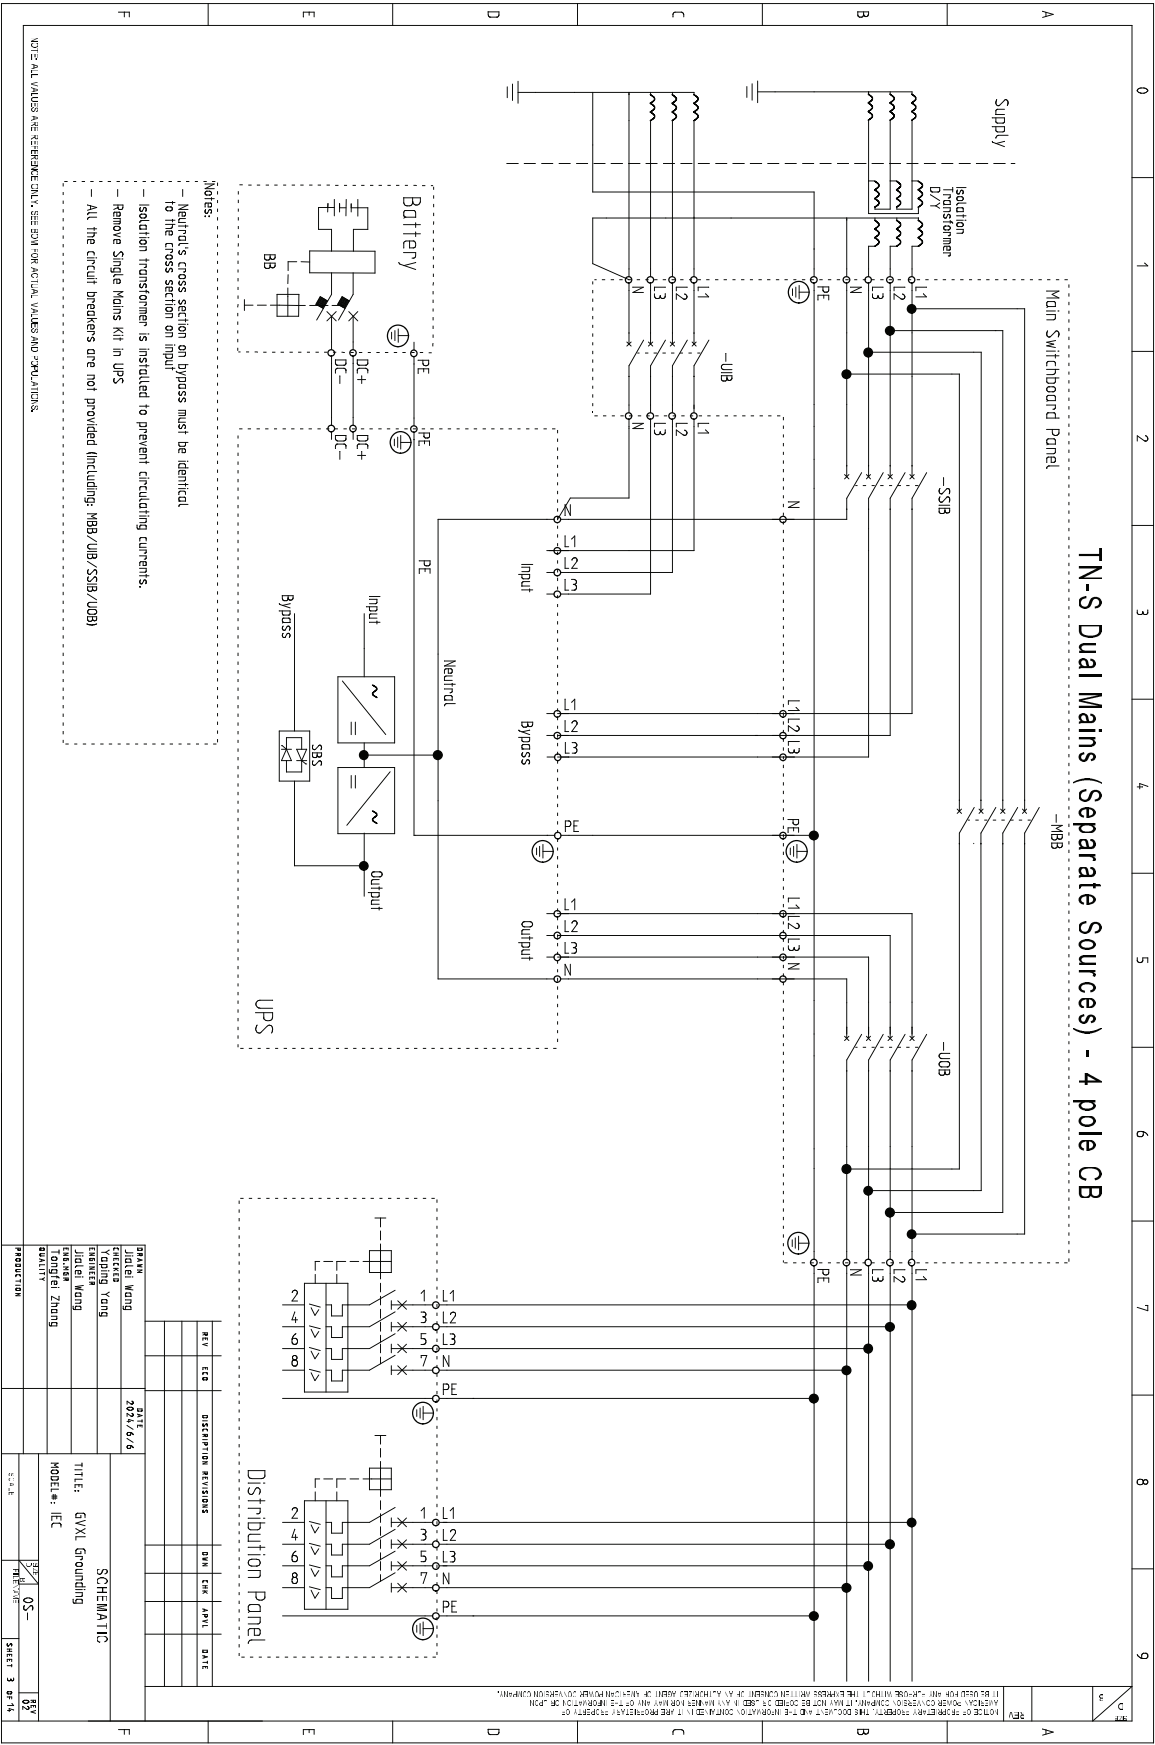


# TN-C-S Single Mains

## TN-C-S Single Mains 4 Pole CB

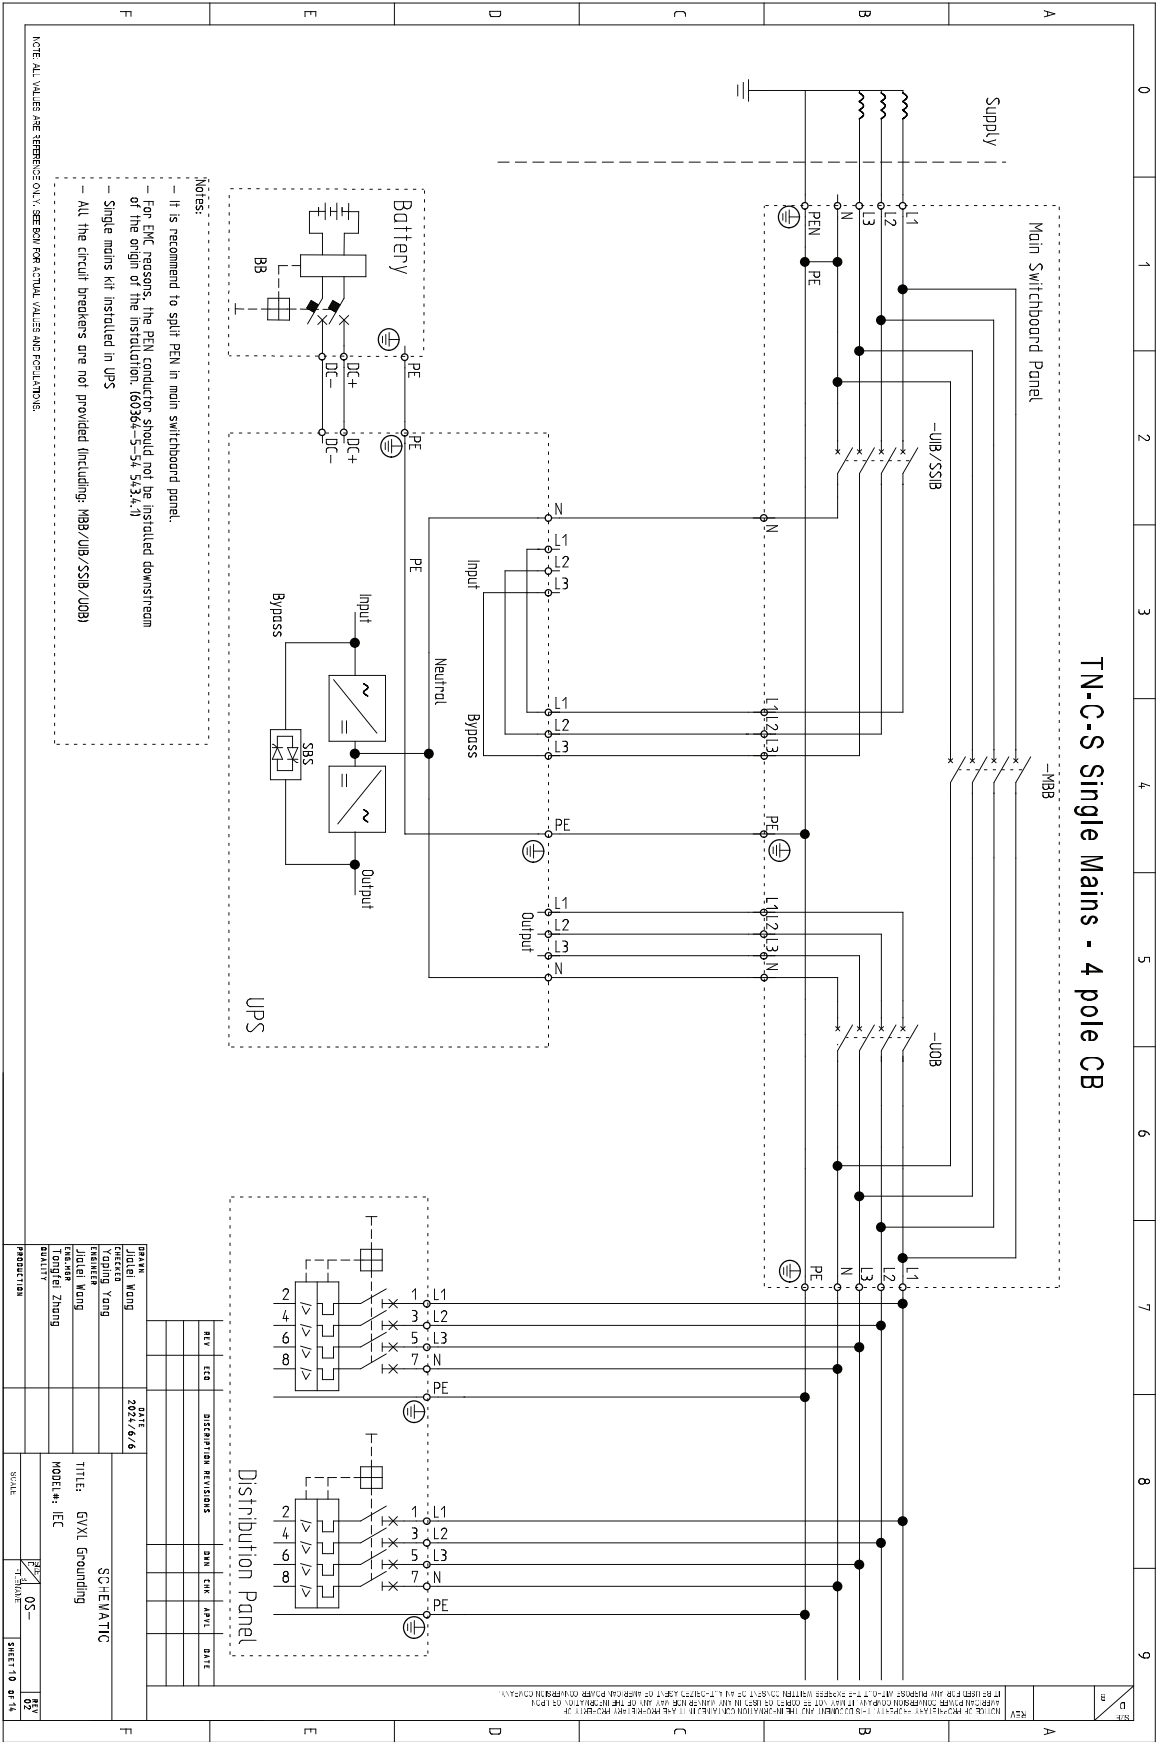


TN-C-S Dual Mains

TN-C-S Dual Mains 4 Pole CB

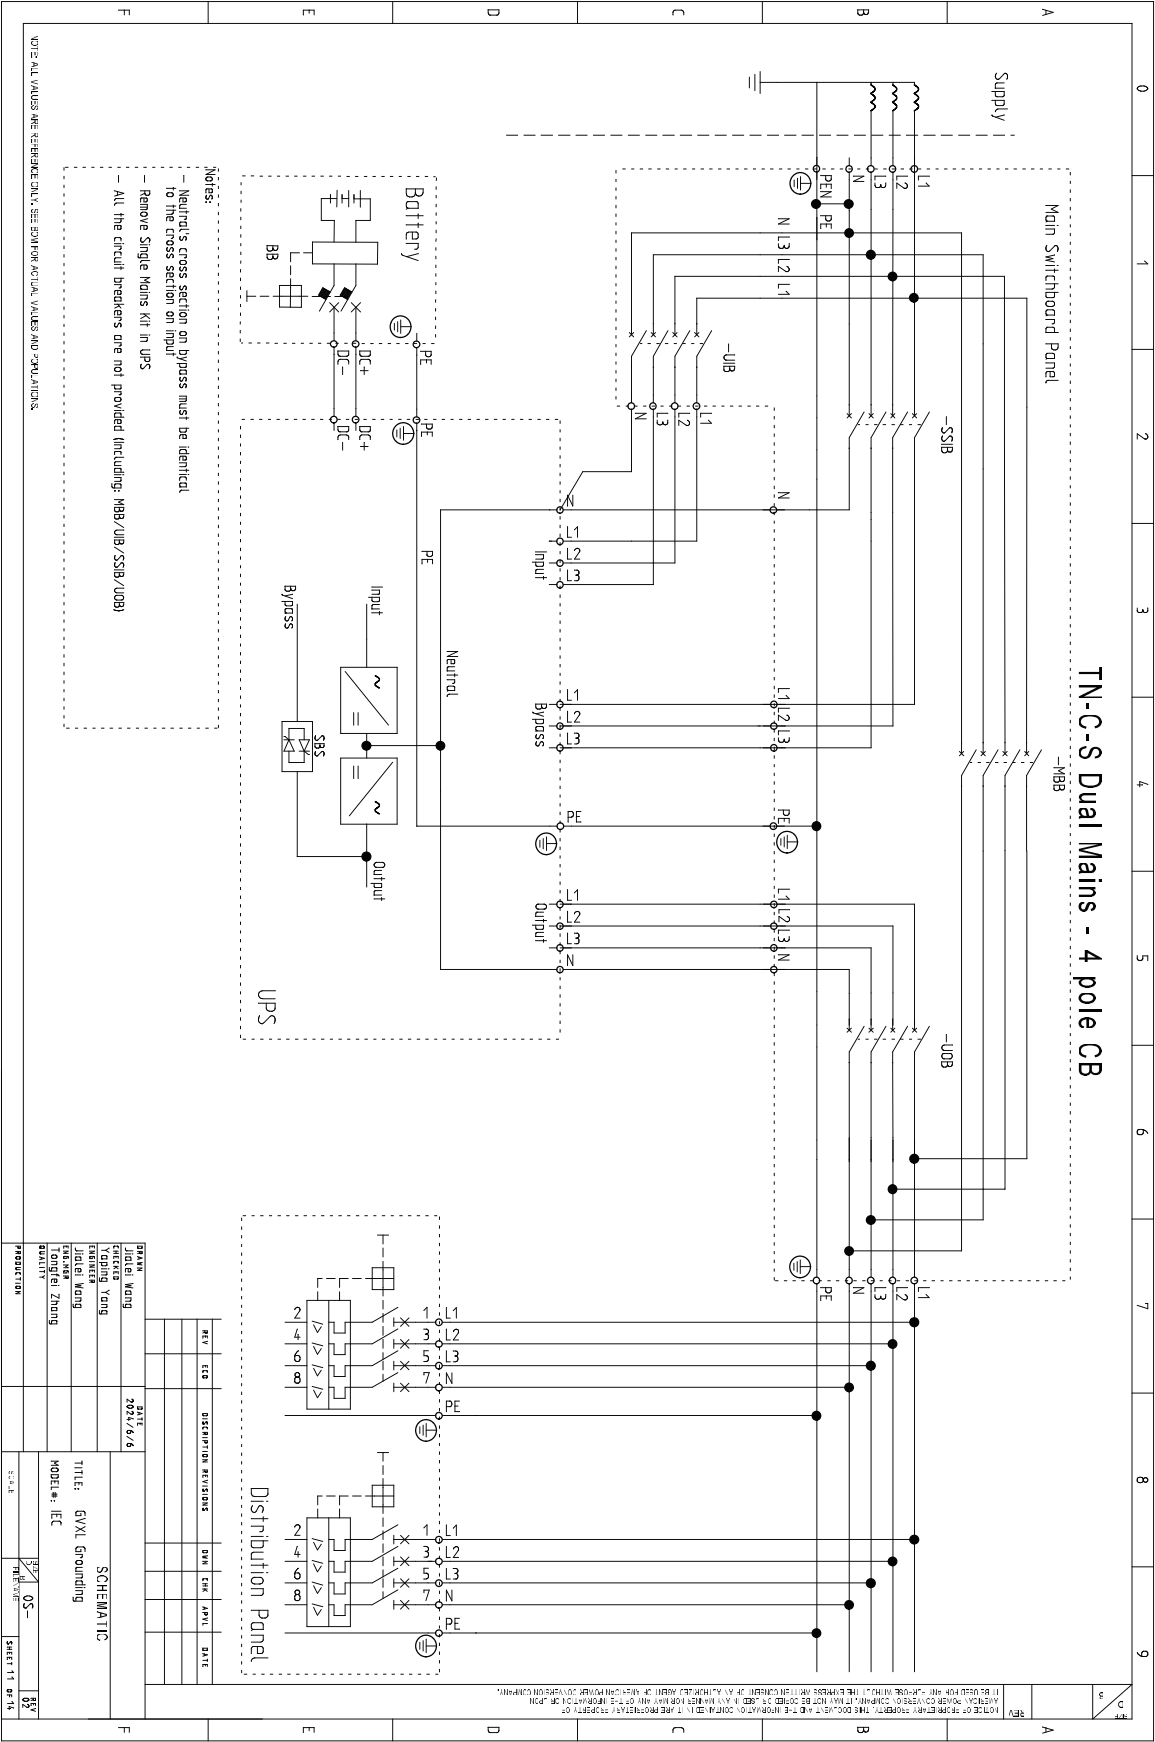


## TN-C Single Mains 3 Pole CB

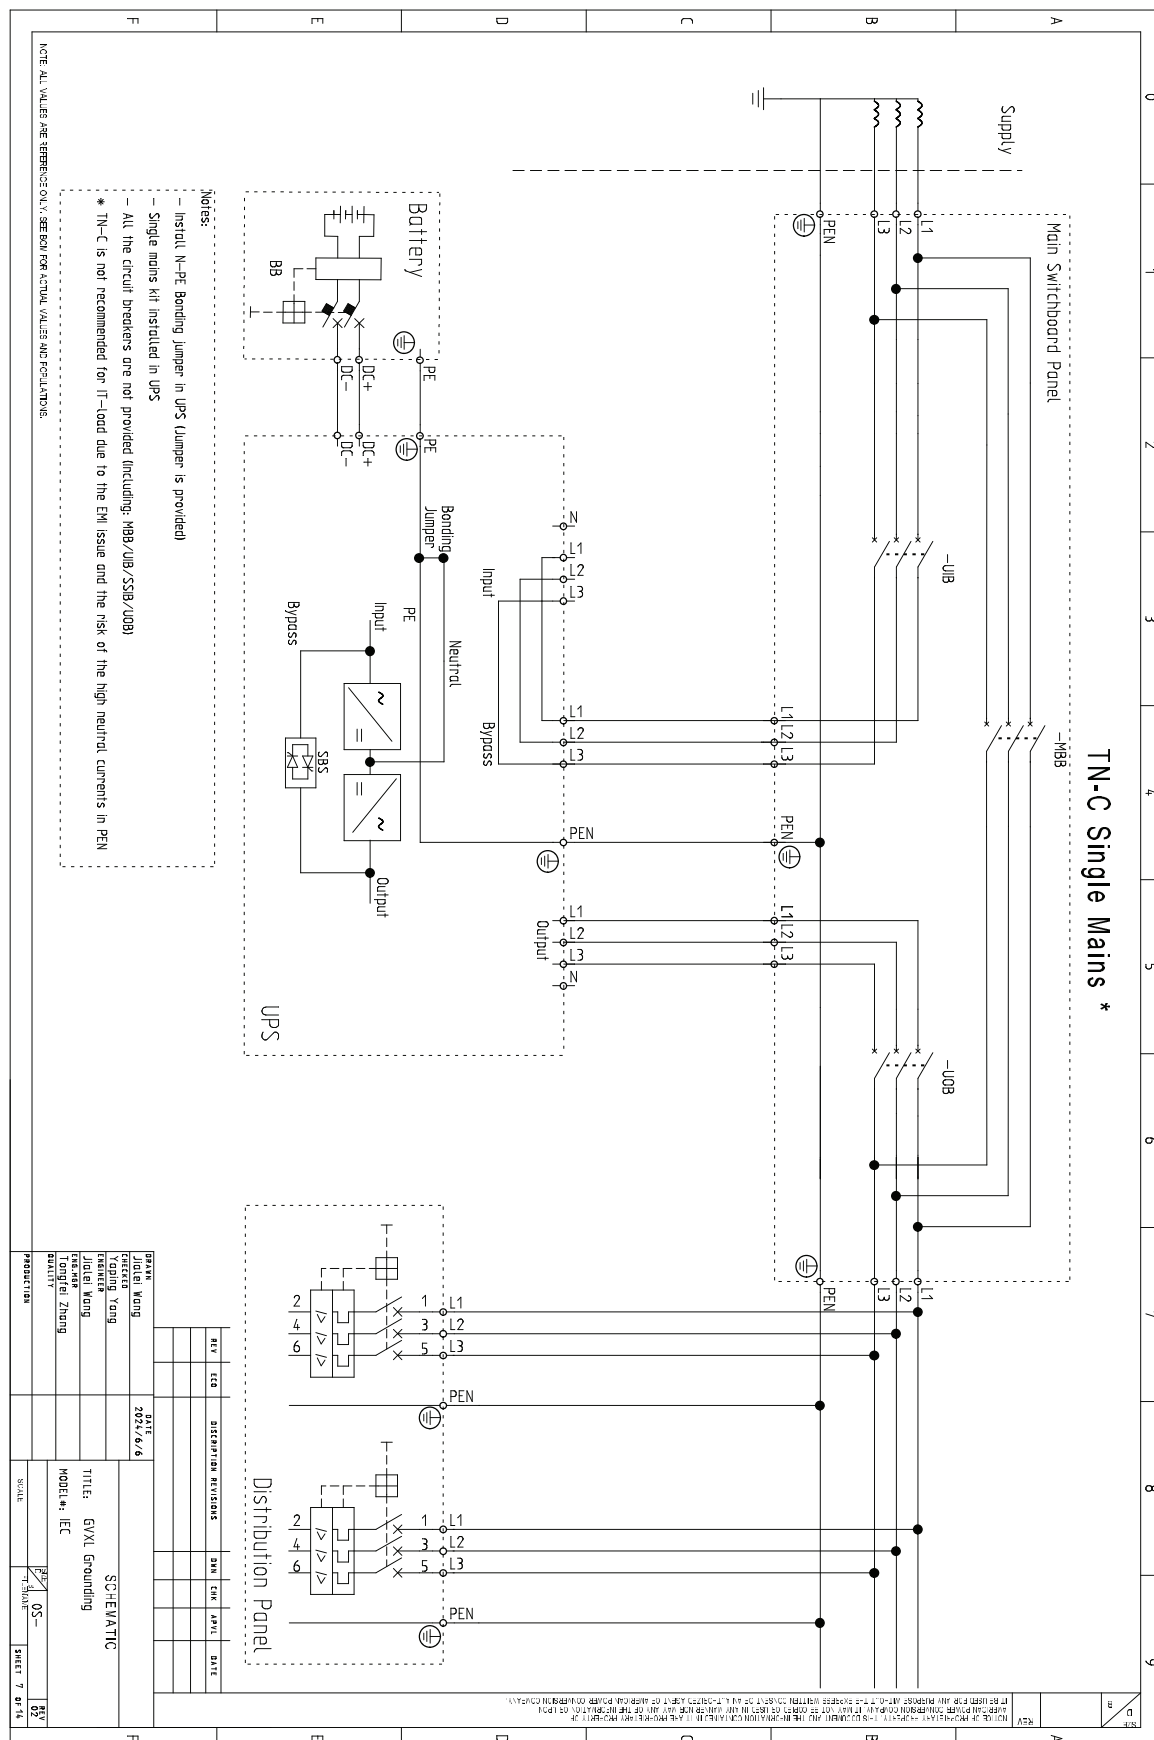


TN-C Dual Mains

TN-C Dual Mains 3 Pole CB

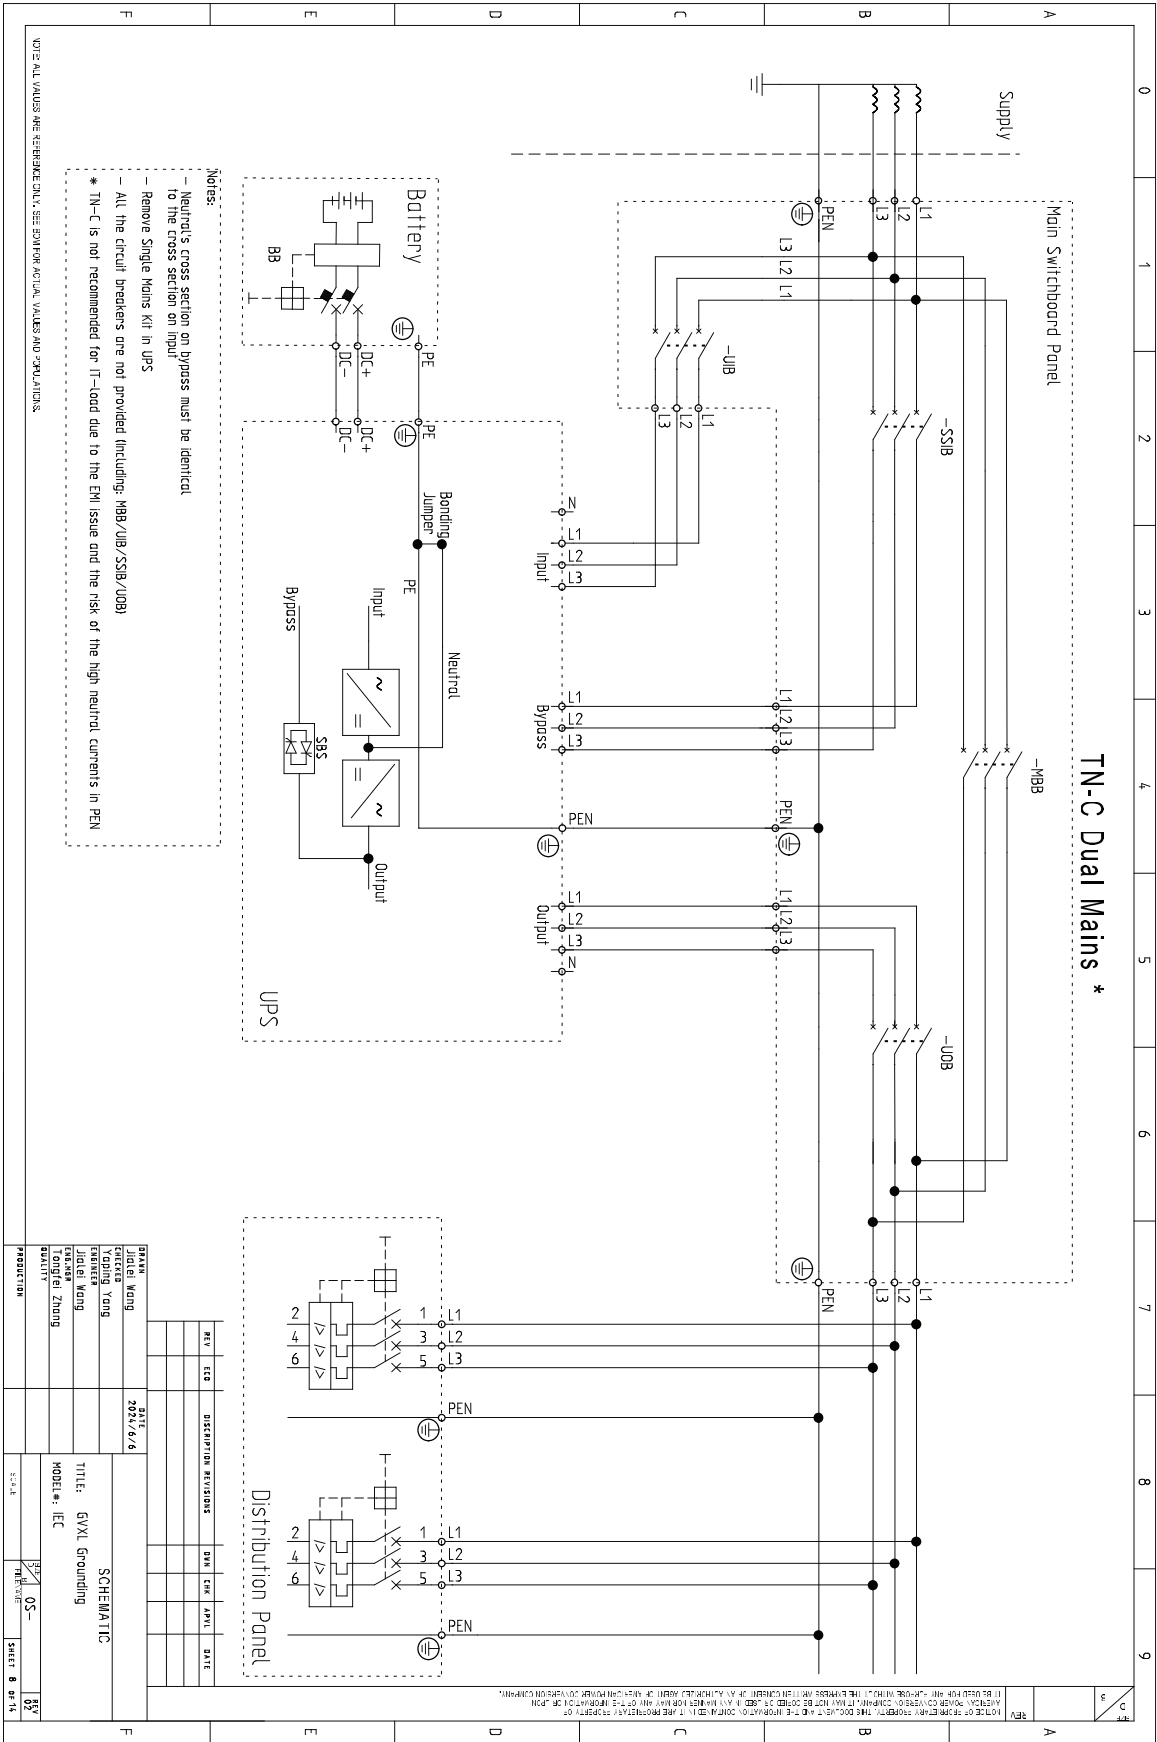

## TN-C Dual Mains (Separated Sources) 3 Pole CB

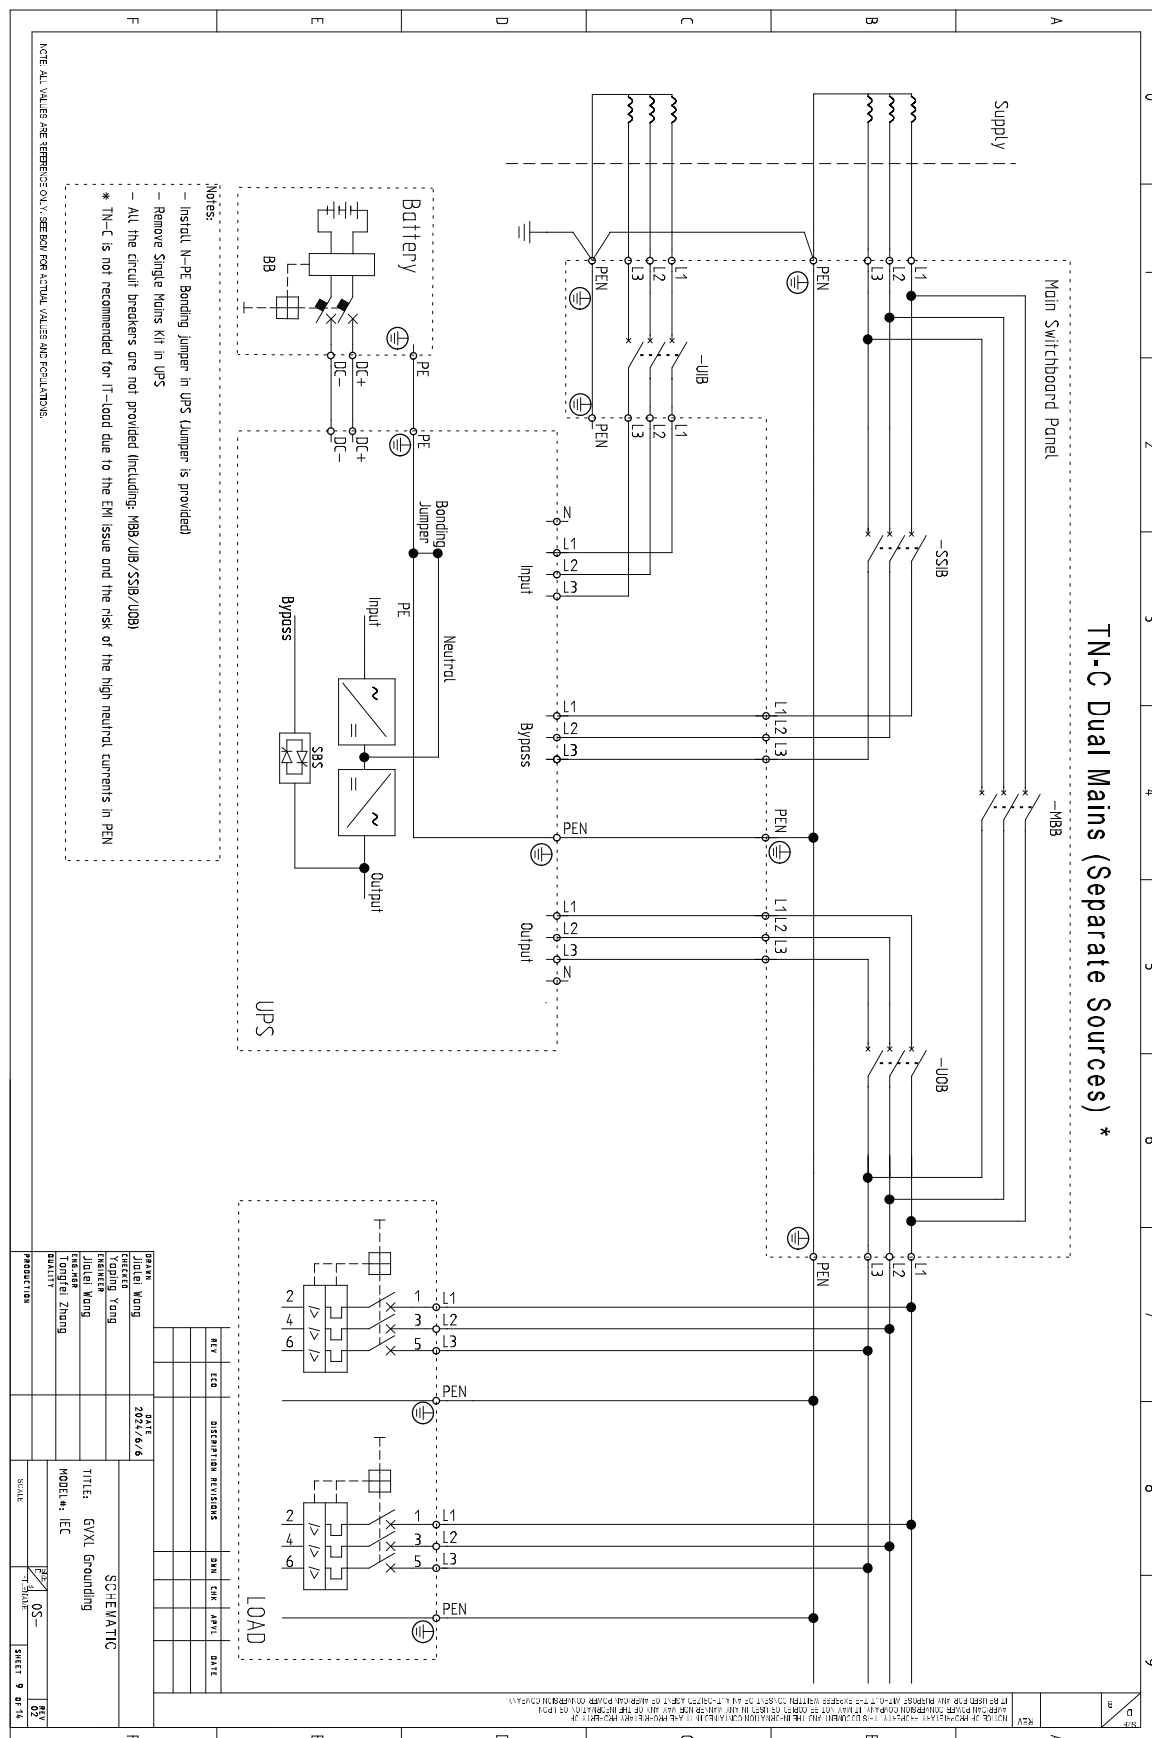

# TT Systems

**NOTE:** Due to the nature of a TT system and the use of Residual Current Protective Devices, it is recommended to install an isolation transformer upstream to the UPS.

## Characteristics

TT systems have one point connected directly to earth and all exposed conductive parts of the installation must be connected to earth electrodes. These earth electrodes are independent of the power system earthed point.

## Reference to IEC/EN 60364-4-41 413.1.4

All exposed conductive parts that are protected collectively by the same protective device must be connected to a common earth electrode together with the protective conductors. In installations where several protective devices are utilized in series, the requirement applies separately to all exposed conductive parts protected by each device.

The neutral point or, if a neutral point does not exist, a phase conductor of each generator station or transformer station must be earthed.

## Protective Devices in TT Systems

The following protective devices are recognized in TT systems:

- Overcurrent protective devices
- Residual current protective devices

Overcurrent protective devices are only applicable for protection against indirect contact in TT systems where a low  $R_A$  value exists (see specification below).

The condition " $R_A \times I_a \leq 50V$ " must be fulfilled. In the condition:

- $R_A$  is the sum of resistance of the earth electrode and the protective conductor for the exposed conductive parts
- $I_a$  is the current causing the automatic operation of the protective device.

When the protective device is a residual current protective device,  $I_a$  is the rated residual operating current  $I_{\Delta n}$

For discrimination purposes, S-type residual current protective devices may be used in series with general type residual current protective devices. To provide discrimination with S-type residual current protective devices, an operating time not exceeding 1 second is permitted in distribution circuits.


When the protective device is an overcurrent protective device, it must be either:

- a device with inverse time characteristics and  $I_a$  must be the current causing automatic operation within 5 seconds, or
- a device with an instantaneous tripping characteristic and  $I_a$  must be the minimum current causing instantaneous tripping



# TT Single Mains

## TT Single Mains 4 Pole CB

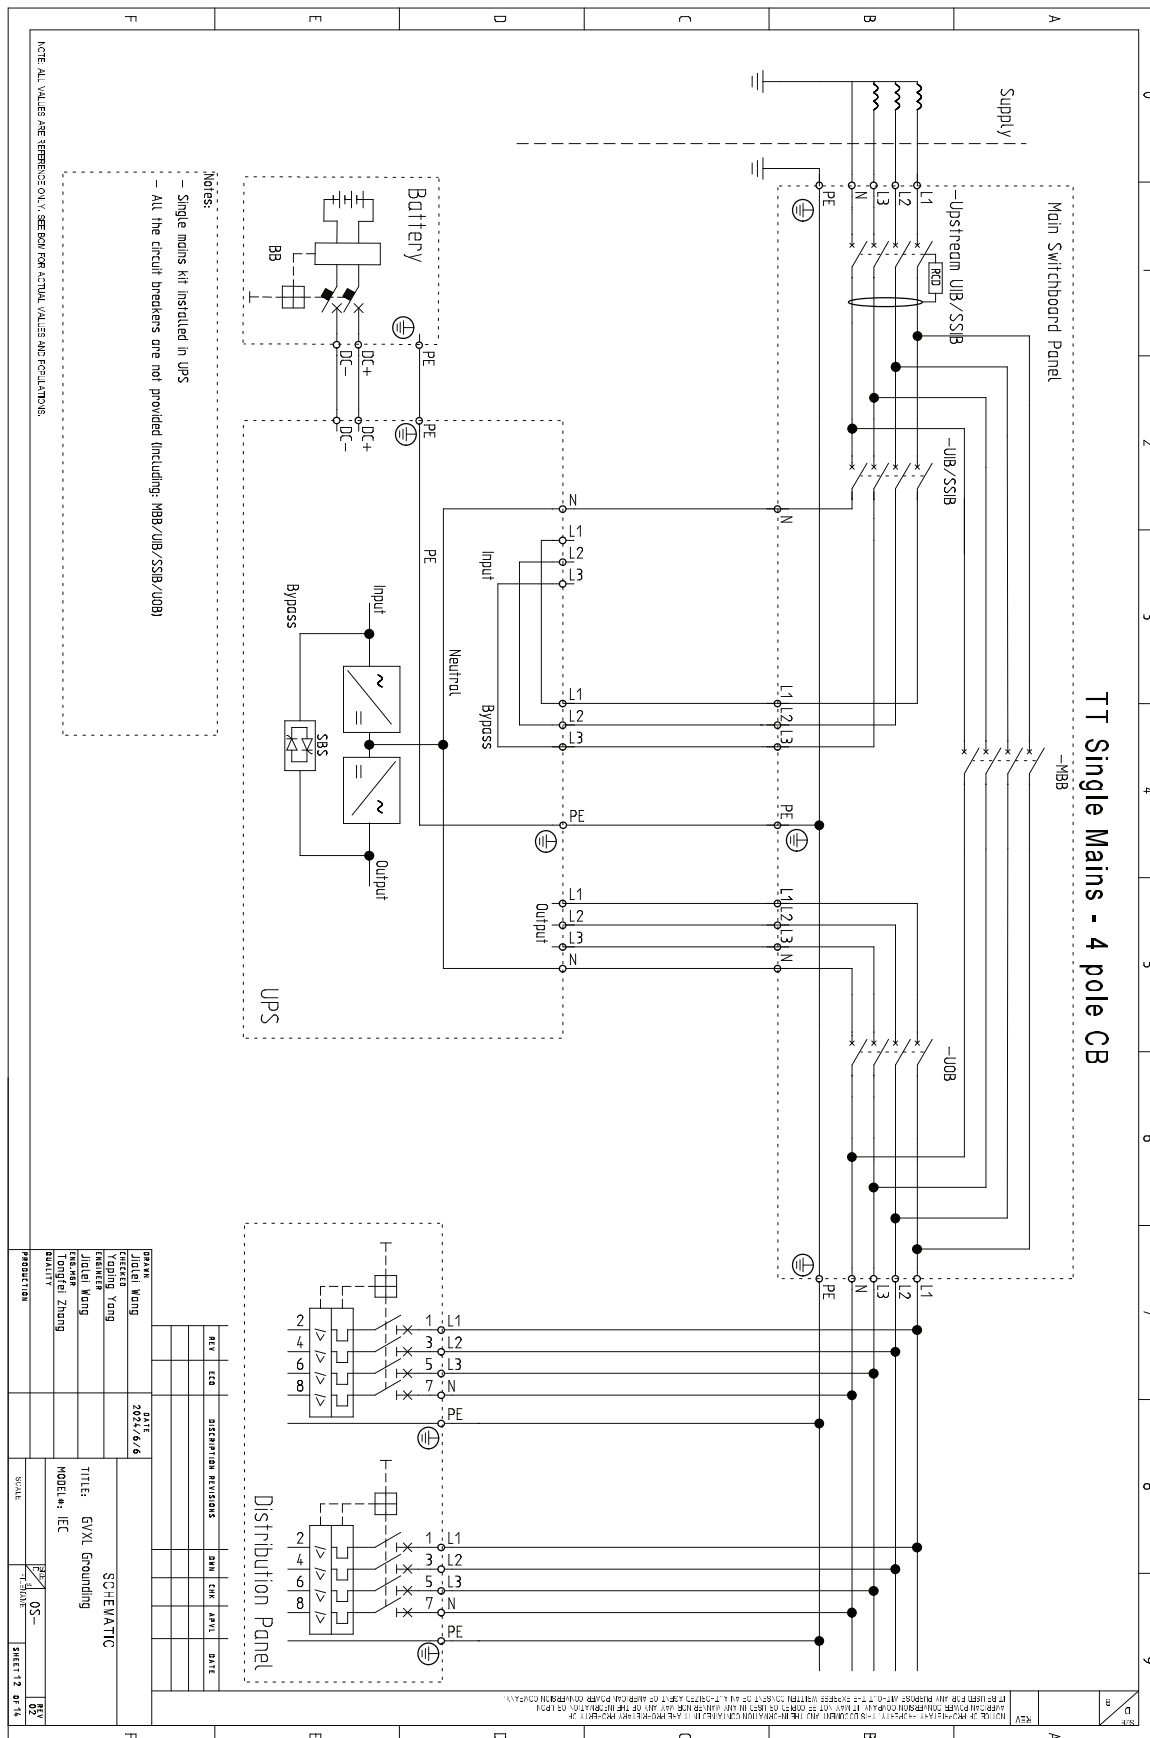


## TT Dual Mains 4 Pole CB



TT Dual Mains (Separate Sources)

TT Dual Mains (Separate Sources) 4 Pole CB

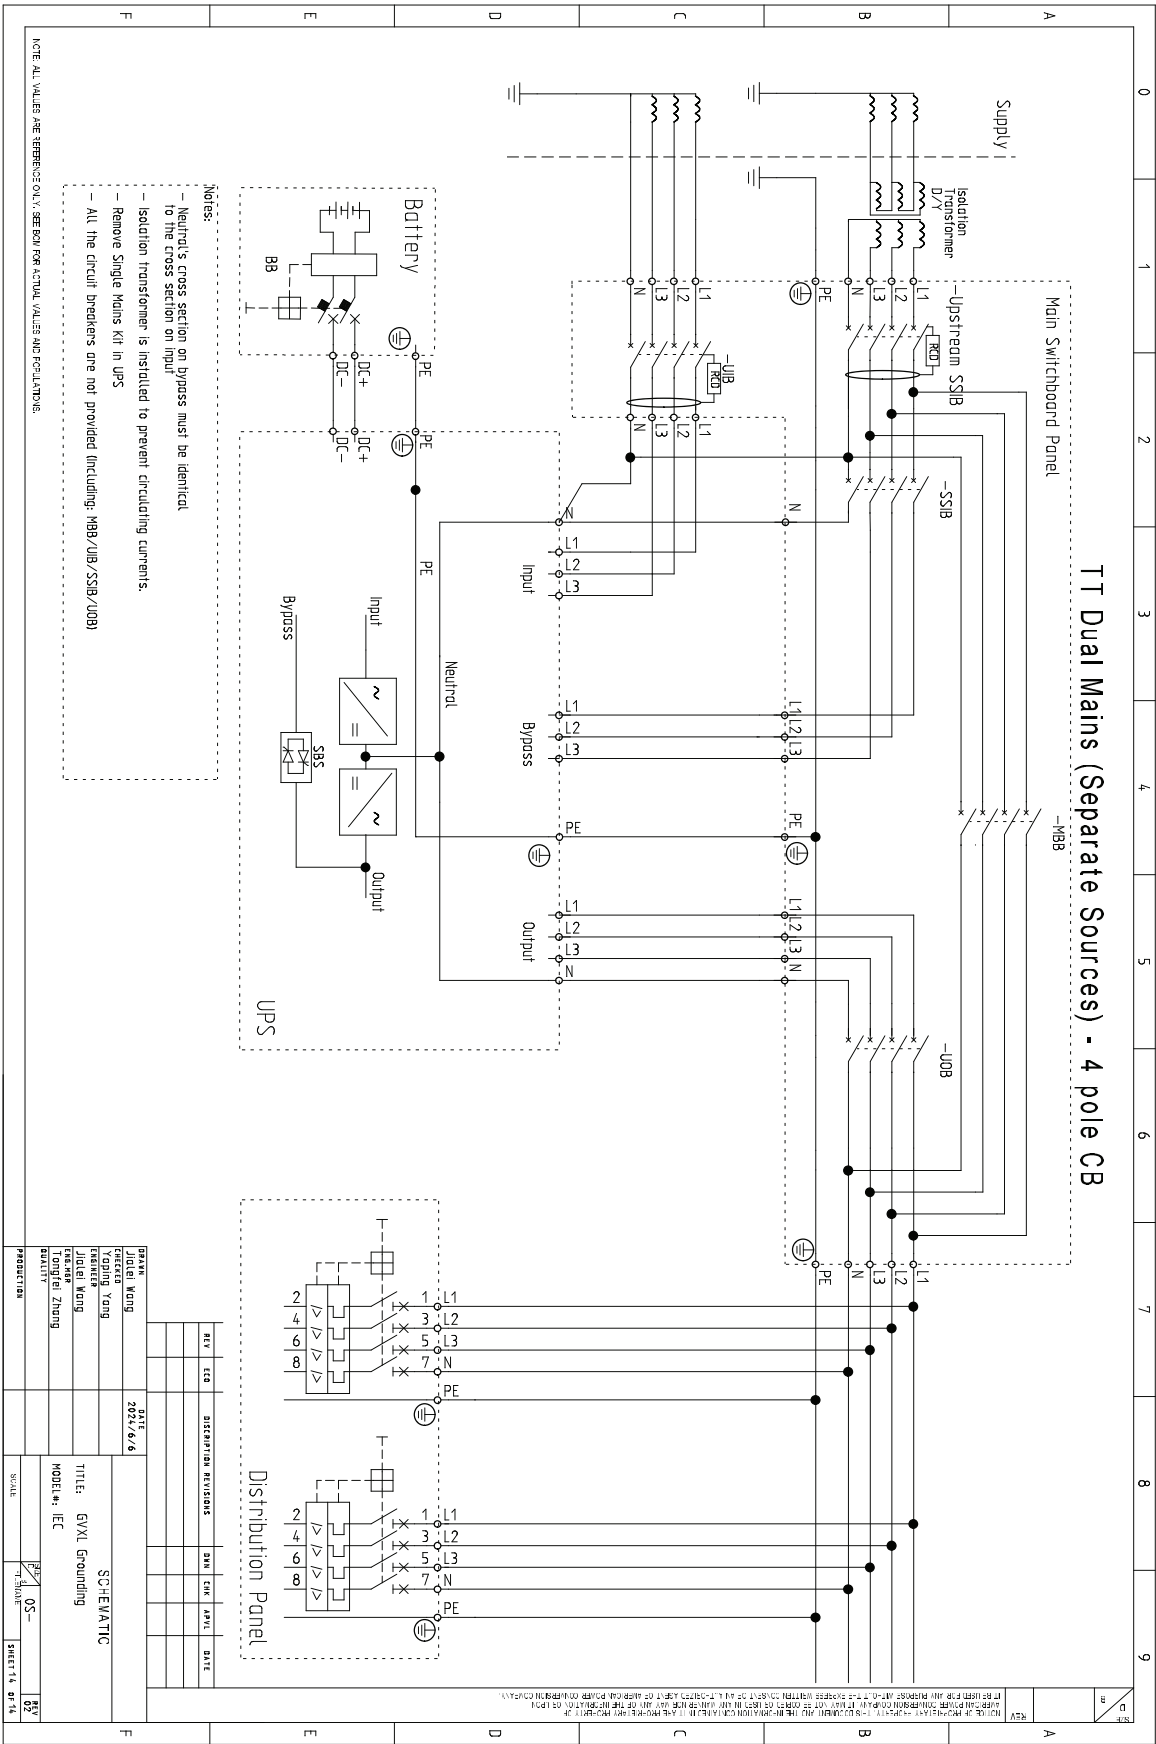

# Dimensioning

## Cross-Sectional Area of Protective Conductors

**NOTE:** The following section deals with dimensioning of the Protective Conductor (the PE conductor).

Reproduced Articles from IEC 60364-5-54

**543 Protective Conductors**

**543.1 Minimum cross-sectional areas**

**543.1.1** The cross-sectional area of every protective conductor shall satisfy the conditions for automatic disconnection of supply required in clause 413.1 of IEC 60364–4–41 and be capable of withstanding the prospective fault current.

The cross-sectional area of the protective conductor shall either be calculated in accordance with 543.1.2, or selected in accordance with table 54.3. In either case, the requirements of 543.1.3 shall be taken into account.

Terminals for protective conductors shall be capable of accepting conductors of dimensions required by this subclause

Cross-sectional area of line conductor $S$ mm <sup>2</sup>	Minimum cross-sectional area of the corresponding protective conductor mm <sup>2</sup>	
	If the protective conductor is of the same material as the line conductor	If the protective conductor is not of the same material as the line conductor
$16 \leq S$	$S$	$\frac{k_1}{k_2} \times S$
$16 < S \leq 35$	$16^a$	$\frac{k_1}{k_2} \times 16$
$S > 35$	$\frac{S^a}{2}$	$\frac{k_1}{k_2} \times \frac{S}{2}$
where		
$k_1$	is the value of $k$ for the line conductor, selected from table A.54.1 or from the tables in IEC 60364–4–43, according to the materials of the conductor and insulation;	
$k_2$	is the value of $k$ for the protective conductor selected from tables A.54.2 to A.54.6 as applicable	
<sup>a</sup>	For a PEN conductor, the reduction of the cross-sectional area is permitted only in accordance with the rules for sizing of the neutral conductor (see IEC 60364–5–52).	

**543.1.2.** The cross-sectional areas of protective conductors shall not be less than the value determined either

- in accordance with IEC 60949;
- or by the following formula applicable only for disconnection times not exceeding 5 s:

$$S = \frac{\sqrt{I^2 t}}{k}$$

where

- $S$  is the cross-sectional area, in  $\text{mm}^2$
- $I$  is the value (r.m.s) in A of prospective fault current for a fault negligible impedance, which can flow through the protective device (see IEC 60909–0);
- $t$  is the operating time of the prospective device for automatic disconnection in s;  
NOTE 1 Account should be taken of the current-limiting effect of the circuit impedances and the limitation of  $I^2t$  of the protective device.
- $k$  is the factor dependent on the material of the protective conductor, the insulation and other parts and the initial and the final temperatures (for calculation of  $k$ , see annex A).

If application of the formula produces non-standard sizes, conductors of a higher standard cross-sectional area shall be used.

NOTE 2 For limitations of temperatures for installations in potentially explosive atmospheres, see IEC 60079–0.

NOTE 3 As the metallic sheaths of mineral insulated cables according to IEC 60702–1 have an earth fault capacity greater than that of the line conductors, it is not necessary to calculate the cross-sectional area of the metallic sheaths when used as protective conductors.

**543.1.3** The cross-sectional area of every protective conductor which does not form part of the cable or which is not in a common enclosure with the line conductor shall be not less than

- 2,5  $\text{mm}^2$  Cu/16  $\text{mm}^2$  Al of protection against mechanical damage is provided
- 4  $\text{mm}^2$  Cu/16  $\text{mm}^2$  Al of protection against mechanical damage is not provided

Schneider Electric  
35 rue Joseph Monier  
92500 Rueil Malmaison  
France

+ 33 (0) 1 41 29 70 00

[www.se.com](http://www.se.com)

As standards, specifications, and design change from time to time,  
please ask for confirmation of the information given in this publication.

© 2024 – 2024 Schneider Electric. All rights reserved.

990-55122-001