

Wiser Temperature/Humidity Sensor

Device user guide

Information about features and functionality of the devices

05/2023



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Table of Contents

| | |
|---|----|
| Safety information | 4 |
| Wiser Temperature/Humidity Sensor | 5 |
| About the device | 5 |
| Installing the device | 6 |
| Pairing the device | 6 |
| Pairing device manually | 6 |
| Pairing device with auto scan | 8 |
| Configuring the device | 9 |
| Changing the device icon | 9 |
| Renaming the device | 10 |
| Changing the device location | 10 |
| Removing the device | 11 |
| Resetting the device | 11 |
| Using the device | 12 |
| Checking the device history | 12 |
| Creating an automation | 13 |
| Replacing the battery | 19 |
| LED indications | 19 |
| Troubleshooting | 20 |
| Technical Data | 20 |
| Compliance | 21 |
| Compliance information for Green Premium products | 21 |
| Trademarks | 21 |

Safety information

Important information

Read these instructions carefully and look at the equipment to become familiar with the device before trying to install, operate, service, or maintain it. The following special messages may appear throughout this manual or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.



The addition of either symbol to a “Danger” or “Warning” safety label indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that accompany this symbol to avoid possible injury or death.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **will result in** death or serious injury.

Failure to follow these instructions will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, **could result in** death or serious injury.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, **could result in** minor or moderate injury.

NOTICE

NOTICE is used to address practices not related to physical injury.

Wiser Temperature/Humidity Sensor



CLP593011

About the device

The Wiser Temperature/Humidity sensor (hereinafter referred to as **sensor**) combines two sensors in one unit. The sensor measures temperature and humidity in the environment where the sensor is installed. When the sensor is connected to the **Wiser Hub**, it reports the temperature and humidity data to the **Wiser Hub**.


The sensor triggers other Wiser devices (such as turning on an air conditioner if the temperature is high or turning on an exhaust fan if the humidity is high) through automation.

Features of the sensor:

- Detect temperature and humidity in the environment and passes the information to the **Wiser Hub**.
- Sends the battery level and offline device status information to the **Wiser Hub**.

Operating elements

- A. Status LED
- B. Function key

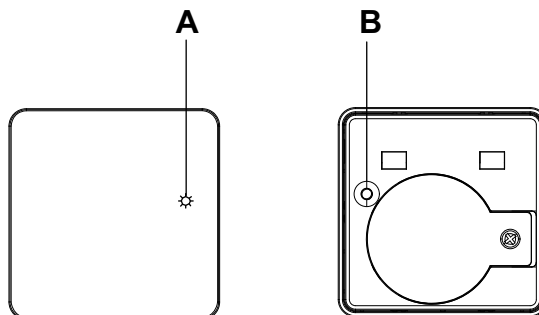

Installing the device

Refer to the installation instruction supplied with this product.

See Wiser Temperature Humidity Sensor.

NOTICE

EQUIPMENT DAMAGE

Do not install the sensor in a place where there is strong sunlight or wind (for example, close to the ventilation).


Failure to follow these instructions can result in equipment damage.


Pairing the device

Using the Wiser app, pair your device with the **Wiser Hub** to access and control the device. You can either add the device manually or do an auto-scan to pair it.

Pairing device manually

To pair the device manually:


1. On **Home** page, tap **+**.
2. Tap , select the required **Wiser Hub** on the slide-up menu.
3. Select an option to add the device (A):
 - **Add Device with Install Code**
 - **Add Device without Install Code**

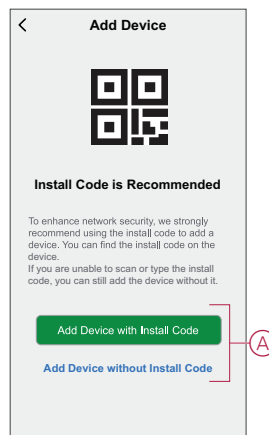



TIP: It is highly recommended to add the device with install code.

4. To pair the device with an install code, tap **Add Device with Install Code** to display the slide-up menu. Select any one of the options (B):
 - **Scan Install Code** - you can scan the device for the install code.
 - **Enter Install Code Manually** - you can manually enter the install code from the device.

After adding the device with install Code, proceed to **Step 6**.

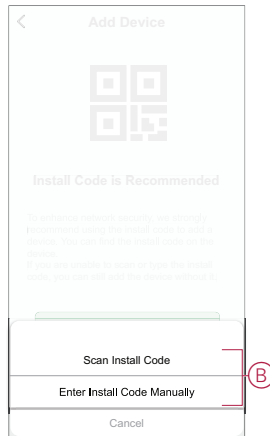

5. To pair the device without install code, tap **Add Device without Install Code**.
6. On the rear side of the sensor, short press the function key 3 times (< 0,5 s).

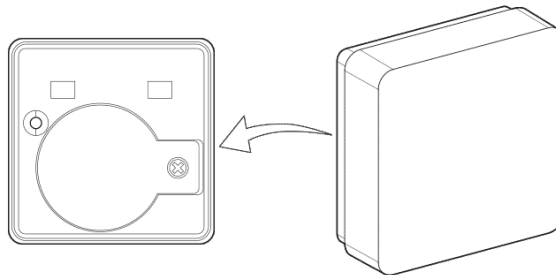


3 × < 0,5 s




The LED blinks orange.

- In the app, select **Confirm LED is flashing orange** and tap **Start configuration (C)**.

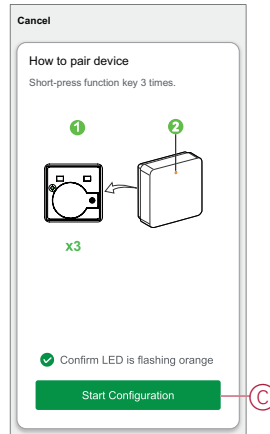

The app displays the progress of connecting the device.

- After a few seconds, a solid green LED indicates that the sensor is successfully paired to the Hub.

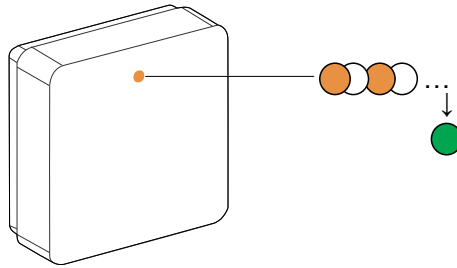

- Tap **Done** when the pairing is successful.

Pairing device with auto scan

Pairing the device with auto scan automatically discovers the device when the corresponding device is powered on.

- On the **Home** page, tap **+**.
- Tap **Auto scan > Confirm**.
- Enable permissions to **Access location** and **Wi-Fi** for scanning device and tap **Start scanning**.


NOTE: If you have multiple hubs, do Step 4 or proceed to Step 5.

- Tap **Select hub** and select the Wiser hub from the slide-up menu.
- Short press the setup/reset button 3 times (< 0,5 s) and wait for a few seconds until the device search is complete.

The LED blinks orange.

TIP: If you want to pair multiple devices at once, perform step 5 on each device and wait for a few seconds for them to be detected.

6. Tap **Next** (A) and select **Temperature Humidity Sensor**.

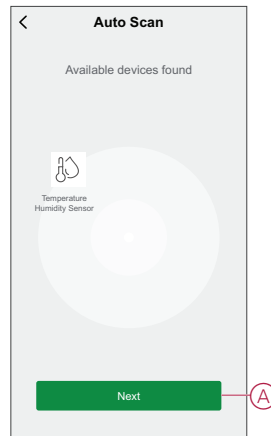




7. Once the device is added successfully, tap **Done**.

Configuring the device

Changing the device icon



You can change the device icon using the Wiser app.

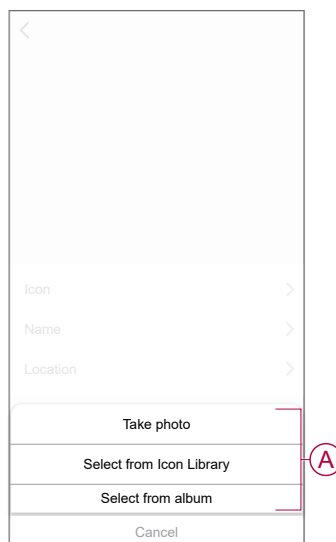
1. On the **Home** page, select the device for which you wish to change the icon.
2. At the top-right corner of the screen, tap .
3. Tap edit  next to the device name.
4. Tap **Icon** to view the menu.
5. In the slide-up menu, select any one of the following (A) to change the device icon:
 - **Take photo** - allows you to take a photo with your device camera.
 - **Select from Icon Library** - allows you to select an icon from the app library.
 - **Select from Album** - allows you to select a photo from the mobile gallery.



Renaming the device



You can rename the device using the Wiser app.

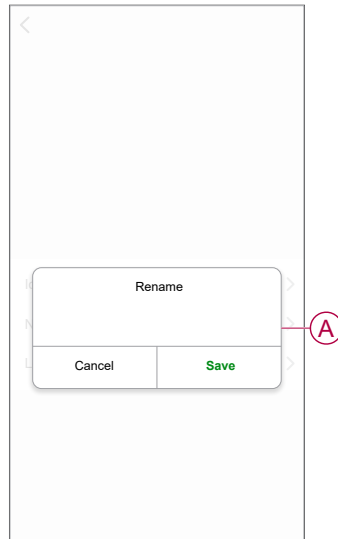
1. On the **Home** page, select the device for which you wish to rename.
2. At the top-right corner of the screen, tap .
3. Tap edit  next to the device name.
4. Tap **Name**, enter the new name (A) and then tap **Save**.



Changing the device location


You can change the device location using the Wiser app.


1. On the **Home** page, select the device for which you wish to change the location.
2. At the top-right corner of the screen, tap .
3. Tap edit  next to the device name.
4. Tap **Location**.
5. Select the desired location from the list (A) and then tap **Save**.

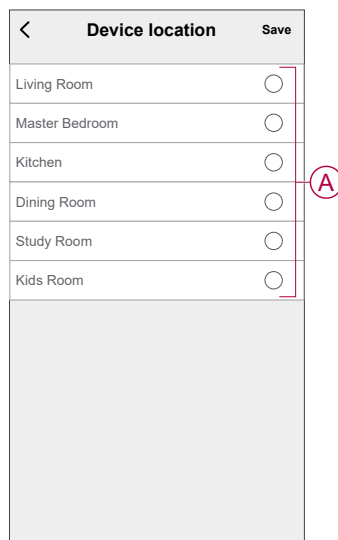

Removing the device

You can remove a device from the device list using the Wiser app,
To remove the device:

1. On the **Home** page, tap **All devices** > **Temperature Humidity Sensor**.
2. Tap  to display more details.
3. Tap **Remove and Factory Reset Device** (A) and tap **Confirm**.

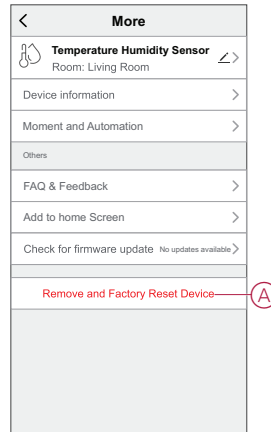


TIP: On the home page, you can tap and hold the **Temperature/Humidity Sensor** to remove the device.

NOTE: By removing the device, you will reset the device. If you still have a problem with the reset, then refer to [resetting the device](#), page 11.

Resetting the device

You can reset the sensor to factory default manually.
To reset the sensor:


1. Remove the sensor from the base plate by sliding it upwards.



- Short-press the function key 3 times (<0.5 s) and then long-press the function key once (>10 s), the LED blinks red after 10 s, and then release the function key.

Upon successful reset of the sensor, the LED stops blinking. Then, the sensor restarts and blinks green for a few seconds.

NOTE: After reset, the LED turns off to save the battery.



3x < 0,5 s + 1 x 10 s




Using the device

On the **Home** page, tap **All devices** > **Temperature Humidity Sensor** to access the control panel.

On the Sensor control panel page, you can see the following:

- Battery level (A)
- The current temperature value (B)
- The current humidity value (C)
- History (D)

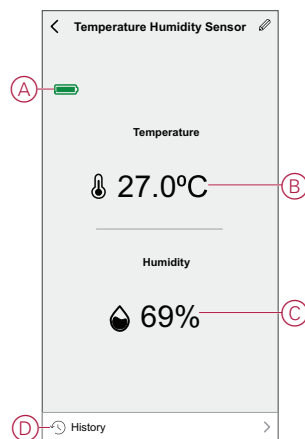


Checking the device history

You can monitor the temperature and humidity changes by accessing the device history in the Wiser app.

To see the device history:




- On the **Home** page, tap **All devices** > **Temperature Humidity Sensor**.
- On the device control panel page, tap **History**.

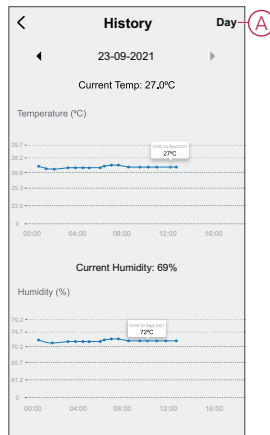
3. In the **History** page, you can see the temperature and humidity changes in the graph.
4. Tap **Day (A)** to adjust the day, week, month, or year view.




Creating an automation

An automation allows you to group multiple actions that are usually done together, triggered automatically or at scheduled times. By using the Wiser app, you can create automations based on your needs.


1. On the **Home** page, tap the .
 2. Go to **Automation** > **+** to create an automation.
 3. Tap **Edit name** , enter the name of the automation (A) and tap **Save**.
- TIP:** You can choose the cover image that represents your automation by tapping .

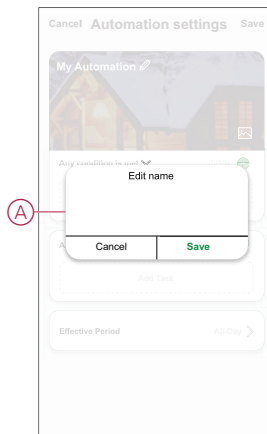


4. Tap **Any condition is met** to select any one of the condition type (B):
 - **All conditions are met-** The automation is triggered when all the conditions are met.
 - **Any condition is met-** The automation is triggered when at least one condition is met.

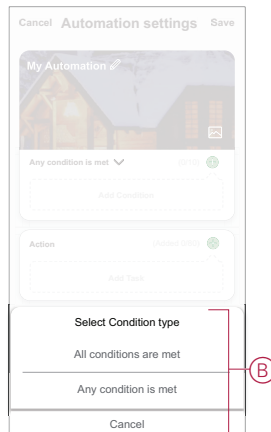


5. Tap **Add Condition** to display the slide-up menu.
6. In the **Add Condition** menu, you can do either or all of the following options (C):
 - **When weather changes-** Select the various weather settings
 - **Schedule-** Set the time and day
 - **When device status changes -** Select the device and it's function


NOTE: You can add one or more conditions using .

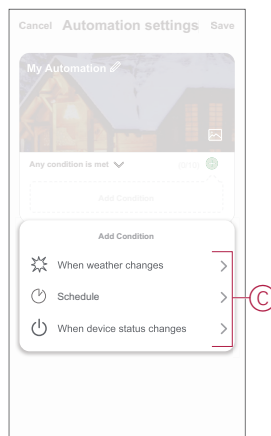


7. Tap **When device status changes > Temperature Humidity Sensor** to select either or all of the functions to add in the automation:
 - **Current temperature** - Set the temperature (D) and select the condition (E)
 - **Current humidity** - Set the humidity (F) and select the condition (G)

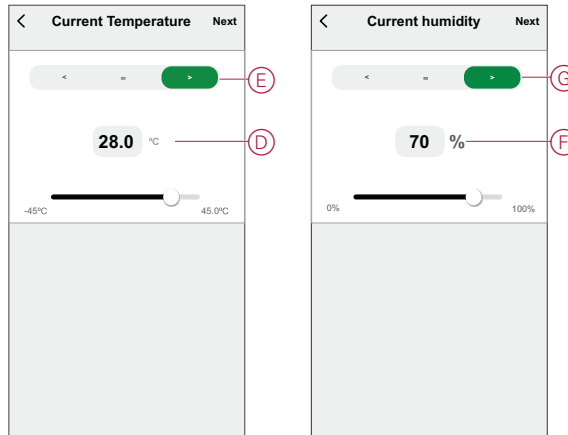


8. Tap **Add task** to display the slide-up menu.
9. In the **Add task** menu, you can do either or all of the following options (H):
 - **Run the device** - Select the devices that you want to trigger.
 - **Moment or Automation** - Select the moment which you want to trigger or select the automation that you want to enable or disable.
 - **Send notification** - Turn on notification for the automation.
 - **Delay** - Set the delay time.

NOTE: You can add one or more actions using .

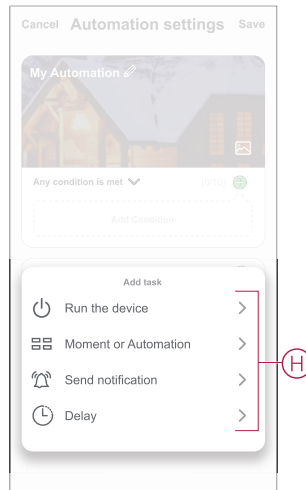

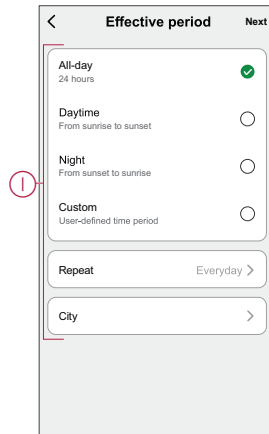


10. Tap on **Effective period** to set the time range for the automation. You can select any one of the following (I):
 - **All-day - 24 hours**
 - **Daytime - From sunrise to sunset**
 - **Night - From sunset to sunrise**
 - **Custom - User defined time period**




11. Once all the actions and conditions are set, tap **Save**.

Example of an automation


This demonstration shows you how to create an automation to open the shutter when the room is warm.

1. Go to **Automation** > **+** to create an automation.
2. Tap **Edit name** , enter the name of the automation and tap **Save**.
TIP: You can choose the cover image that represents your automation by tapping .
3. Tap **Add Condition** > **When device status changes** > **Temperature Humidity Sensor**.
4. Tap **Current temperature**, set the temperature and condition and tap **Next**.
TIP: You can set the temperature as 27 °C and the condition as > (greater than).
NOTE: The automation is triggered only if the status of the Sensor changes to a higher temperature than the set temperature. In this case, the automation is triggered when the temperature changes from 27 °C to 28 °C.
5. Tap  to add another condition and tap **When device status changes** > **Temperature Humidity Sensor**.
6. Tap **Current humidity**, set the humidity and condition and tap **Next**.
TIP: You can set the humidity as 65% and the condition as > (greater than).
NOTE: The automation is triggered only if the status of the Sensor changes to a higher humidity than the set humidity. In this case, the automation is triggered when the humidity changes from 65% to 66%.
7. Tap **Add task** > **Run the device** > **Shutter**.
8. Tap **Control (A)**, select **Shutter Open** and tap **Save**.
9. Tap **Percentage (B)**, set the shutter open percentage and tap **Save**.

10. Tap **Next**.

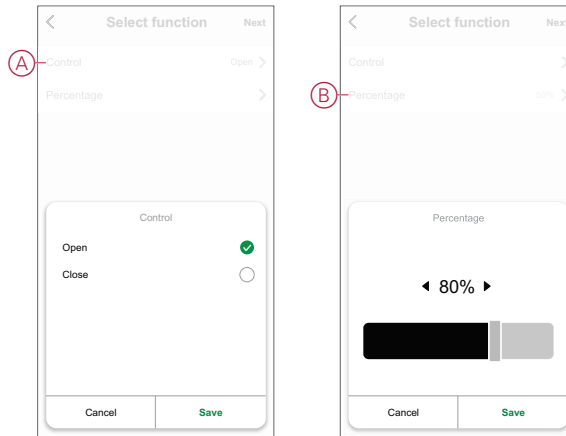

11. In the **Automation Settings** page, tap **Save**.

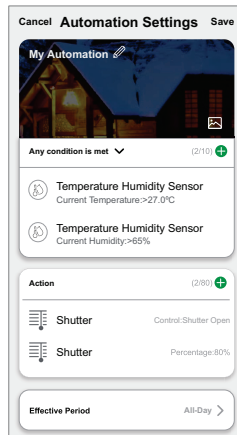


Once the automation is saved, it is visible on the **Automation** tab. You can tap the toggle switch on the automation to enable it.

Editing an automation

1. On the **Automation** tab, locate the automation you want to edit and tap ●●●.
2. On the **Edit** page, you can tap each item (such as dimmer, shutter, delay, temperature, etc.) to change the settings.

TIP:

- You can add one or more condition or actions using .
- To delete an existing condition or action, slide each item towards left and tap **Delete**.

Deleting an automation

1. On the **Automation** tab, locate the automation that you want to delete and then tap ●●●.
2. Tap **Delete** and then tap **Ok**.

NOTE: After deleting an automation, the device action can no longer be triggered.

Replacing the battery

To replace the batteries:


1. Remove the sensor from the base plate by sliding it upwards.
2. Unscrew the battery cover using a screwdriver.

NOTE: The screw is captive, after unscrewing from the primary part it remains attached to the cover.

3. Replace the battery with the proper polarity.
4. Re-install the battery cover and tighten the screw using a screwdriver.
The LED blinks green seven times and then stops blinking.

5. Install the sensor on the base plate by sliding it down.

NOTE: Dispose used batteries, as per statutory regulations.

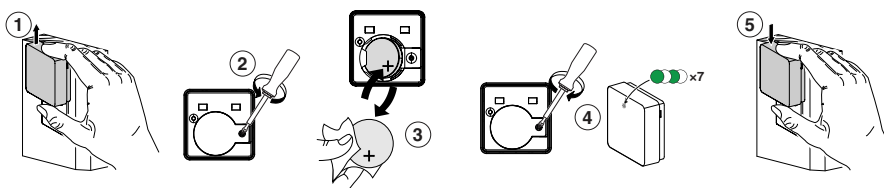

LED indications

Initial Stage

| Action | LED Indication | Status |
|---------------------------------|----------------|---|
| Green LED blinks 7 times (1 Hz) | → (7x) → | After the sensor is powered On for the first time or after the batteries were replaced. |

If not paired yet

| Action | LED Indication | Status |
|-------------------------------|--------------------------|---|
| Amber LED blinks (1 Hz) | → (2 min) → → (3 sec) → | Indicates the pairing mode after function key is pressed 3 times within 1 second. If pairing is not successful, the amber LED is On for 3 seconds and then turns Off. |
| Green LED is On for 3 seconds | → (3 sec) → | Pairing was successful. |


If already paired

| Action | LED Indication | Status |
|--|----------------|---|
| Green LED blinks 5 times (1 Hz) | → (5x) → | The sensor is paired and connected. |
| An amber LED blinks for three seconds (4 Hz) | → (3 sec) → | The sensor is paired, but disconnected. |

Reset - After pressing the function key 3 times within 0.5 seconds and then hold for 10 seconds

| Action | LED Indication |
|---|------------------------------|
| The red LED blinks for 10 seconds, remains on for 3 seconds, and then turns off. The sensor then restarts and blinks green for a few seconds. | → (10 sec) → → (3 sec) → → |


Battery level

| LED Indication | Status |
|--|---|
| LED blinks amber once per minute.  | The battery is low (< 10%), replace the battery, page 19. NOTE: A notification pop-up will appear on the app. |

Troubleshooting

| Symptom | Possible cause | Solution |
|---|---|--|
| The sensor triggers the automation/schedule, but does not show the status on the app. | The sensor may be undergoing an over-the-air (OTA) firmware update. | Wait for the firmware update to complete and then check that the sensor is reporting status. NOTE: The firmware update runs in the background. |
| LED blinks amber. | The sensor battery is low or drained. | Replace the battery in the device, page 19 NOTE: A notification pop-up will appear on the app. |

Technical Data

| | |
|--|---|
| Battery | 3 VDC, CR2450 |
| Battery life | Up to 5 years (may vary based on the usage, frequency of firmware update and environment) |
| Nominal power | ≤90 mW |
| IP rating | IP20 |
| Operating frequency | 2405 – 2480 MHz |
| Max. radio-frequency power transmitted | ≤7 dBm |
| Operating temperature | -10 °C to 50 °C |
| Temperature accuracy | ±1.5 °C |
| Temperature resolution | 0.1 °C |
| Relative humidity | 10 % to 95 % |
| Humidity accuracy | ±5 % |
| Dimensions (H x W x D) | 45 x 45 x 17.2 mm |
| Communication protocol | Zigbee 3.0 certified |
| Compliance |  |

Compliance

Compliance information for Green Premium products

Find and download comprehensive information about Green Premium products, including RoHS compliance and REACH declarations as well as Product Environmental Profile (PEP) and End-of-Life instructions (EOLI).

<https://checkaproduct.se.com/>



General information about Green Premium products

Click the link below to read about Schneider Electric's Green Premium product strategy.

<https://www.schneider-electric.com/en/work/support/green-premium/>



Trademarks

This guide makes reference to system and brand names that are trademarks of their relevant owners.

- Zigbee® is a registered trademark of the Connectivity Standards Alliance.
- Apple® and App Store® are brand names or registered trademarks of Apple Inc.
- Google Play™ Store and Android™ are brand names or registered trademarks of Google Inc.
- Wi-Fi® is a registered trademark of Wi-Fi Alliance®.
- Wiser™ is a trademark and the property of Schneider Electric, its subsidiaries and affiliated companies.

Other brands and registered trademarks are the property of their respective owners.

Schneider Electric (Australia) Pty Ltd
33-37 Port Wakefield Road
92500 Gepps Cross SA 5094
Australia

Customer Care: 13 73 28

www.clipsal.com

As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.

© 2023 – 2023 Schneider Electric. All rights reserved.

DUG_Temperature and Humidity Sensor_CLP-00